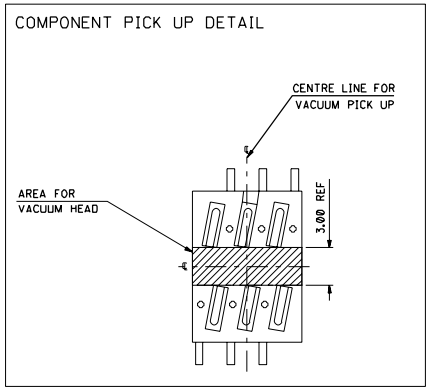



A - A

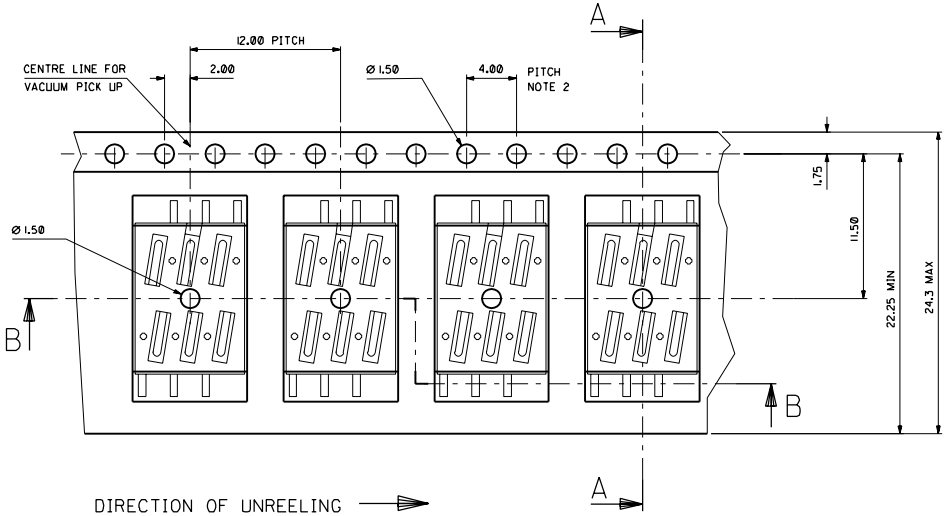

B - B

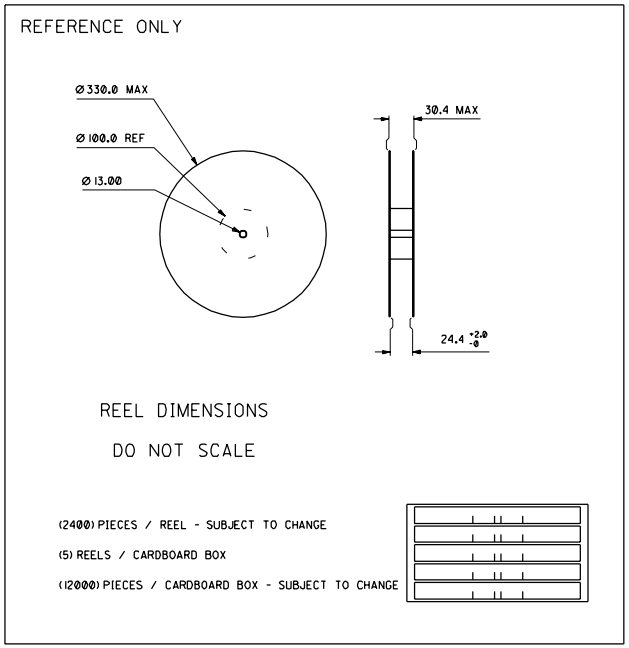

NOTES:

1) MATERIAL :
   CARRIER TAPE : VOLUME CONDUCTIVE POLYSTYRENE , 0.40 REF THICK , BLACK
   COVER TAPE : COLD SEAL POLYESTER , 0.06 REF THICK , TRANSPARENT
2) PITCH TOLERANCE OVER ANY 10 PITCHES ±0.20
3) PEEL FORCE OF THE COVER TAPE IS 0.2N TO 1.0N
   AT A MAXIMUM PEEL SPEED OF 300/min. ±10%
4) REFERENCE TO EIA-481-2



MOLEX REEL

CARRIER TAPE MOD.	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES: (UNLESS SPECIFIED)			SCALE 5 : 1	DESIGN UNITS ☒mm ☐INCH	THIRD ANGLE PROJECTION	DIMENSIONS: ☐ mm/INCH ☐ INCH/mm ☒ mm ONLY	SHT / REV
EC NO. E2001-1278		MAJOR ▼ =		mm	INCH	DRAWN BY & DATE DBRENNAN 99/03/15		TITLE: PKG FOR SIM CONN		REVISE ON CAD ONLY
DRWN: B MURPHY 01/05/29		CRITICAL (C) =	4 PLACES	±0.	±.	CHECKED BY & DATE EFOLAN 99/03/15				
CHK: / /			3 PLACES	±0.	±.	APPROVED BY & DATE MWILHITE 99/03/15		MOLEX INCORPORATED		
APPR: / /			2 PLACES	±0.10	±.	CAD FILENAME .		MATERIAL NO. 91362-0001	DRAWING NO. SD-91362-005	SHEET NO. 1 OF 1
C	REV		1 PLACE	±0.20	±.					SIZE D
			ANGULAR: ± 1/2°							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS					THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		