



<u>Characteristics</u>	<u>Band 1</u>	<u>Band 2</u>
Passband:	849-850.5 MHz	894-895.5 MHz
Bandwidth:	$F_o \pm 0.75$ MHz	$F_o \pm 0.75$ MHz
Passband Return Loss:	18 dB min	18 dB min
Passband Insertion Loss:	2.5 dB max	2.5 dB max
Passband Ripple:	1.2 dB max	1.2 dB max
Input / Output Impedance:	50 Ohms	50 Ohms
Isolation:	40 dB	40 dB
Power Handling:	1 W max	1 W max


<u>Mechanical</u>	
Mounting Method:	SMT
Dimensions:	42.5 x 17.5 x 9.5 mm

<u>Environmental</u>	
Operating Temperature:	-40 to +85 deg.C
Storage Temperature:	-50 to +90 deg.C



This product is RoHs compliant.

**Outline Drawing:**

**TOP VIEW**

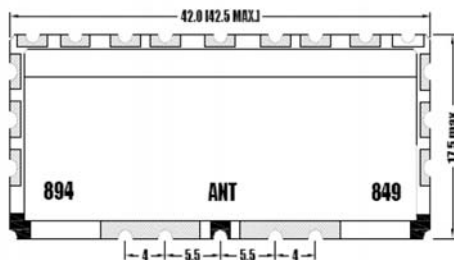

**BOTTOM VIEW**

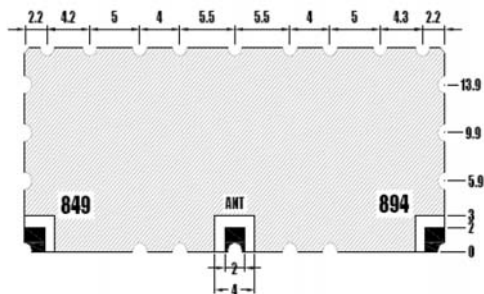

**I/O PORT**

**GROUND**

**TOLERANCE:  $\pm 0.20$**

**UNIT: mm**