


# Ring Tongues - Nylon Insulated Brazed Seam 8 AWG



Product Number <sup>†</sup>	UPC (054007-)	Wire	Stud Size	W	C	L	E	Thickness	Barrel Length	Barrel I.D.	Maximum Insulation Diameter	Terminals per:	
		Range (AWG)										Carton	Case
MN8-10R/SK	08267	8	10	0.47	0.40	1.26	1.03	0.050	0.31	0.175	0.340	—	200
MN8-14R/SX	15652	8	1/4	0.47	0.40	1.26	1.03	0.050	0.31	0.175	0.340	25	250
MN8-14R/SK	08268	8	1/4	0.47	0.40	1.26	1.03	0.050	0.31	0.175	0.340	—	200
MN8-516RK	08269	8	5/16	0.59	0.45	1.38	1.08	0.050	0.31	0.175	0.340	—	200
MN8-38RK	08270	8	3/8	0.59	0.45	1.38	1.08	0.050	0.31	0.175	0.340	—	200
MN8-12R/SK	08271	8	1/2	0.81	0.69	1.72	1.32	0.050	0.31	0.175	0.340	—	200

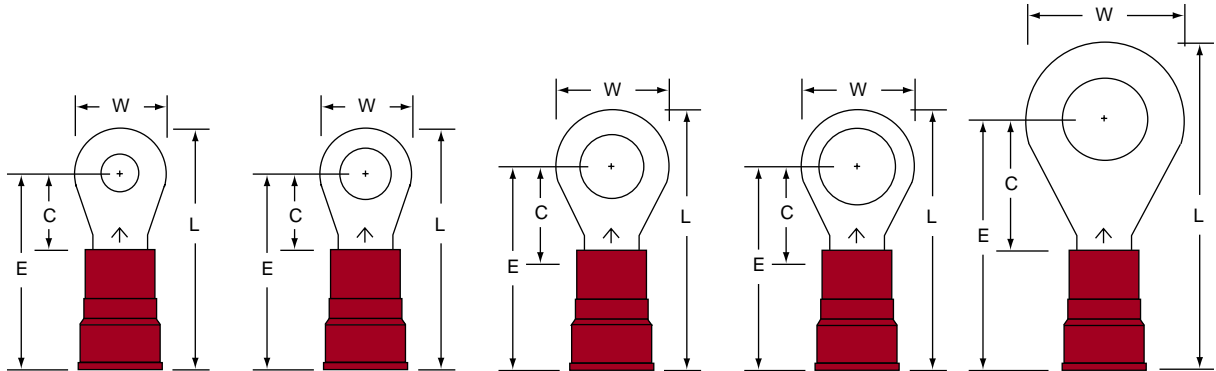

**MN8-10R/S**

10

8

**Stud Size  
Wire Range**

**MN8-14R/S**

1/4

8

**MN8-516R**

5/16

8

**MN8-38R**

3/8

8

**MN8-12R/S**

1/2

8