

# Frequency Mixer WIDE BAND

## SIM-43H+

Level 17 (LO Power +17 dBm) 1000 to 4000 MHz



Generic photo used for illustration purposes only

CASE STYLE: HV1195

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	100mW

For extended temperature range, consult factory.  
Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

LO	8
RF	4
IF	2
GROUND	1,3,5,6,7

### Features

- wide bandwidth, 1000 to 4000 MHz, useable down to 800 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 35 dB typ.
- LTCC double balanced mixer
- tiny size, low profile, 0.08"
- useable as up and down converter
- aqueous washable
- protected by US patent 7,027,795


### Applications

- cellular
- defense & weather radar
- defense communications
- PCN
- WCDMA
- WIFI
- blue tooth
- VSAT
- ISM

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

**Available Tape and Reel at no extra cost**  
Reel Size: 7" Devices/Reel: 10, 20, 50, 100, 200, 500


### Outline Drawing

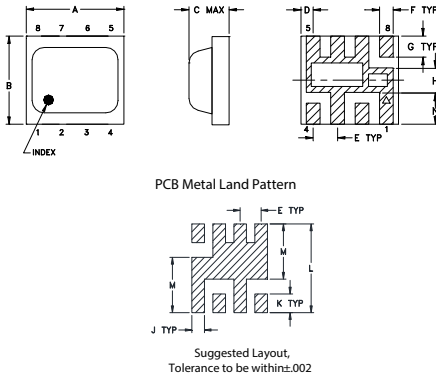

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.180	.087	.025	.050	.028	.043
5.08	4.57	2.2098	0.64	1.27	0.71	1.09
H	J	K	L	M	N	wt
.050	.030	.043	.204	.127	0.065	grams
1.27	0.76	1.09	5.18	3.23	1.65	0.08

### Demo Board MCL P/N: TB-382 Suggested PCB Layout (PL-239)



- NOTES:  
1. TRACE WIDTH AND GAP ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020"\*.0015". COPPER: 1/2 OZ. EACH SIDE.  
FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).  
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

### Electrical Specifications


FREQUENCY (MHz)	CONVERSION LOSS* (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
	LO/RF $f_L-f_U$	IF	Typ. $\sigma$ Max.	Typ.	Min.	Typ.	Min.	
1000-4000	DC-1500		6.5 0.1 8.6	37	32	24	9	22
1000-2500			5.7 0.1 8.6	34	28	20	12	24

1 dB Compression: +14 dBm typ.  
\* Conversion loss at 30 MHz IF.  $\sigma$  is a measure of repeatability from unit to unit.

### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
975.00	1005.00	7.97	35.59	2.35	2.23
1050.00	1080.00	7.48	39.31	2.71	1.56
1200.00	1230.00	6.87	42.50	3.04	1.22
1350.00	1380.00	6.46	40.87	3.16	1.61
1500.00	1530.00	6.32	38.93	3.10	1.65
1650.00	1680.00	6.49	36.73	30.94	2.99
1800.00	1830.00	6.62	38.21	23.39	2.59
2025.00	2055.00	6.45	36.69	14.20	2.47
2100.00	2130.00	6.56	36.90	13.59	2.46
2250.00	2280.00	6.91	37.09	14.23	2.57
2400.00	2430.00	6.43	36.52	16.01	2.21
2550.00	2580.00	7.46	37.89	17.58	2.91
2700.00	2730.00	6.37	36.23	20.10	2.43
2850.00	2880.00	6.12	32.81	21.75	1.93
3000.00	3030.00	5.65	36.85	25.56	1.52
3105.00	3135.00	5.57	35.17	31.30	1.40
3180.00	3210.00	5.54	35.28	37.78	1.33
3540.00	3570.00	6.45	33.40	22.10	1.86
3900.00	3930.00	7.66	32.59	17.74	2.54
4080.00	4110.00	7.54	34.81	18.91	2.65









### Electrical Schematic

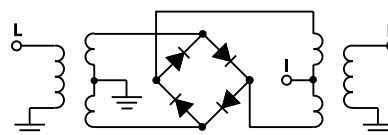

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



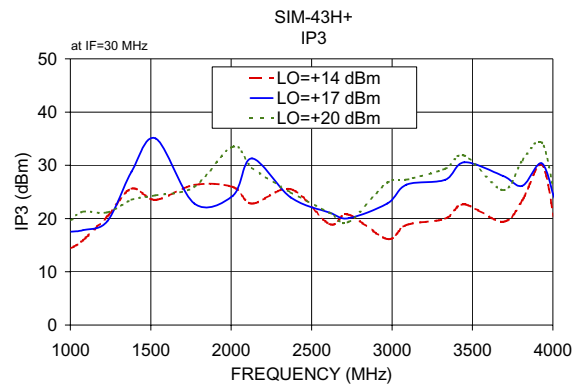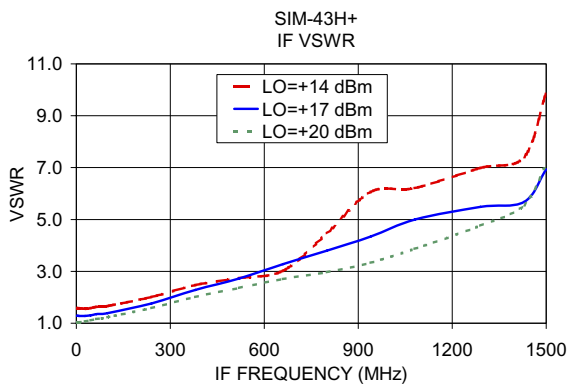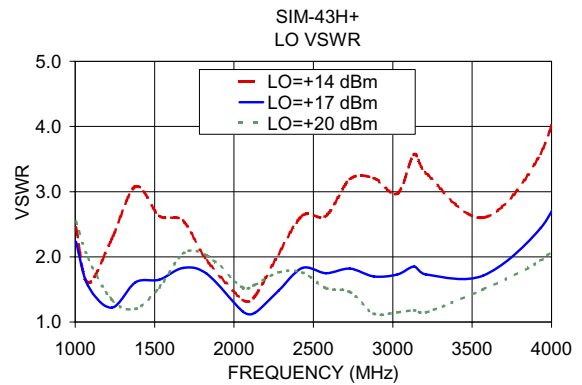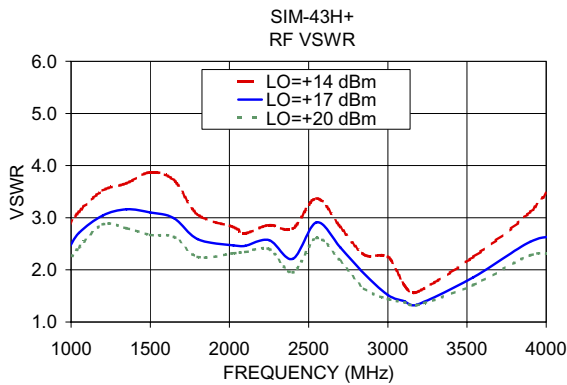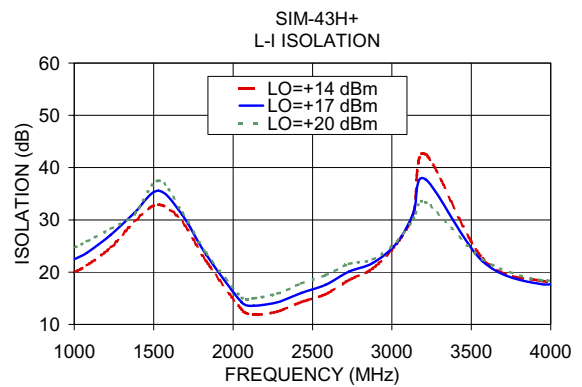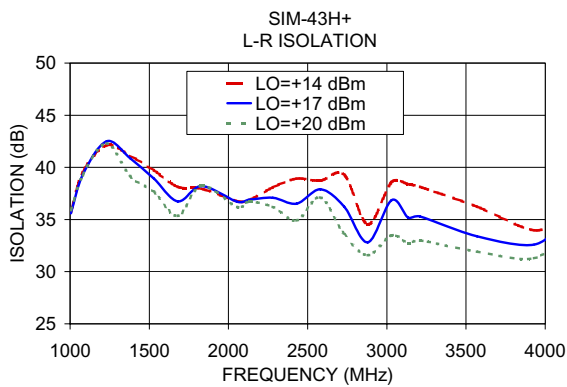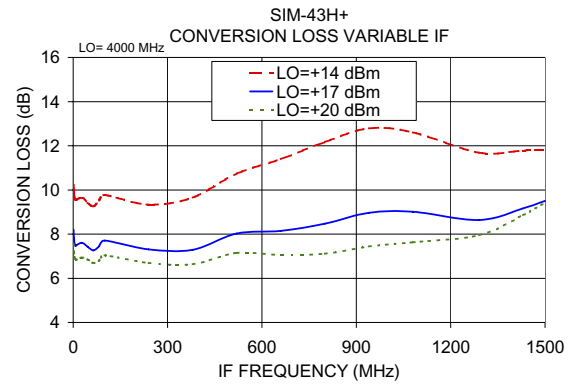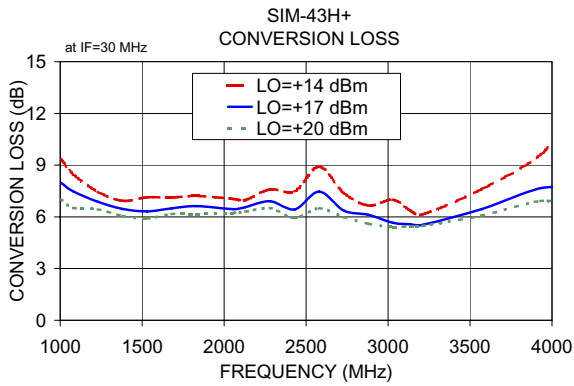

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

