



Electrical specifications

Center Frequency: 3394 MHz
Bandwidth: 12 MHz
Input / Output Impedance: 50 Ohms
Passband: 3388-3400 MHz
Passband Insertion Loss: 3 dB max
Passband Ripple: 0.5 dB max
Passband Return Loss: 15 dB min
Rejection: DC-2500 MHz: 35 dBc min
Rejection 2: @ 2904-2916 MHz: 40 dBc min
Rejection 3: @ 3146-3158 MHz: 35 dBc min
Rejection 4: @ 3267-3279 MHz: 30 dBc min
Rejection 5: @ 3312-3324 MHz: 20 dBc min
Rejection 6: @ 4000 MHz: 35 dBc min
Power Handling: 1 W max

Mechanical


Mounting Method: SMT
Dimensions: 8 x 6.8 x 3 mm

Environmental

Operating Temperature: -40°C to +85°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

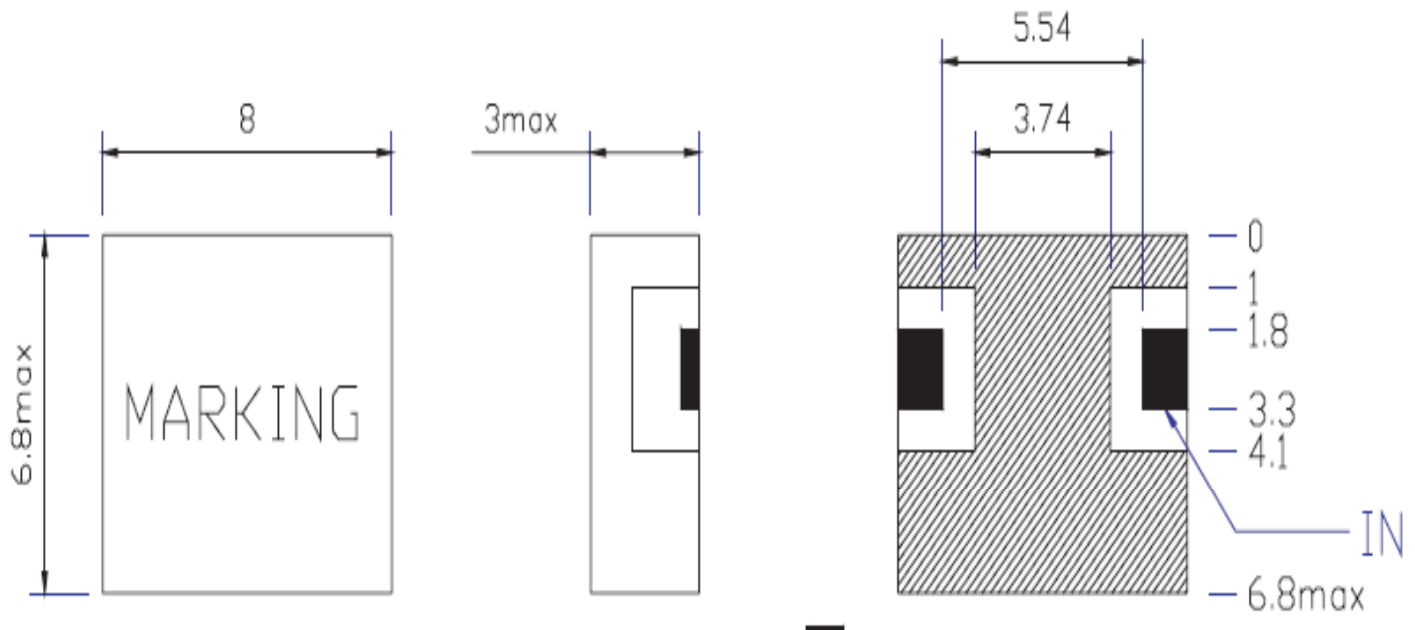



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products


3394 MHz Ceramic Bandpass Filter

Part Number: AM3394B528



Response Plot:

S21 & S11 (Attenuation, Return Loss)

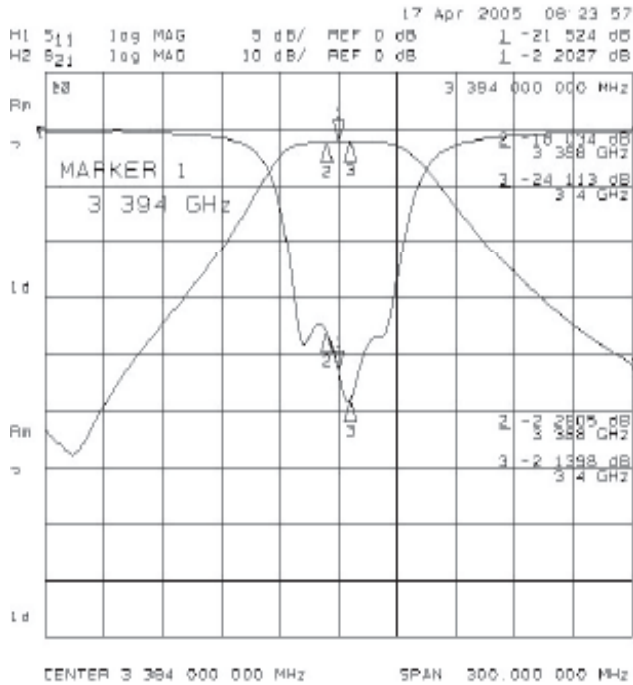

S1 & S11 (Ripple)

