


Data sheet

chainflex® CF30





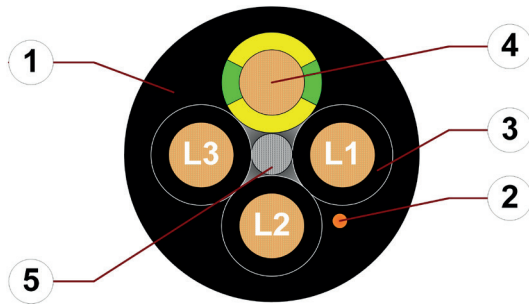



Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



1. Outer jacket: Pressure extruded, gusset-filling, oil-resistant PVC mixture
2. CFRIP: Tear strip for faster cable stripping
3. Core insulation: Mechanically high-quality, especially low-capacitance XLPE mixture
4. Conductor: Especially bending-stable version consisting of bare copper wires
5. Strain relief: Tensile stress-resistant centre element

Example image
For detailed overview please see design table

Cable structure

| | | |
|---|----------------------------|--|
|  | Conductor | Cores < 10 mm²: Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228). Cores ≥ 10 mm²: Conductor cable consisting of pre-leads (following DIN EN 60228). |
|  | Core insulation | Mechanically high-quality, especially low-capacitance XLPE mixture. |
|  | Core structure | Cores wound with a short pitch length around a high tensile strength centre element. |
|  | Core identification | Black cores with white numbers, one green-yellow core. 1. Core: U / L1 / C / L+ 2. Core: V / L2 3. Core: W / L3 / D / L- 4. Core: 4 / N |
|  | Outer jacket | Low-adhesion, oil-resistant PVC mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-4-1). Colour: Jet black (similar to RAL 9005) Printing: white |
|  | CFRIP® | Strip cables faster: a tear strip is moulded into the outer jacket Video ▶ www.igus.eu/CFRIP |

„00000 m** igus chainflex CF30.--.---① ----② 600/1000V E310776

cRUus AWM Style 2570 VW-1 AWM I/II A/B 80°C 1000V FT1 EAC CE UKCA

RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
① / ② Cable identification according to Part No. (see technical table).
Example: ... chainflex **CF30.15.04 4G1.5 600/1000V** ...



Data sheet







chainflex® CF30



Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Dynamic information

| | | | |
|--|------------------------|---|---|
|  | Bend radius | e-chain® linear flexible fixed | minimum 7.5 x d minimum 6 x d minimum 4 x d |
|  | Temperature | e-chain® linear flexible fixed | +5 °C up to +70 °C -5 °C up to +70 °C (following DIN EN 60811-504) -15 °C up to +70 °C (following DIN EN 50305) |
|  | v max. | unsupported gliding | 10 m/s 5 m/s |
|  | a max. | | 80 m/s ² |
|  | Travel distance | | Unsupported travels and up to 100 m for gliding applications, Class 5 |
|  | Torsion | | Torsion ± 90°, with 1 m cable length |



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

| Double strokes | 5 million | 7.5 million | 10 million |
|----------------------------------|----------------------------|----------------------------|----------------------------|
| Temperature, from/to [°C] | R min. [factor x d] | R min. [factor x d] | R min. [factor x d] |
| +5/+15 | 10 | 11 | 12 |
| +15/+60 | 7.5 | 8.5 | 9.5 |
| +60/+70 | 10 | 11 | 12 |

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

| | | |
|---|------------------------|--|
|  | Nominal voltage | 600/1000 V (following DIN VDE 0298-3) 1000 V (following UL) |
|  | Testing voltage | 4000 V (following DIN EN 50395) |



Example image

Data sheet














chainflex® CF30



Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Properties and approvals

-  **UV resistance** Medium
-  **Oil resistance** Oil-resistant (following DIN EN 50363-4-1), Class 2
-  **Flame retardant** According to IEC 60332-1-2, Cable Flame, VW-1, FT1, FT2 / Horizontal Flame
-  **Silicone-free** Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
-  **UL verified** Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
-  **UL/CSA AWM** Details see table UL/CSA AWM
-  **NFPA** Following NFPA 79-2018, chapter 12.9
-  **EAC** Certificate No. RU C-DE.ME77.B.02324 (TR ZU)
-  **REACH** In accordance with regulation (EC) No. 1907/2006 (REACH)
-  **Lead-free** Following 2011/65/EC (RoHS-II/RoHS-III)
-  **Cleanroom** According to ISO Class 2. The outer jacket material of this series complies with CF5.10.07 - tested by IPA according to standard DIN EN ISO 14644-1
-  **CE** Following 2014/35/EU
-  **UKCA** In accordance with the valid regulations of the United Kingdom (as at 08/2021)

Properties and approvals

UL/CSA AWM Details

| Conductor nominal cross section [mm ²] | Number of cores | UL style core insulation | UL style outer jacket | UL Voltage Rating [V] | UL Temperature Rating [°C] |
|--|-----------------|--------------------------|-----------------------|-----------------------|----------------------------|
| 1.5 | 4 | 3646 | 2570 | 1000 | 80 |
| 2.5 | 4-5 | 3646 | 2570 | 1000 | 80 |
| 4 | 4-5 | 3646 | 2570 | 1000 | 80 |
| 6 | 4-5 | 3646 | 2570 | 1000 | 80 |
| 10 | 4-5 | 3646 | 2570 | 1000 | 80 |
| 16 | 4-5 | 3646 | 2570 | 1000 | 80 |
| 25 | 4 | 3646 | 2570 | 1000 | 80 |
| 35 | 4 | 3646 | 2570 | 1000 | 80 |
| 50 | 4 | 3646 | 2570 | 1000 | 80 |



Example image

Data sheet

chainflex® CF30




Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant



Example image

Typical lab test setup for this cable series

| | |
|--------------------|--------------------------------------|
| Test bend radius R | approx. 55 - 250 mm |
| Test travel S | approx. 1 - 15 m |
| Test duration | minimum 2 - 4 million double strokes |
| Test speed | approx. 0.5 - 2 m / s |
| Test acceleration | approx. 0.5 - 1.5 m / s ² |

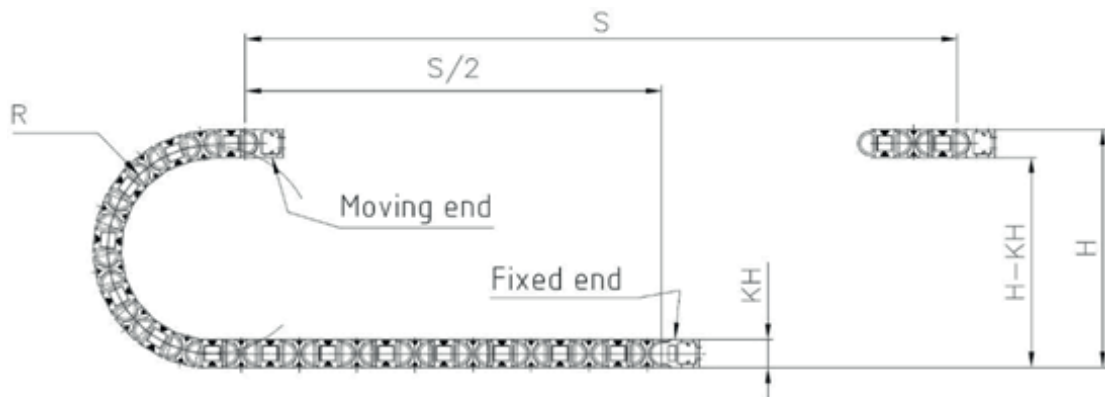

Typical application areas

- For heavy duty applications, Class 5
- Unsupported travel distances and up to 100 m for gliding applications, Class 5
- Light oil influence, Class 2
- Torsion ± 90°, with 1 m cable length, Class 2
- Preferably indoor applications, but also outdoor ones at temperatures > 5 °C
- Storage and retrieval units for high-bay warehouses, machining units/package machines, quick handling, indoor cranes



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF30



Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant

Technical tables:

Mechanical information

| Part No. | Number of cores and conductor nominal cross section [mm ²] | Outer diameter (d) max. [mm] | Copper index [kg/km] | Weight [kg/km] |
|-------------|--|------------------------------|----------------------|----------------|
| CF30.15.04 | 4G1.5 | 8.0 | 61 | 104 |
| CF30.25.04 | 4G2.5 | 10.0 | 100 | 166 |
| CF30.25.05 | 5G2.5 | 11.0 | 124 | 203 |
| CF30.40.04 | 4G4.0 | 11.5 | 163 | 249 |
| CF30.40.05 | 5G4.0 | 12.5 | 204 | 302 |
| CF30.60.04 | 4G6.0 | 13.5 | 237 | 343 |
| CF30.60.05 | 5G6.0 | 15.0 | 297 | 410 |
| CF30.100.04 | 4G10 | 16.5 | 407 | 548 |
| CF30.100.05 | 5G10 | 19.5 | 515 | 684 |
| CF30.160.04 | 4G16 | 20.0 | 646 | 826 |
| CF30.160.05 | 5G16 | 23.5 | 815 | 1067 |
| CF30.250.04 | 4G25 | 25.0 | 1014 | 1320 |
| CF30.350.04 | 4G35 | 28.5 | 1439 | 1795 |
| CF30.500.04 | 4G50 | 34.0 | 2061 | 2528 |

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core x = without earth core

Electrical information

| Conductor nominal cross section [mm ²] | Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km] | Max. current rating at 30 °C [A] |
|--|---|----------------------------------|
| 1.5 | 13.3 | 19 |
| 2.5 | 7.98 | 27 |
| 4 | 4.95 | 37 |
| 6 | 3.3 | 48 |
| 10 | 1.91 | 69 |
| 16 | 1.21 | 92 |
| 25 | 0.78 | 121 |
| 35 | 0.56 | 152 |
| 50 | 0.39 | 191 |

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image
igus® chainflex® CF30



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



Data sheet

chainflex® CF30



Motor cable (Class 5.5.2.2) ● For heavy duty applications ● PVC outer jacket ● Oil-resistant ● Flame retardant

Design table

| Part No. | Number of cores | Core design |
|------------|-----------------|-------------|
| CF30.XX.04 | 4 | |
| CF30.XX.05 | 5 | |



Example image



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

