


MODEL NO.	"L"	P/N
PIT46UM3-VL	2000	87548
PIT43UM3-VL	1000	87547

NOTES:



1. OPERATING TEMPERATURE -55°C ~ +70°C.
2. MINIMUM BEND RADIUS R25.

1X Ø1 FIBER OPTIC CORE



DETAIL A
SCALE 8:1

SEE DETAIL A

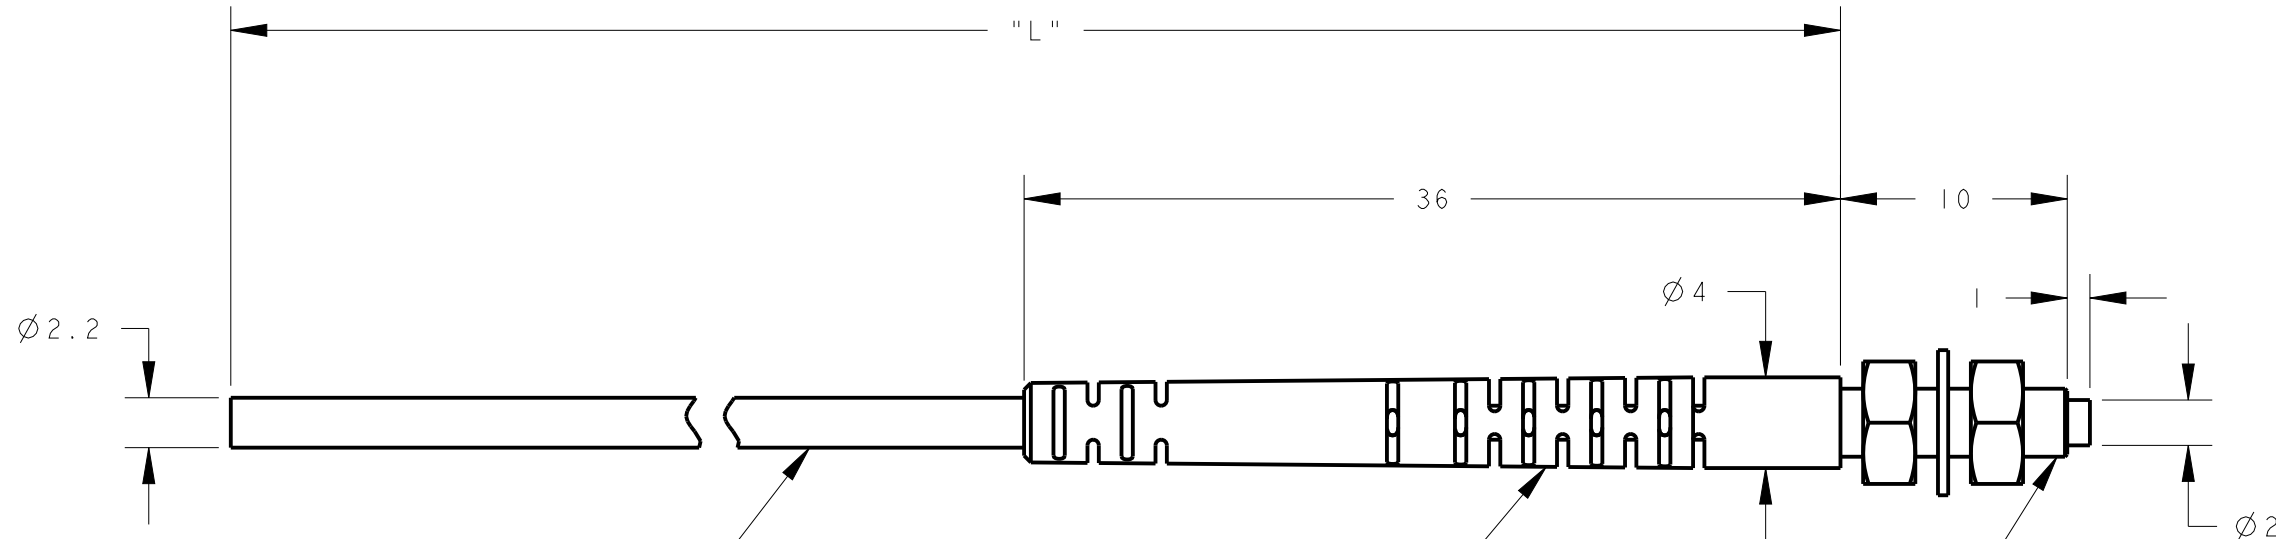

POLYETHYLENE

PVC FLEX-RELIEF

M3 X 0.5
NICKEL PLATED BRASS
2X JAM NUTS (5MM ACROSS
FLATS X 2.2MM THICK)
2X ITLW (Ø6.4MM) INCLUDED

This drawing is the property of BANNER ENGINEERING CORP. Any use or reproduction, in any form, without prior written permission of Banner is prohibited. © 2015 Banner Engineering Corp.



BANNER ENGINEERING CORP.
www.bannerengineering.com

TITLE

PIT4 M3 VALUE LINE SERIES UNTERMINATED

SIZE B

DRAWING NO. **178354**

REV. **B**

SCALE 3:1

SHEET 1 OF 1

CREO

- NOTES:**
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES] UNLESS OTHERWISE NOTED.
 2. REFER TO "www.bannerengineering.com" FOR ADDITIONAL DATA AND SPECIFICATIONS.

