


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #7366	11/24/08	D.N.

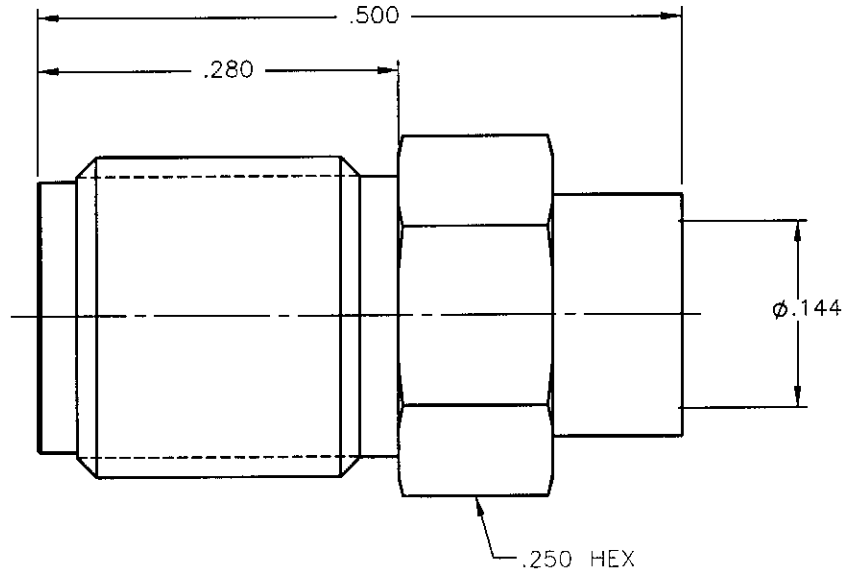

NOTES:

MATERIALS:


1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .000050 TO .00010 STRESS FREE NICKEL PER QQ-N-290.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

Property of Radiall Incorporated
 This document cannot be reproduced or
 communicated to a third party without prior
 written permission of RADIALL Incorporated.

9402-1083-009

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	DWN:	DATE	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513 a RADIALL company
	D.N.	11/24/08	
DECIMAL	ANGLE	CHKD:	SMA STRAIGHT JACK DIRECT SOLDER TYPE FOR .141 S/R & SIMILAR CABLES
		A.D.M.	
		APVD:	SIZE A FSCM NO. 19505 DWG NO. 9402-1083-009 REV A SCALE 7:1 THIRD ANGLE PROJECTION
		J.M.	
REFERENCE:	MATERIALS & FINISHES:		SHEET 1 OF 1
ORIGINATED: D.N. DATE: 12/02/98	SEE NOTES		