


## 2 x 4" 250W AC-DC Power Supplies

<https://product.tdk.com/en/power/cus-m>  
[www.emea.lambda.tdk.com/cus250m](http://www.emea.lambda.tdk.com/cus250m)

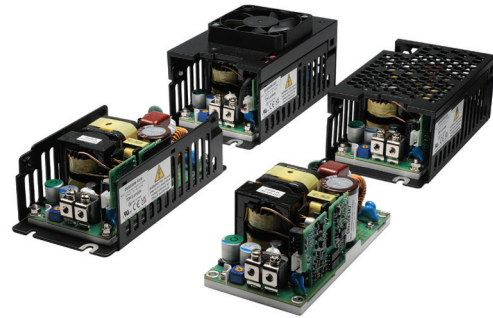


The compact CUS250M is packaged in the industry standard 2x4" footprint. The series can deliver 250W with forced air or conduction cooling in ambient temperatures of up to 50°C. With Medical & ITE certifications, the unit can be used in both Class I & Class II (no ground wire) applications, and meets Class B Conducted and Radiated EMI with generous margins. Options include a 5V standby voltage, remote on/off, DC\_OK and AC\_Fail signals, with a U channel, cover or top fan mechanical construction.

Features	Benefits
• Up to 250W Utilizing Convection and Conduction Cooling	• Quiet Operation
• Operation in Ambient Temperatures of up to 85°C	• Suitable for High Ambient Temperature Environments
• Medical Certifications (2 x MOPP)	• Suitable for B and BF Type Medical Equipment
• Class B Conducted and Radiated EMI with Significant Margins	• Easier System EMC Compliance
• Suitable for Class I and Class II installations	• Flexible Utilisation
• Compact 2 x 4 x 1.56" / 50.8 x 101.6 x 39.5mm Size	• Space Saving in End Equipment
• Enclosure & Cooling Options	• Versatile Application
• EN60335-1 Compliant	• Suitable for Household and Similar Electrical Appliances

Model Selector					
Model	Nominal Output Voltage (V)	Output Adjustment <sup>(1)</sup> (V)	Fan Supply (V)	Maximum Current Forced Air (A)	Maximum Power Forced Air (W)
CUS250M-12	12	12 - 13.2	11.4	20.83	250
CUS250M-15	15	15 - 16.5	11.4	16.66	250
CUS250M-18	18	18 - 19.8	11.4	13.88	250
CUS250M-24	24	24 - 26.4	11.4	10.41	250
CUS250M-28	28	28 - 30.8	11.4	8.92	250
CUS250M-36	36	36 - 39.6	11.4	6.94	250
CUS250M-48	48	48 - 52.8	11.4	5.2	250

Contact Factory for availability - expected Q4 2023

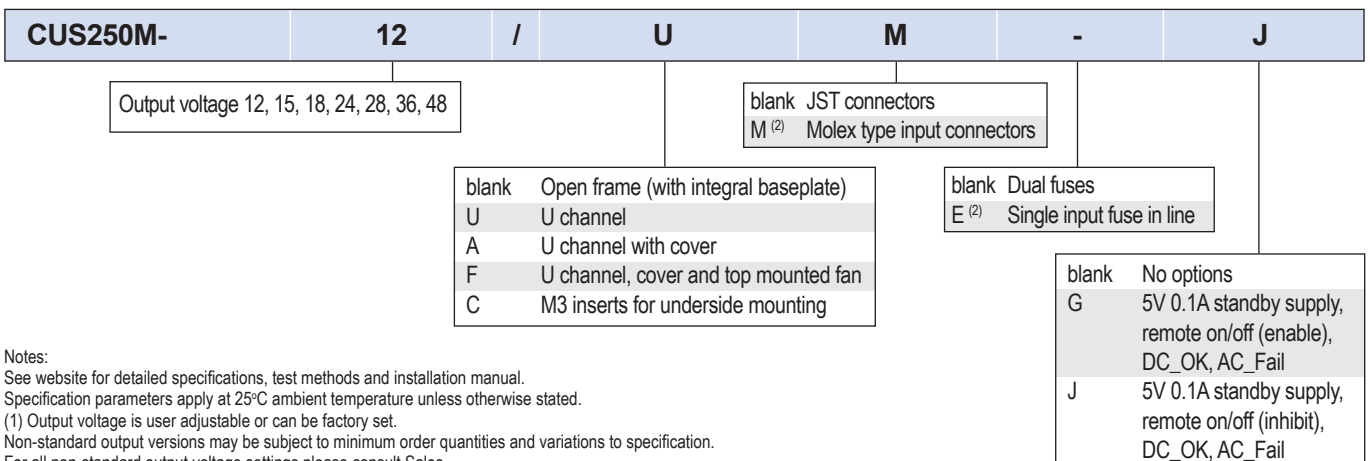

Notes:  
 See website for detailed specifications, test methods and installation manual.  
 Specification parameters apply at 25°C ambient temperature unless otherwise stated.  
 (1) Output voltage is user adjustable or can be factory set.  
 Non-standard output versions may be subject to minimum order quantities and variations to specification.  
 For all non-standard output voltage settings please consult Sales.  
 (2) Subject to Minimum Order Quantities. Please contact Sales

Specifications		
Model		CUS250M
<b>Input</b>		
Input Voltage range	Vac	85 - 264 <sup>(3)</sup>
Input Frequency	Hz	47 - 63 <sup>(4)</sup>
Input Current (100Vac)	A	3.2
Inrush Current at 230Vac (Cold Start)	A	<75. Note: the inrush I <sup>2</sup> t is significantly below the rating of the internal 5A fast acting fuse, or an external circuit breaker
Leakage Current	uA	<150 at 264Vac 63Hz
Touch Current (Enclosure Leakage)	uA	Class I: <10, Class II: <70, at 264Vac 63Hz
Power Factor (115/230Vac)	-	>0.9 / >0.7 (>20% load)
Harmonic Compliance	-	Meets IEC61000-3-2 Class A
No Load Power Consumption	W	<0.5 (230Vac) when output is inhibited
Hold Up Time	ms	>14
Efficiency	%	Up to 94
Average Efficiency	%	>91 Measured at 25%, 50%, 75% and 100% load conditions
Conducted & Radiated EMI	-	EN55032 / EN55011-B (See application notes for conditions)
Immunity	-	Compliant with EN60601-1-2:2015 (Edition 4), see immunity table
Insulation Class	-	Construction suitable for Class I or Class II installation
Safety Certifications and Markings	-	IEC/ES/EN60601-1, IEC/UL/EN62368-1, 60950-1. Compliant to IEC/EN60335-1 and IEC/EN61010-1, CE Mark and UKCA Mark

## Notes:

(3) Derate output power linearly to 225W load from 100 to 90Vac input and to 200W from 90 to 85Vac input

(4) For operation at 440Hz please consult Technical Sales.


Immunity			
Test	Test	UOM	Level & Criteria
IEC61000-4-2 (ESD)	Enclosure Port	Lvl	Level 4, Criteria A
	AC Port	Lvl	Level 4, Criteria A
	CH1 and Standby	Lvl	Level 3, Criteria A
	Signal I/O Port (Remote On/Off, AC_FAIL, DC_OK)	Lvl	Level 3, Criteria A
IEC61000-4-3 (Radiated Immunity)	80 MHz to 2.7 GHz	V/m	10 (Level 3, Criteria A)
	2.7 GHz to 6 GHz	V/m	10 (Level 3, Criteria A)
EN 60601-1-2:2015 (Radiated Immunity)	Immunity to RF Wireless Communications Equipment (Table 9)	-	All Criteria, Criteria A
CISPR 35	1.8 GHz to 5 GHz	V/m	3 (Table 1, condition 1.3 requirements, Criteria A)
IEC 61204-3: 2000	900 MHz (Keyed Carrier)	V/m	3 (Criteria A)
IEC61000-4-4  (Electrical Fast Transient Burst)	AC Port	kV	4 (Level 4, Criteria A)
	CH1	kV	2 (Level 4, Criteria A)
	Fan Out, Standby	kV	N/A
	Signal I/O Port (Remote On/Off, AC_FAIL, DC_OK)	kV	2 (Level 4, Criteria A)
IEC61000-4-5 (Surge)	(AC input common mode)	kV	2 (Level 3, Criteria A)
	(AC input normal mode)	kV	1 (Level 3, Criteria A)
IEC61000-4-6 (Conducted Susceptibility)	(AC input common mode)	V	10 (Level 3, Criteria A)
	(DC output common mode)	V	10 (Level 3, Criteria A)
	(Fan Out, Standby common mode)	V	N/A
	(Signal I/O common mode)	V	N/A
IEC61000-4-8 (Power Frequency Mag. Field)		A/m	(Level 4, Criteria A)
IEC61000-4-11 (Voltage dips / Interruption)	When exited factory (Bulk cap life degradation not considered)	-	Class 3
	0% for 0.5 cycle	Criteria	A
	0% for 1 cycle	Criteria	A ≤175W, B >175W
	40% for 10/12 cycles	Criteria	100Vac: A ≤50W, B >50W; 220Vac: A
	70% for 25/30 cycles	Criteria	100Vac: A ≤150W, B >150W; 220Vac: A
IEC60601-1-2 (Voltage dips / Interruption)	80% for 250/300 cycles	Criteria	100Vac: A ≤200W, B >200W; 220Vac: A
	0% for 250/300 cycles	Criteria	B
	When exited factory (Bulk cap life degradation not considered)	-	-
	0% for 0.5 cycle	Criteria	A
IEC61000-6-2 (Voltage dips / Interruption)	0% for 1 cycle	Criteria	A ≤175W, B >175W
	0% for 1 cycle	Criteria	A ≤175W, B >175W
	70% for 25/30 cycles	Criteria	100Vac: A ≤150W, B >150W; 220Vac: A
	70% for 25/30 cycles	Criteria	100Vac: A ≤150W, B >150W; 220Vac: A
IEC61204-3 (Voltage dips / Interruption)	0% for 250/300 cycles	Criteria	B
	0% for 1 cycle	Criteria	B
	40% for 10/12 cycles	Criteria	C
	70% for 25/30 cycles	Criteria	C
SEMI F47	0% for 250/300 cycles	Criteria	C
	30% for 10 ms	Criteria	B
	60% for 100 ms	Criteria	100Vac: A ≤70W, B >70W; 220Vac: A
IEC61000-4-12 (Ringwave Test)	95% for 5000 ms	Criteria	C
	50% for 0.2 s	Criteria	170Vac: A ≤240W, B >240W; 220Vac: A
	70% for 0.5 s	Criteria	A
	80% for 1s	Criteria	A
EN61000-4-14 (Voltage Fluctuations)		-	(Level 3, Criteria A)
		-	Class 3, Criteria A

Specifications		
Model		CUS250M
<b>Output</b>		
Switching Frequency	kHz	Variable frequency from 25 to 300 (excluding burst mode) for the PFC, DC-DC and flyback converters. Frequencies vary with input voltage, output voltage and output load.
Line Regulation	%	<0.5 (85 - 264Vac)
Load Regulation	%	<1 (0 - 100% load)
External Load Capacitance	µF	12V: 20,830, 15V: 16,660, 18V: 9,440, 24V: 2,290, 28V: 4,460, 36V: 3,470, 48V: 1,300 <1 of nominal output for operating temperatures above 0°C
Ripple & Noise	%	12V model: <2, other voltages: <1.5 at -20°C. <2 in burst mode when the load is <10% of the rated current External load capacitance will reduce the amplitude.
Temperature Coefficient	%/°C	±0.02
Minimum Load	-	No minimum load required
Overcurrent Protection	%	110 to 170. Hiccup mode, automatic recovery
Overvoltage Protection	-	115-140% of standard output voltage Latching (unit shutdown), cycle AC input or use remote on/off to reset
Overtemperature Protection	-	Latching, cycle AC or use remote on/off to reset
Remote Sense	-	None
Remote On/Off	-	Opto-isolated. Inhibit: High = OFF, Low = ON, Enable: High = ON, Low = OFF
Standby Voltage	-	5V 0.1A
Fan Supply	-	11.4V 0.5A
Parallel Operation	-	Not possible
Series Operation	-	Please contact Technical Sales for guidance
<b>Environmental</b>		
Operating Temperature (-40°C start-up)	°C	-20 to +85 with system forced air cooling (70 maximum for fan version /F), see derating curves below
Storage Temperature	°C	-40 to +85 (70 maximum for fan version /F)
Operating Humidity (non condensing)	%RH	5 - 95 (15 - 90 for /F fan version)
Pollution Degree	-	PD2 Material group IIIb
Cooling	-	Convection, conduction or forced air cooling. See derating curves below
Altitude	m	5,000
Withstand Voltage (For 1 minute)	Vac	Input to Ground 1,500 (1xMOPP), Input to Output 4,000 (2xMOPP), Output to Ground 1,500 (1xMOPP)
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500VDC
Vibration (non operating)	-	2G, 10-500Hz for 1 hour
Shock (non operating)	-	30G, 11ms half sine
<b>Other</b>		
Weight	g	Open frame: 275, /A: 320, /C: 275, /F: 345, /U: 305
Size (WxLxH)	mm	Open frame : 50.8 x 101.6 x 39.5
		U channel : 64 x 119.2 x 39.5
		Cover (/A) : 64 x 119.2 x 43
		Fan (/F) : 64 x 119.2 x 60.6
Size (WxLxH)	Inches	Open frame: 2 x 4 x 1.56
		U channel : 2.52 x 4.69 x 1.56
		Cover (/A) : 2.52 x 4.69 x 1.69
		Fan (/F) : 2.52 x 4.69 x 2.39
Connectors	-	Input: JST B2P3-VH, Output: M3 screw, Fan: Molex 22-05-7025, Signals: Molex 87833-0833
Warranty	yrs	5

## Peak Power Rating Curves

U chassis configuration, convection cooled on metal baseplate

50°C, 10% Duty Cycle

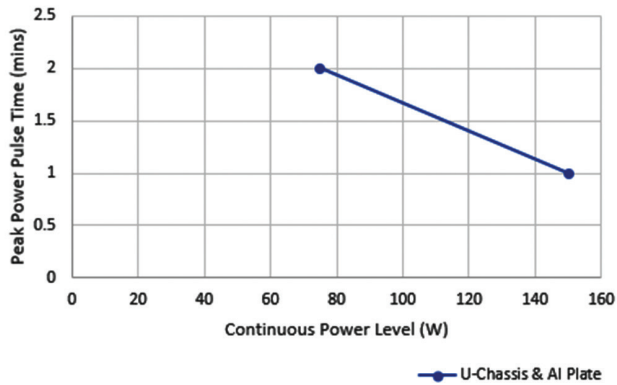


Examples:  
 150W continuous - 250W peak - 1 min pulse time - 10% duty cycle  
 75W continuous - 250W peak - 2 mins pulse time - 10% duty cycle

## Peak Power Rating Curves

Open frame configuration, convection cooled (no metal baseplate)

25°C, 10% Duty Cycle

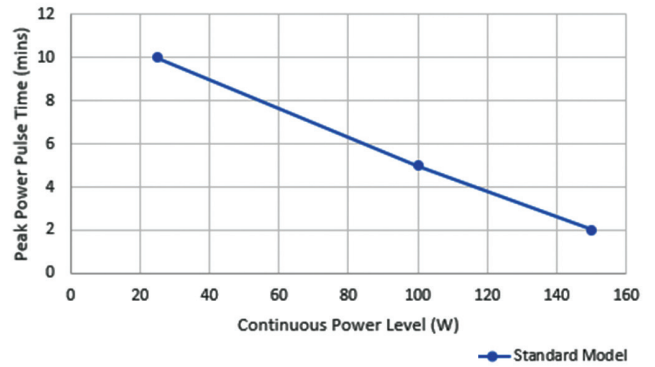


Examples:  
 150W continuous - 250W peak - 2 mins pulse time - 10% duty cycle  
 100W continuous - 250W peak - 5 mins pulse time - 10% duty cycle  
 25W continuous - 250W peak - 10 mins pulse time - 10% duty cycle

## Orientation

### Horizontal Orientation A




### Vertical Orientation B



Notes:  
 See website for detailed specifications, test methods and installation manual.  
 Specification parameters apply at 25°C ambient temperature unless otherwise stated.


## Output Power vs Ambient Temperature

### Conduction/convection cooled CUS250M-12

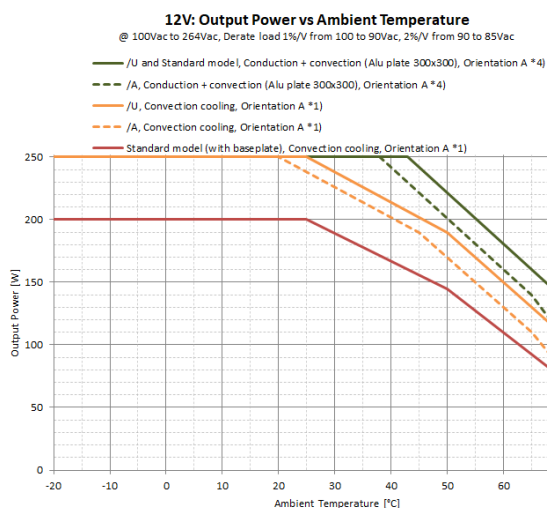


## Output Power vs Ambient Temperature


### Conduction/convection cooled CUS250M-24

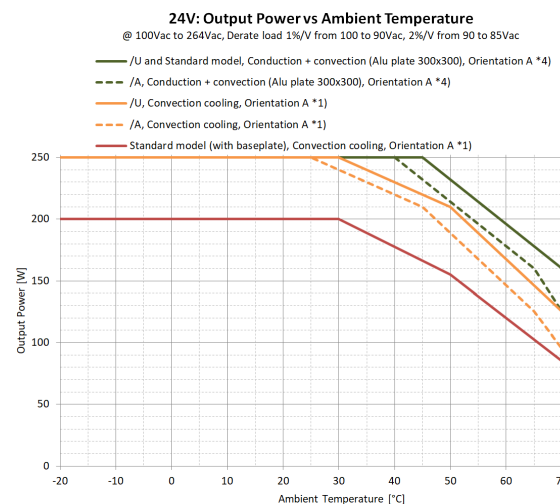

**Output Power vs Ambient Temperature (forced air cooled) all CUS250M voltages**

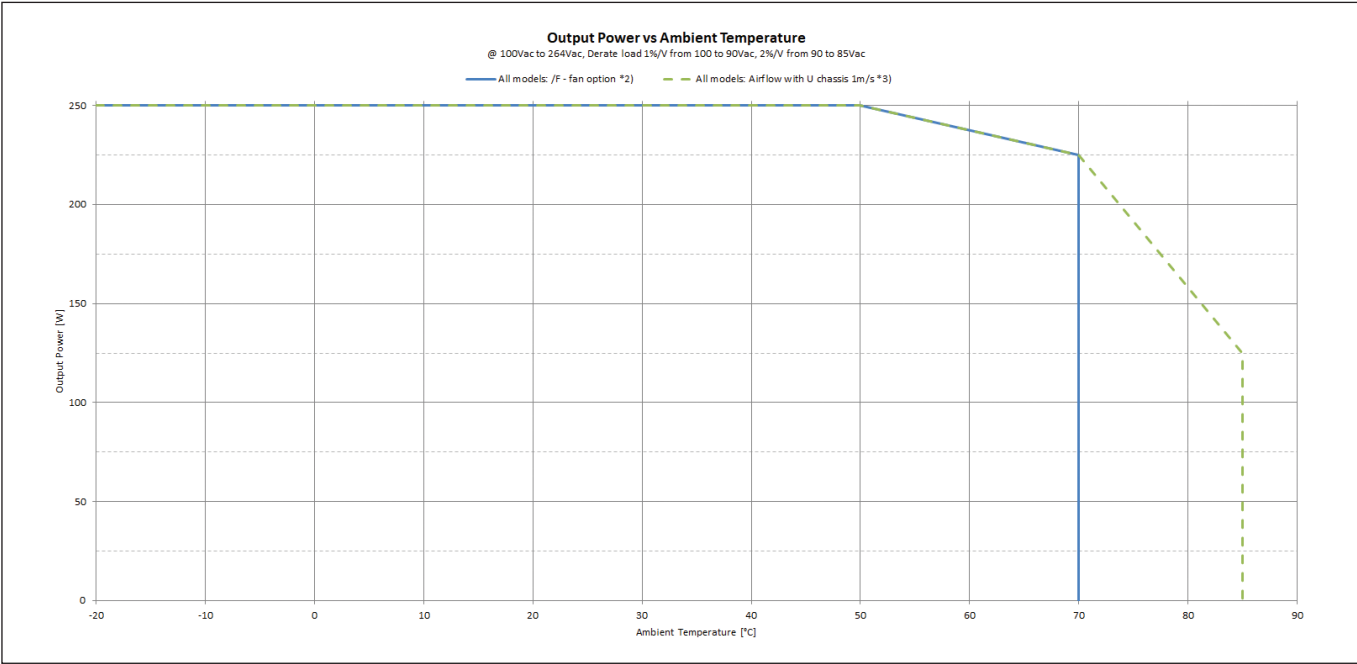


**Standby and Fan Output Power vs Ambient Temperature**

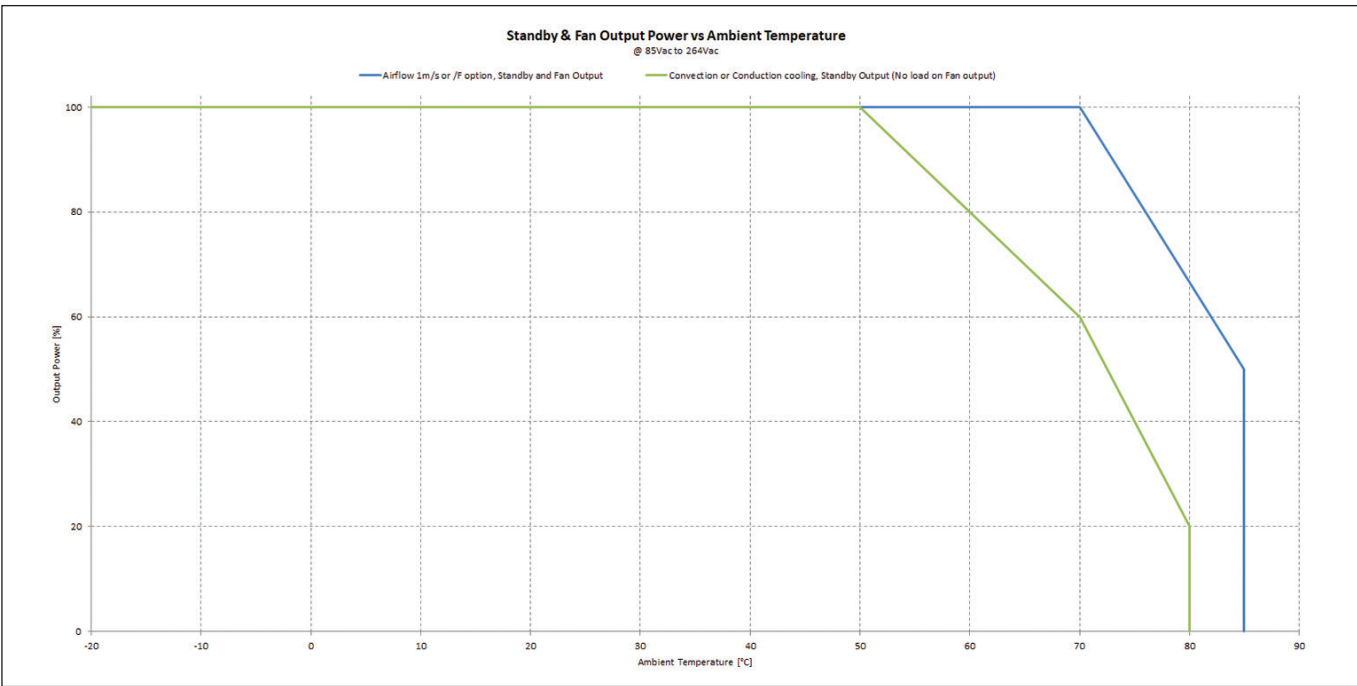


**Notes**

- 1: Orientation A (see Application Note), 50mm above surface.  
Standby output is loaded (see derating curves for Standby output), no load on Fan output
- 2: 50mm above surface. Limited by fan specification to 70°C maximum
- 3: Tested with U chassis with airflow direction 1 (see Application Note).  
Customer to ensure airflow rate and direction to keep components temperature below the limits.  
Standby and Fan output load according to derating curves.  
Measured in wind tunnel with 5mm space on side of U chassis.
- 4: Mounted on natural aluminium plate, 300x300x1mm lifted 50mm above other surfaces  
Orientation A (see Application Note)  
Standby output is loaded (see derating curves for Standby output), no load on Fan output


## Outline Drawing CUS250M Open Frame Unit (Integral baseplate)

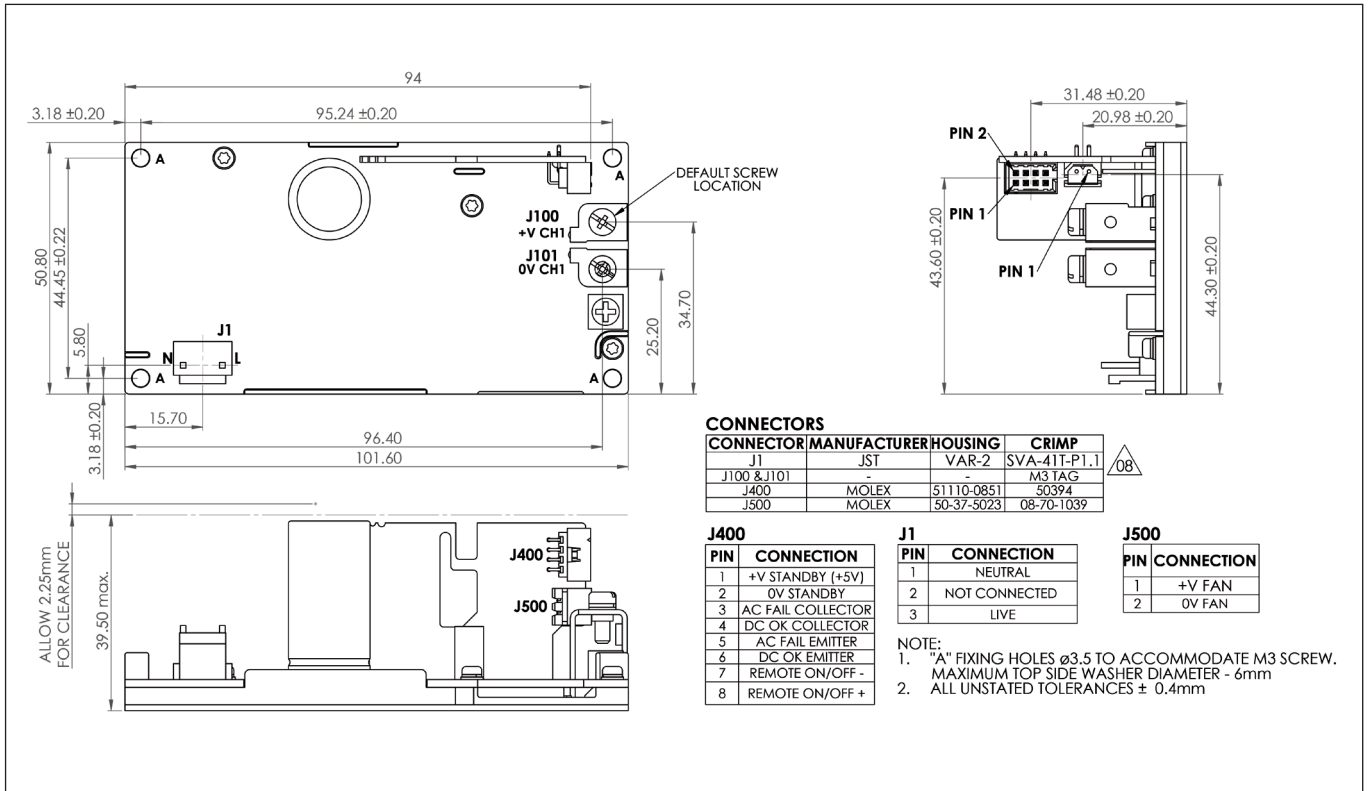


## Outline Drawing CUS250M/C Open Frame Unit with inserts (Integral baseplate)

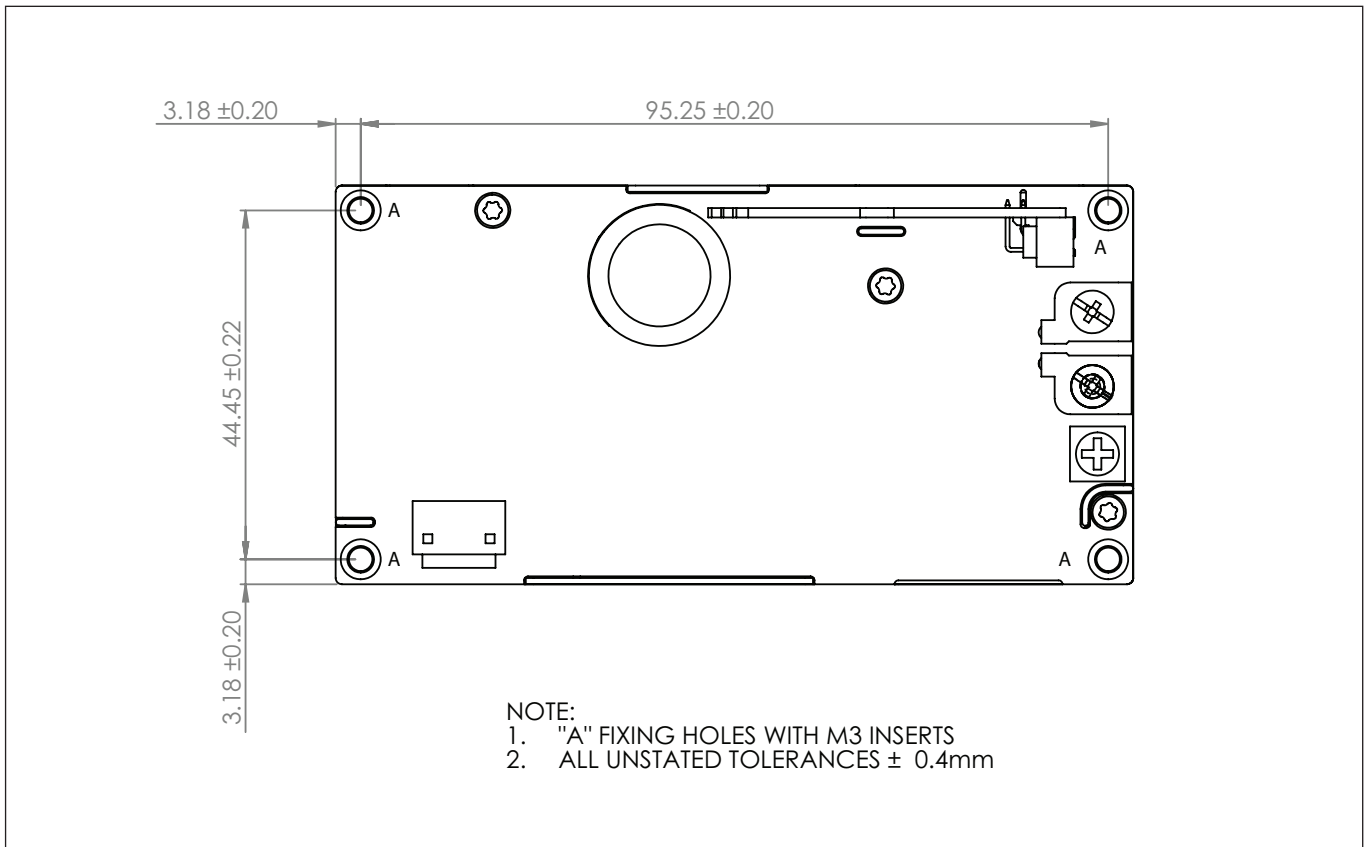

**Outline Drawing CUS250M/U (U Channel) Option**

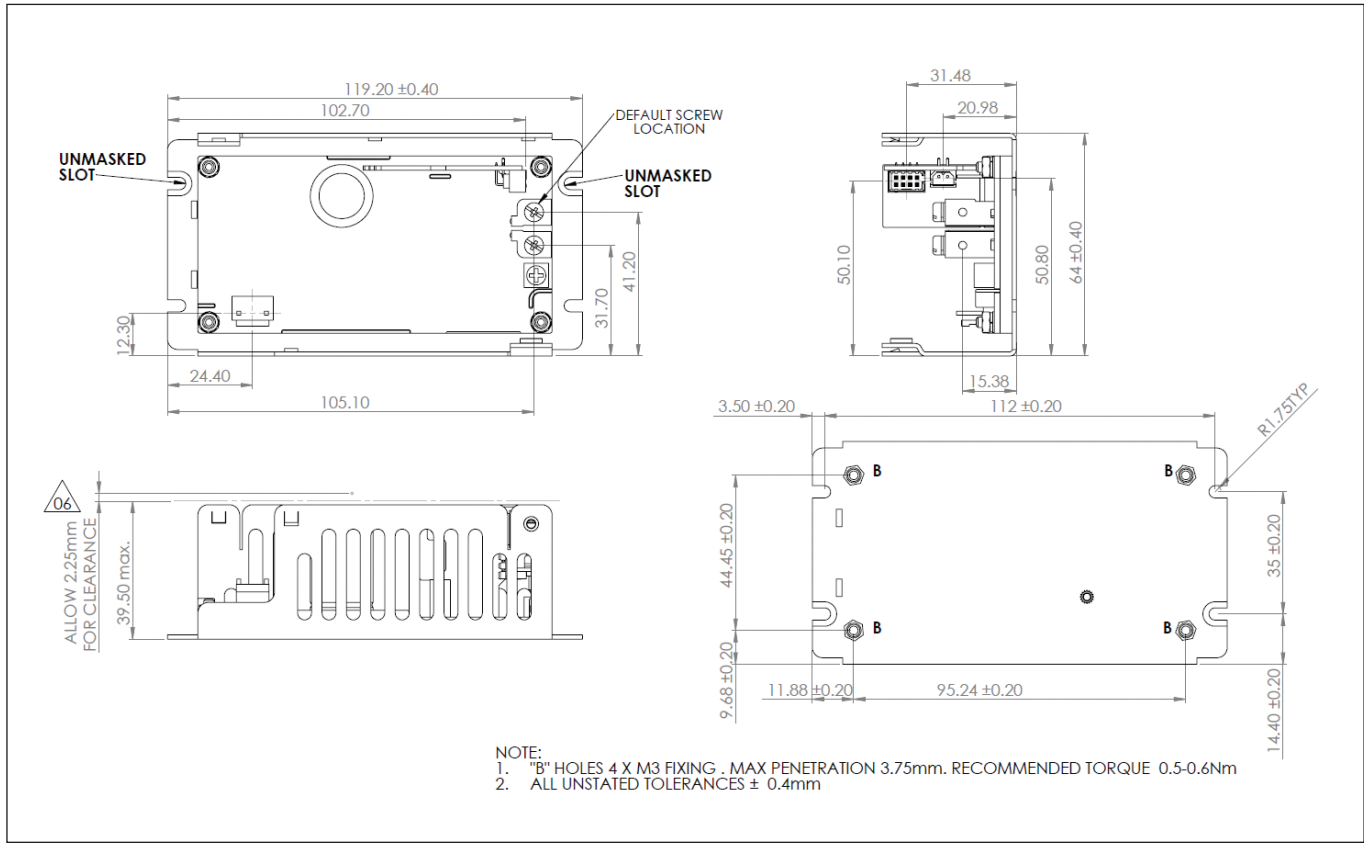


**Outline Drawing CUS250M/A (U Channel with Cover) Option**

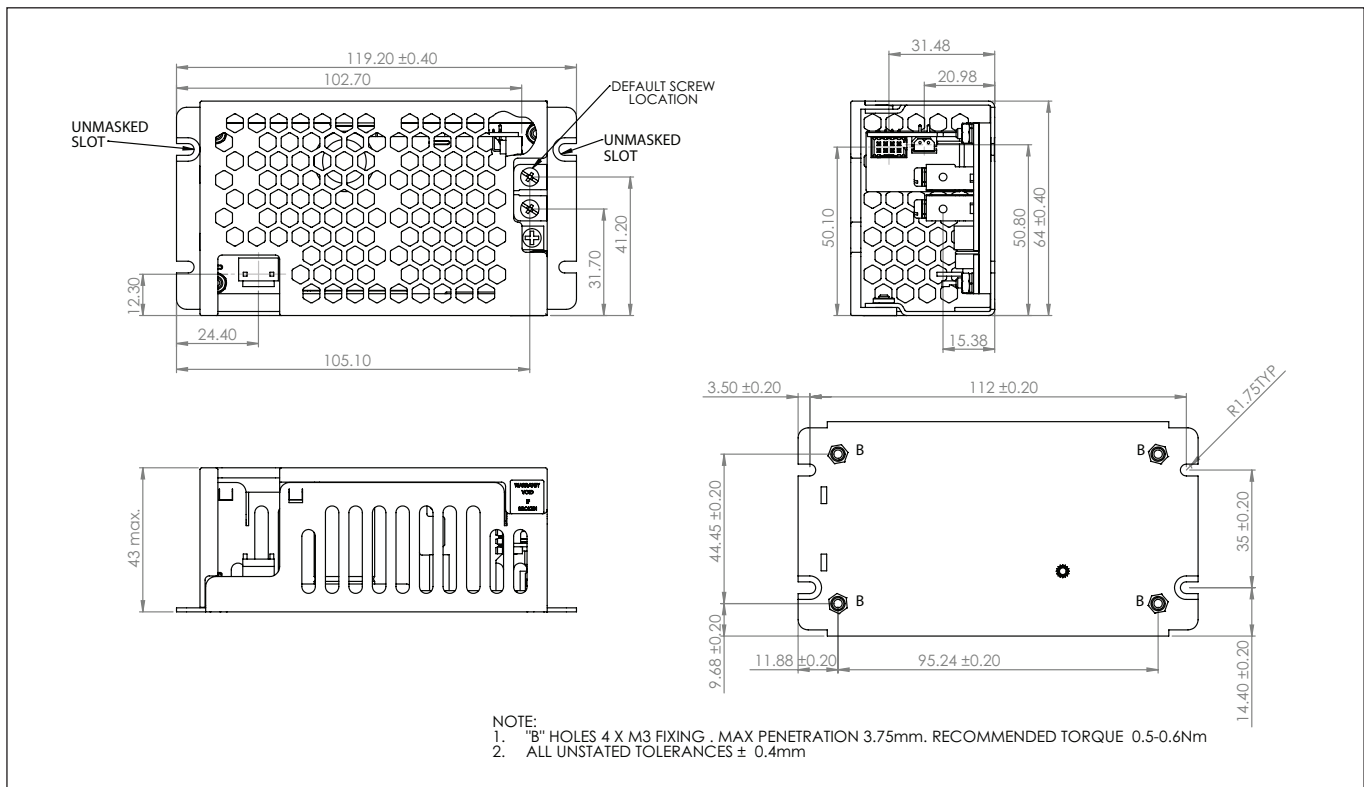



**Outline Drawing CUS250M/F (U Channel with Cover & Top Mounted Fan) Option**

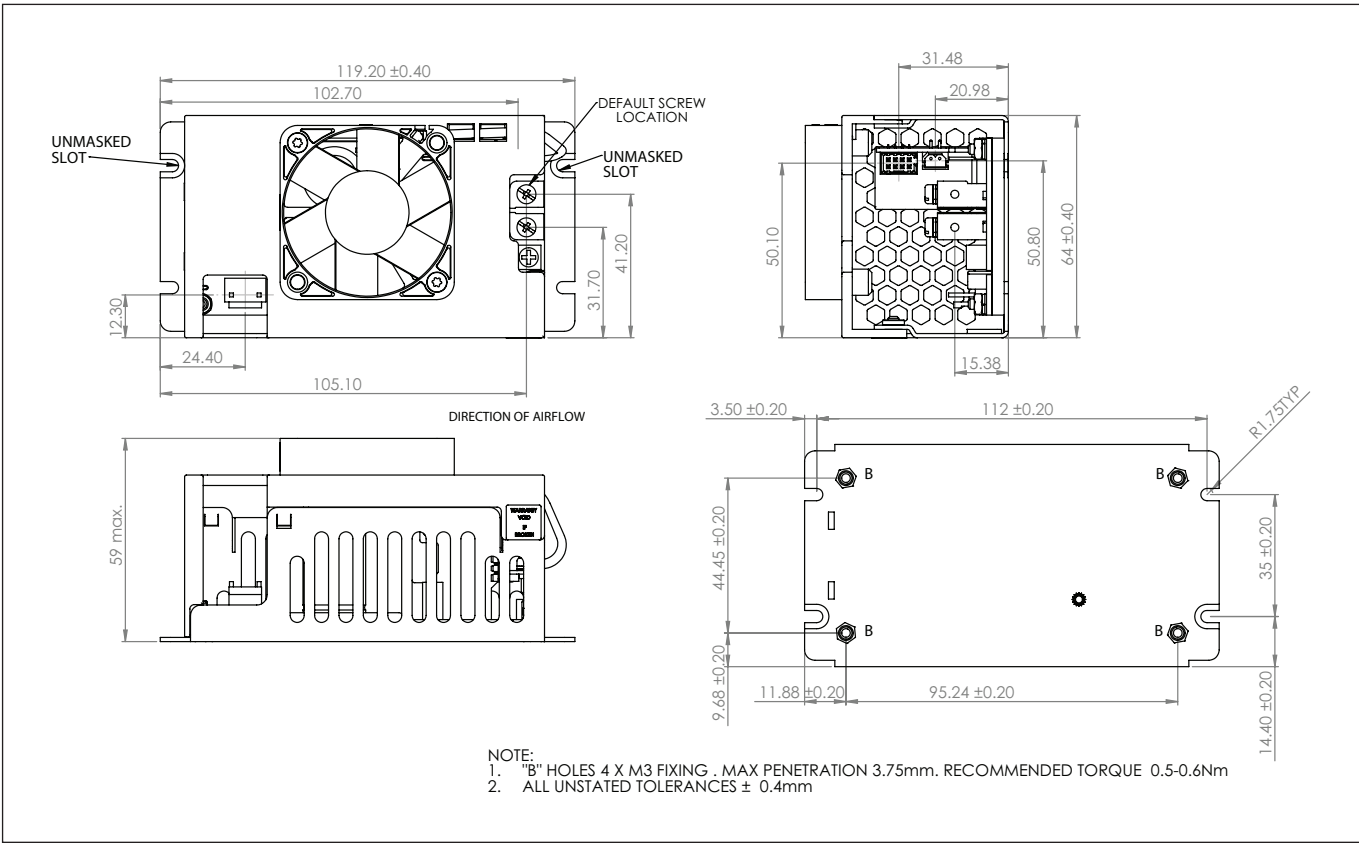



**TDK-Lambda France SAS**

Tel: +33 1 60 12 71 65  
 ttf.fr.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/fr



**Italy Sales Office**

Tel: +39 02 61 29 38 63  
 ttf.it.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/it



**Netherlands**

ttf.nl.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/nl



**TDK-Lambda Germany GmbH**

Tel: +49 7841 666 0  
 tlg.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/de



**Austria Sales Office**

Tel: +43 2256 655 84  
 tlg.at.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/at



**Switzerland Sales Office**

Tel: +41 44 850 53 53  
 tlg.ch.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/ch



**Nordic Sales Office**

Tel: +45 8853 8086  
 tlg.dk.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/dk



**TDK-Lambda UK Ltd.**

Tel: +44 (0) 12 71 85 66 66  
 tlu.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/uk



**TDK-Lambda Ltd.**

Tel: +9 723 902 4333  
 tti.powersolutions@tdk.com  
 www.emea.lambda.tdk.com/il-en



**TDK-Lambda Americas**

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
 tia.powersolutions@tdk.com  
 www.us.lambda.tdk.com



**TDK Electronics do Brasil Ltda**

Tel: +55 11 3289-9599  
 sales.br@tdk-electronics.tdk.com  
 www.tdk-electronics.tdk.com/en



**TDK-Lambda Corporation**

Tel: +81-3-6778-1113  
 www.jp.lambda.tdk.com



**TDK-Lambda (China) Electronics Co. Ltd.**

Tel: +86 21 6485-0777  
 tlc.powersolutions@tdk.com  
 www.lambda.tdk.com.cn



**TDK-Lambda Singapore Pte Ltd.**

Tel: +65 6251 7211  
 tis.marketing@tdk.com  
 www.sg.lambda.tdk.com



**TDK India Private Limited, Power Supply Division**

Tel: +91 80 4039-0660  
 mathew.philip@tdk.com  
 www.sg.lambda.tdk.com

