
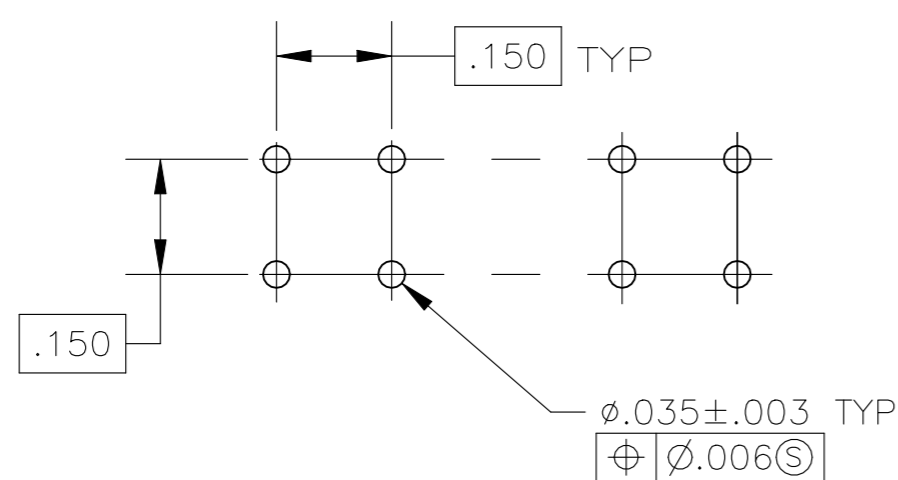


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
P	P	PLASTIC MATERIAL SUPPLIER CHANGE FOR HOUSING	27MAY2021	SB	KJK

- 1 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 3 PARTS PACKAGED IN TRAYS.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

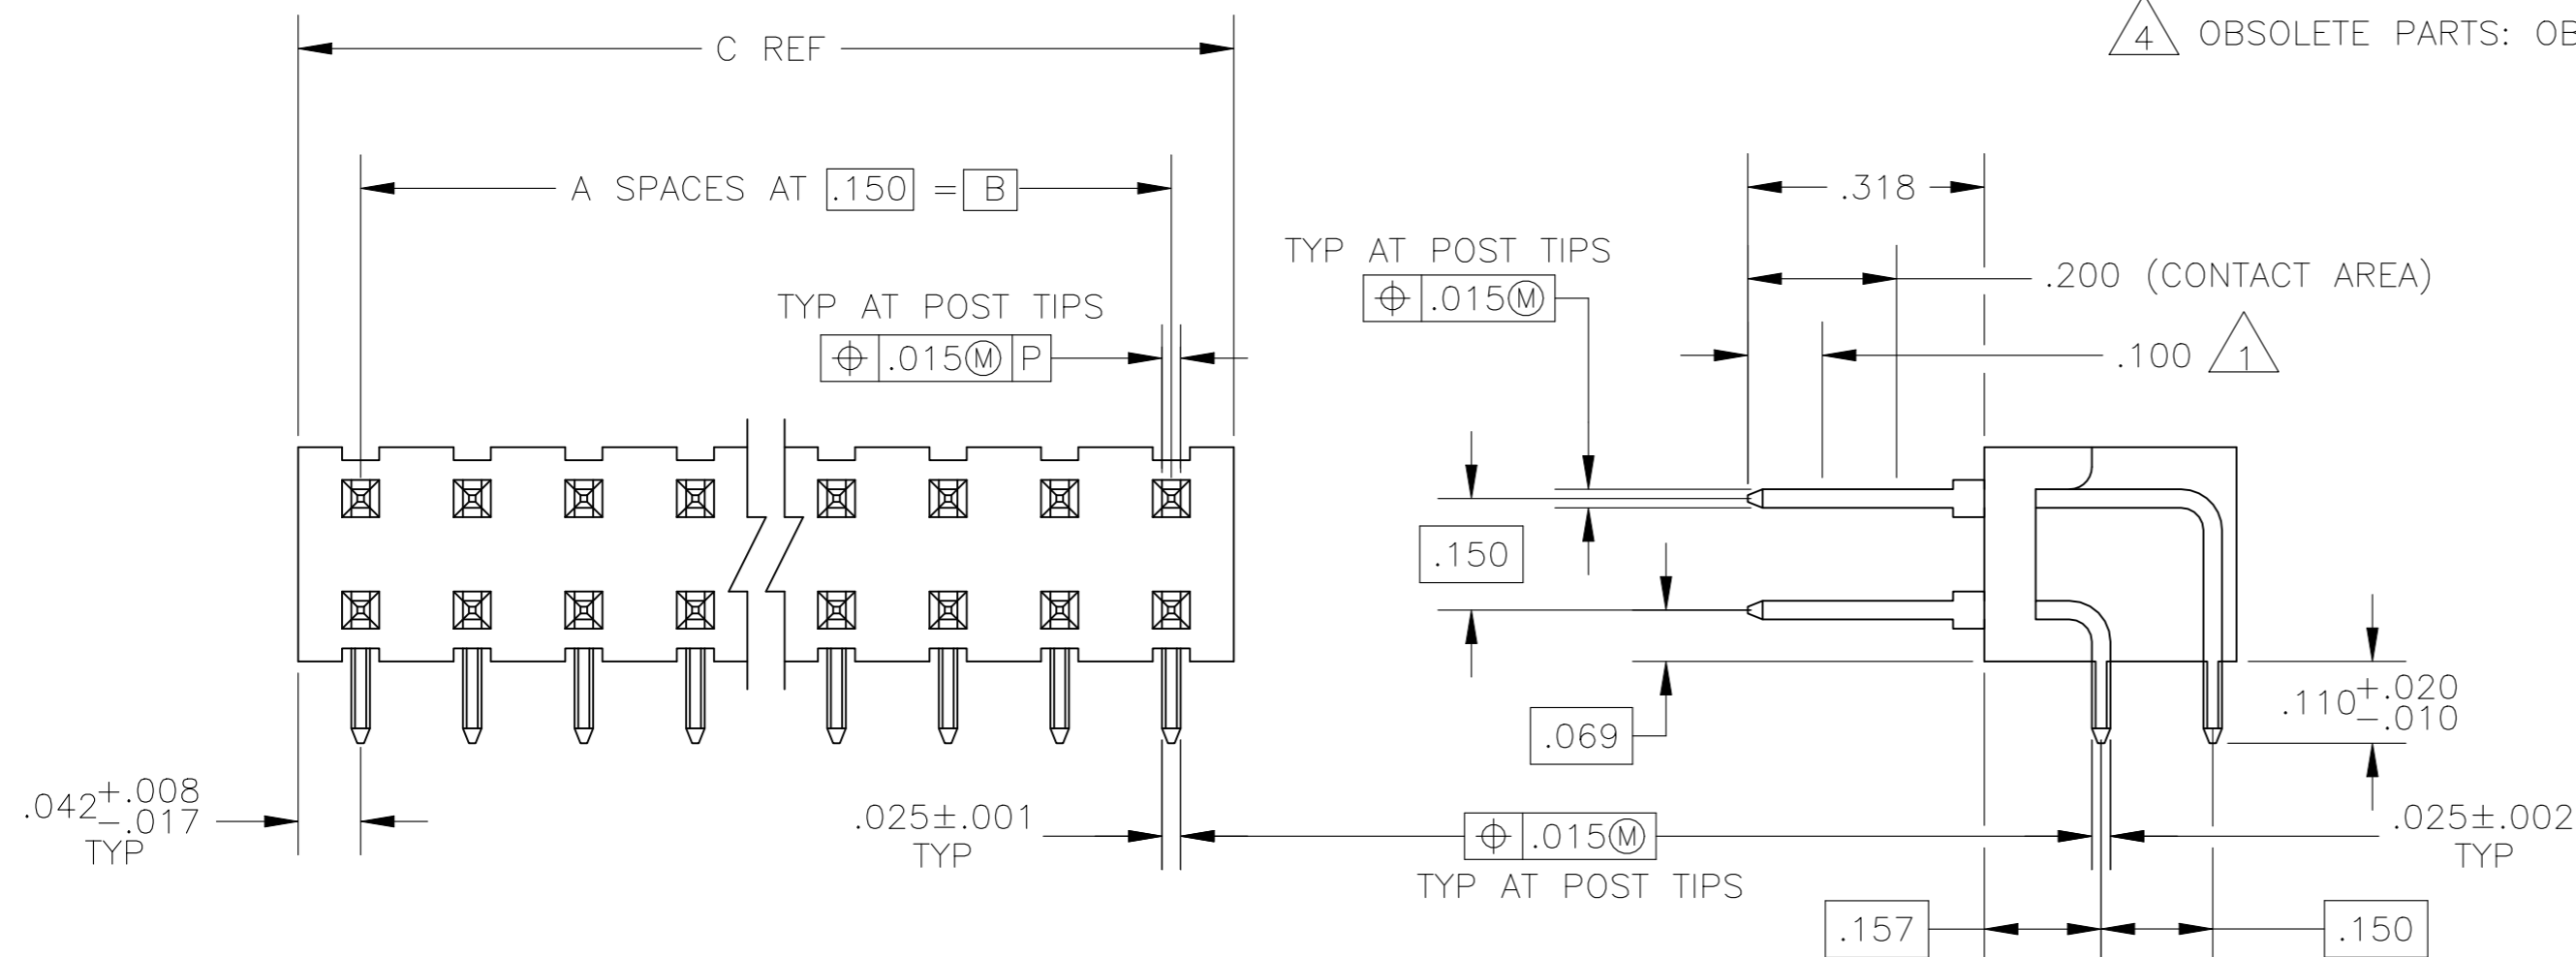

RECOMMENDED HOLE LAYOUT FOR MANUAL INSERTION

	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	
3	OBSOLETE	1.584	1.500	10	22	-2- 87229 -7
		3.834	3.750	25	52	2- 87229 -6
	OBSOLETE	3.684	3.600	24	50	-2- -5-
	OBSOLETE	3.534	3.450	23	48	-2- -4-
	OBSOLETE	3.384	3.300	22	46	-2- -3-
	OBSOLETE	3.234	3.150	21	44	-2- -2-
	OBSOLETE	3.084	3.000	20	42	-2- -1-
	OBSOLETE	2.934	2.850	19	40	-2- -0-
	OBSOLETE	2.784	2.700	18	38	-1- -9-
	OBSOLETE	2.634	2.550	17	36	-1- -8-
	OBSOLETE	2.484	2.400	16	34	-1- -7-
	OBSOLETE	2.334	2.250	15	32	-1- -6-
4	OBSOLETE	2.184	2.100	14	30	-1- -5-
	OBSOLETE	2.034	1.950	13	28	-1- -4-
	OBSOLETE	1.884	1.800	12	26	-1- -3-
		1.734	1.650	11	24	1- -2-
	OBSOLETE	1.584	1.500	10	22	-1- -1-
4	OBSOLETE	1.434	1.350	9	20	-1- -0-
	OBSOLETE	1.284	1.200	8	18	- - -9-
	OBSOLETE	1.134	1.050	7	16	- - -8-
	OBSOLETE	.984	.900	6	14	- - -7-
	OBSOLETE	.834	.750	5	12	- - -6-
4	OBSOLETE	.684	.600	4	10	- - -5-
	OBSOLETE	.534	.450	3	8	- - -4-
		.384	.300	2	6	- - -3-
	OBSOLETE	.234	.150	1	4	- - -2-
	OBSOLETE	.084	-	-	2	- - -87229 -1-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. RINGLEY 8-5-85	<b>TE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK T J ZOLA 8-5-85		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T J ZOLA 8-5-85	NAME ASSEMBLY, MOD II, HEADER, DOUBLE ROW, .150 X .150 CL, RIGHT ANGLE, W/.025 SQ POSTS	
0 PLC ± -		PRODUCT SPEC	SIZE A2 CAGE CODE 00779 DRAWING NO C=87229 RESTRICTED TO	
1 PLC ± -		APPLICATION SPEC	SCALE 4:1 SHEET 1 OF 1 REV P	
2 PLC ± -		WEIGHT -		
3 PLC ± .005		CUSTOMER DRAWING		
4 PLC ± -				
ANGLES ± -				
MATERIAL HOUSING-FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK POSTS-PHOS. BRONZE		FINISH .00030 GOLD ON CONTACT AREA, GOLD FLASH ON SOLDER AREA, ALL OVER .00050 NICKEL		