


NOTES:

1. ALL PARTS ARE BULK PACKED.
2. CONTACTS SHIPPED UNASSEMBLED
3. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASSEMBLY P/N	CONTACT QTY.		CABLE O.D. RANGE
	#16	#20	
W8C80-6SG-P-513	2	4	.13-.15 [3.3-3.8]
W8C80-6SG-P-516			.16-.18 [4.1-4.6]
W8C80-6SG-P-519			.19-.21 [4.8-5.3]
W8C80-6SG-P-522			.22-.25 [5.6-6.3]
W8C80-6SG-P-526			.25-.27 [6.4-6.9]
W8C80-6SG-P-528			.26-.285 [6.6-7.2]

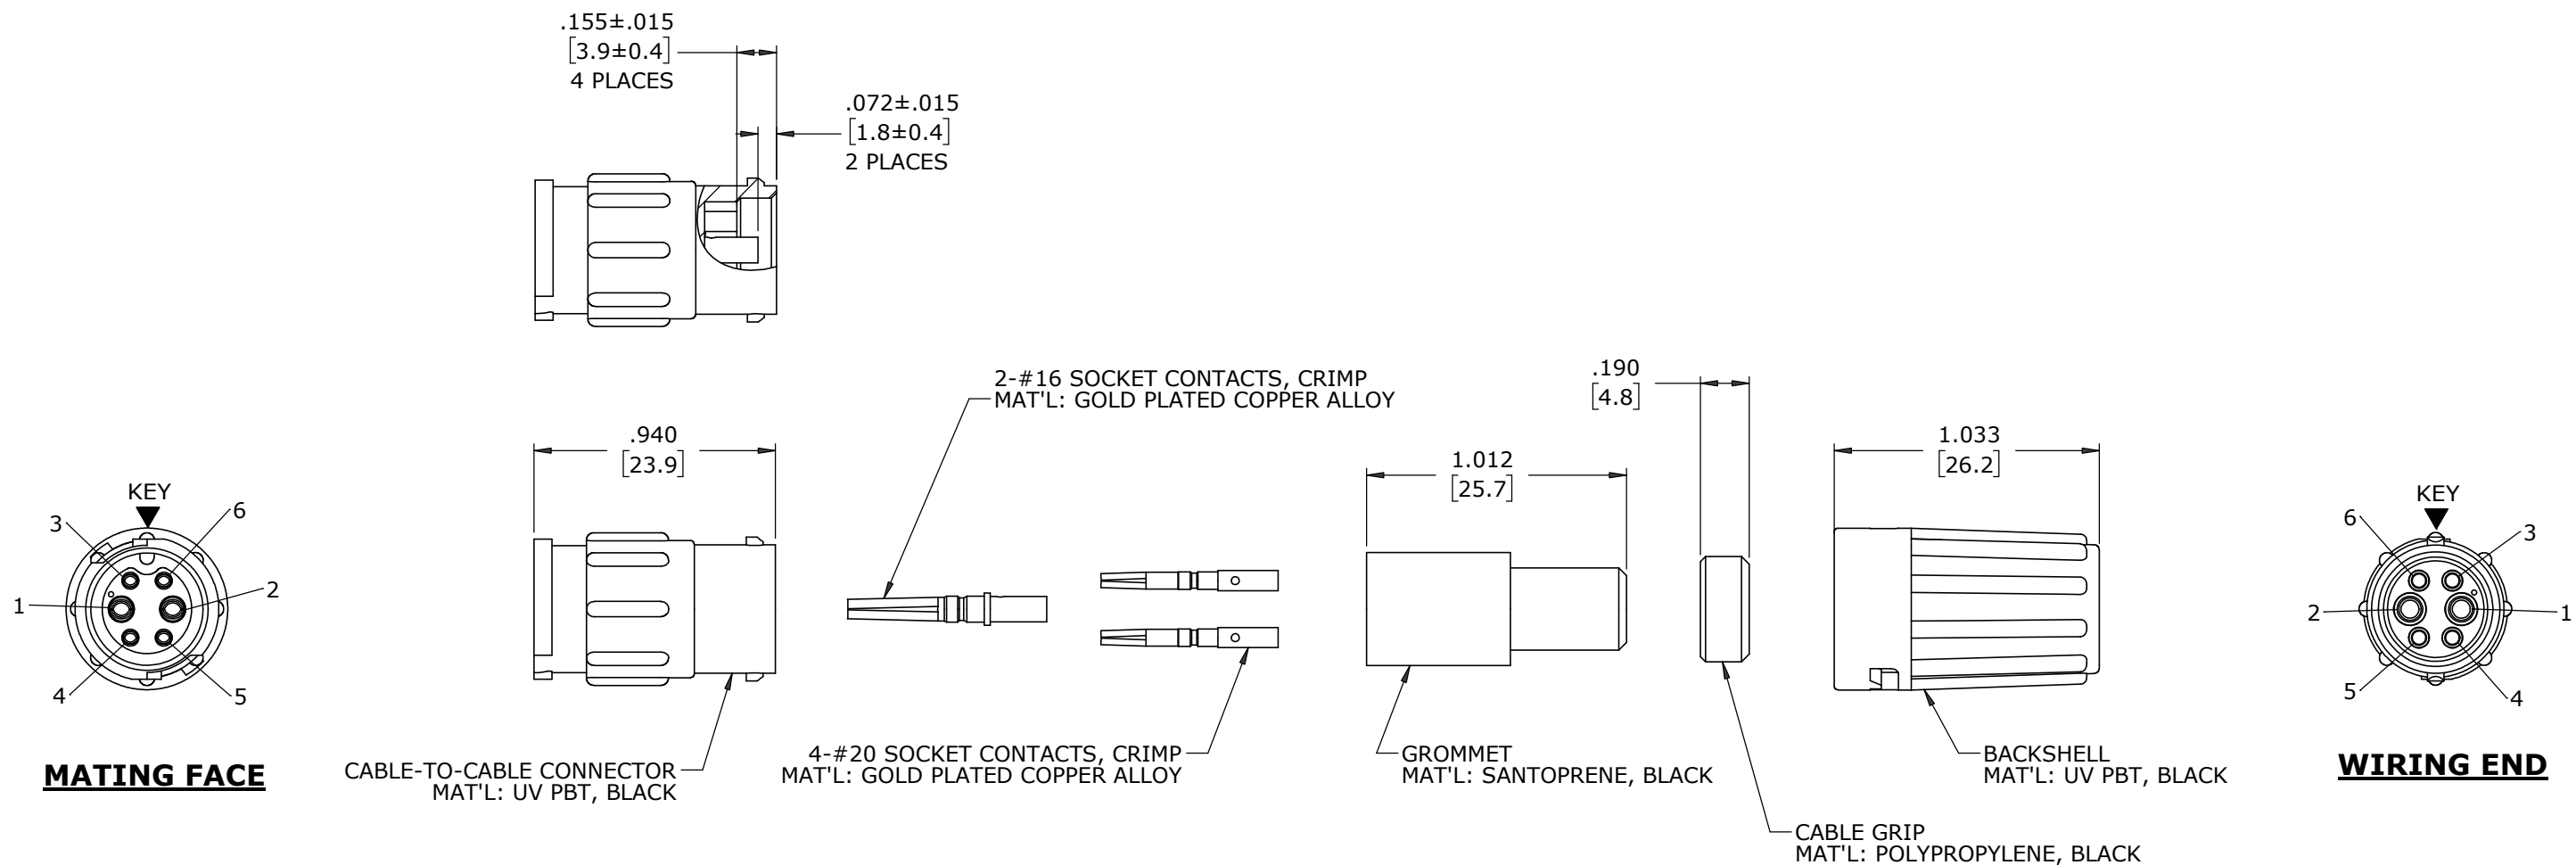

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
 DATE: _____

MA	07-20-20	RELEASED PER PDR 16014-10
PNK	01-18-18	PDR16014
REV. INIT.	DATE	DESCRIPTION
PNK	01-18-18	ORIG. DRAWN BY: DATE: 01-18-18
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.		<p>601 E. WILDWOOD VILLA PARK, IL 60181</p>
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS. UNLESS OTHERWISE SPECIFIED TOLERANCES: 3 PLACE DECIMALS ±.010 ANGLES 90° FRACTIONS ±1/16 - CRITICAL CHARACTERISTIC FLAG PER SPEC. XXXX		
APPROVED BY:	SCALE: NTS	TITLE: CABLE-TO-CABLE ASSEMBLY 2-16 + 4-20 SOCKET CONTACTS, CRIMP INSTA-CLICK™ MINI-CON-X POWER/SIGNAL CUSTOMER: STANDARD PRODUCT
FILE: W8C80-6SG-P-5XX	SIZE: B	SHEET: 1 OF 1
DIRECTORY: SLW	PART NUMBER: W8C80-6SG-P-5XX	REV: A

RoHS COMPLIANT