


# Steward

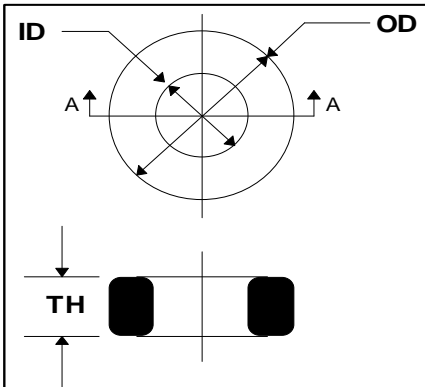

CORE DIMENSIONS					
UNCOATED CORE					35T0135-100
	MM	INCHES		MM	INCHES
OD	3.43	(.135)	±	.13	(.005)
ID	1.78	(.070)	±	.13	(.005)
TH	2.06	(.081)	±	.13	(.005)
SINGLE PARYLENE COATING					35T0135-10P
OD	3.45	(.136)	±	.13	(.005)
ID	1.75	(.069)	±	.13	(.005)
TH	2.08	(.082)	±	.13	(.005)

WEIGHT / K 0.15 LBS  
 INITIAL PERMEABILITY 5000

ELECTRICAL SPECIFICATION								
	MIN		NOM	MAX		FREQ.	VOLT.	
	(μH)	MIN TOL.	(μH)	(μH)	MAX TOL.	(kHz)	(V)	URNS
L	1.081	(-20%)	1.351	1.622	(+20%)	100	≤.00036	1
Q	10	-	-	-	-	100	≤.00036	1

COATING SPECIFICATIONS				
	TYPE	Max. Coating (mils.)	Min. DLB VAC	TEST FORCE (LB)
	PARYLENE	0.5	1000	.10

NOTES:



Rev	Description	Date	INT
A	Original Draft	6/7/1994	JAZ
B	REVISED DLB ELECT SPEC	6/10/1994	JAZ
C	UPDATED TO NEW FORMAT	6/9/1995	JBE
D	TRANSFER TO LOTUS NOTES	11/17/1997	IS
E	REACTIVATE PRINT REMOVE Q SPECS CHANGE P/N	10/4/2005	JRK
F	Revised Template	6/1/2006	WMM

Date: 6/1/2006	DWG # 35T0135-10P-F	Rev:
Drawn By: WMM	Title # 35T0135-10P	F

Steward This document contains information which is proprietary to Steward. No production or publication of this document in whole or in part shall be made without written authorization from Steward.

**UNCONTROLLED DOCUMENT**