

1

2

3

4

5

6

7

A

NOTES:

Plunger: Brass, 20µ" MIN Au over, 50µ" MIN Ni over

Barrel : Brass, 3µ" ,MIN Au over, 50µ" MIN Ni over

Spring : Stainless Steel

Mechanical Characteristics:

Spring Force : 60g ± 20% at Working Length

Mechanical Life : 1,000,000 cycle

Electrical Characteristics:

Current Rating : 2A

Contact Resistance : 20 mΩ Max

Operating Temperature range : -55~125° C

Packing: PE Bag

B

C

D

E

F

G

H

A

B

C


D

E

F

G

H

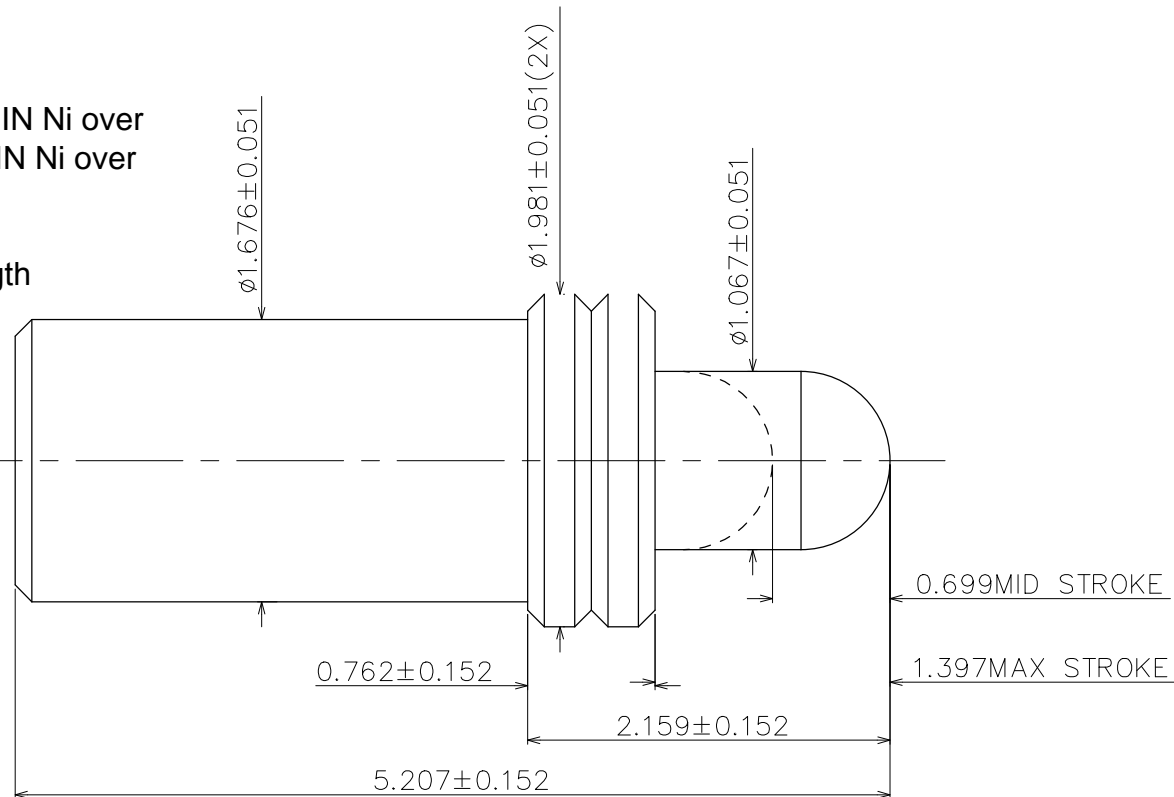

RoHS compliant  
Unit: mm

Scale	Free					Date	Name	Customer-No.	
TOLERANCE						Drawn	28.03.2018	Tom	
X.X	±0.20					Approved	28.03.2018	Winnie	
X.XX	±0.10							ASSMANN WSW-No. A-CSL-S-020-B7-A	
X.XXX	±0.08							Drawing-No.	
DIM	TOL							ASS 7895 CO	rev00
Angle	±3°	ⓐ	Drawn	28.03.2018	Tom			Replace	Sheet
Angle	TOL	Id.	Modification	Date	Name				

1

2

3

4

5

6

7