

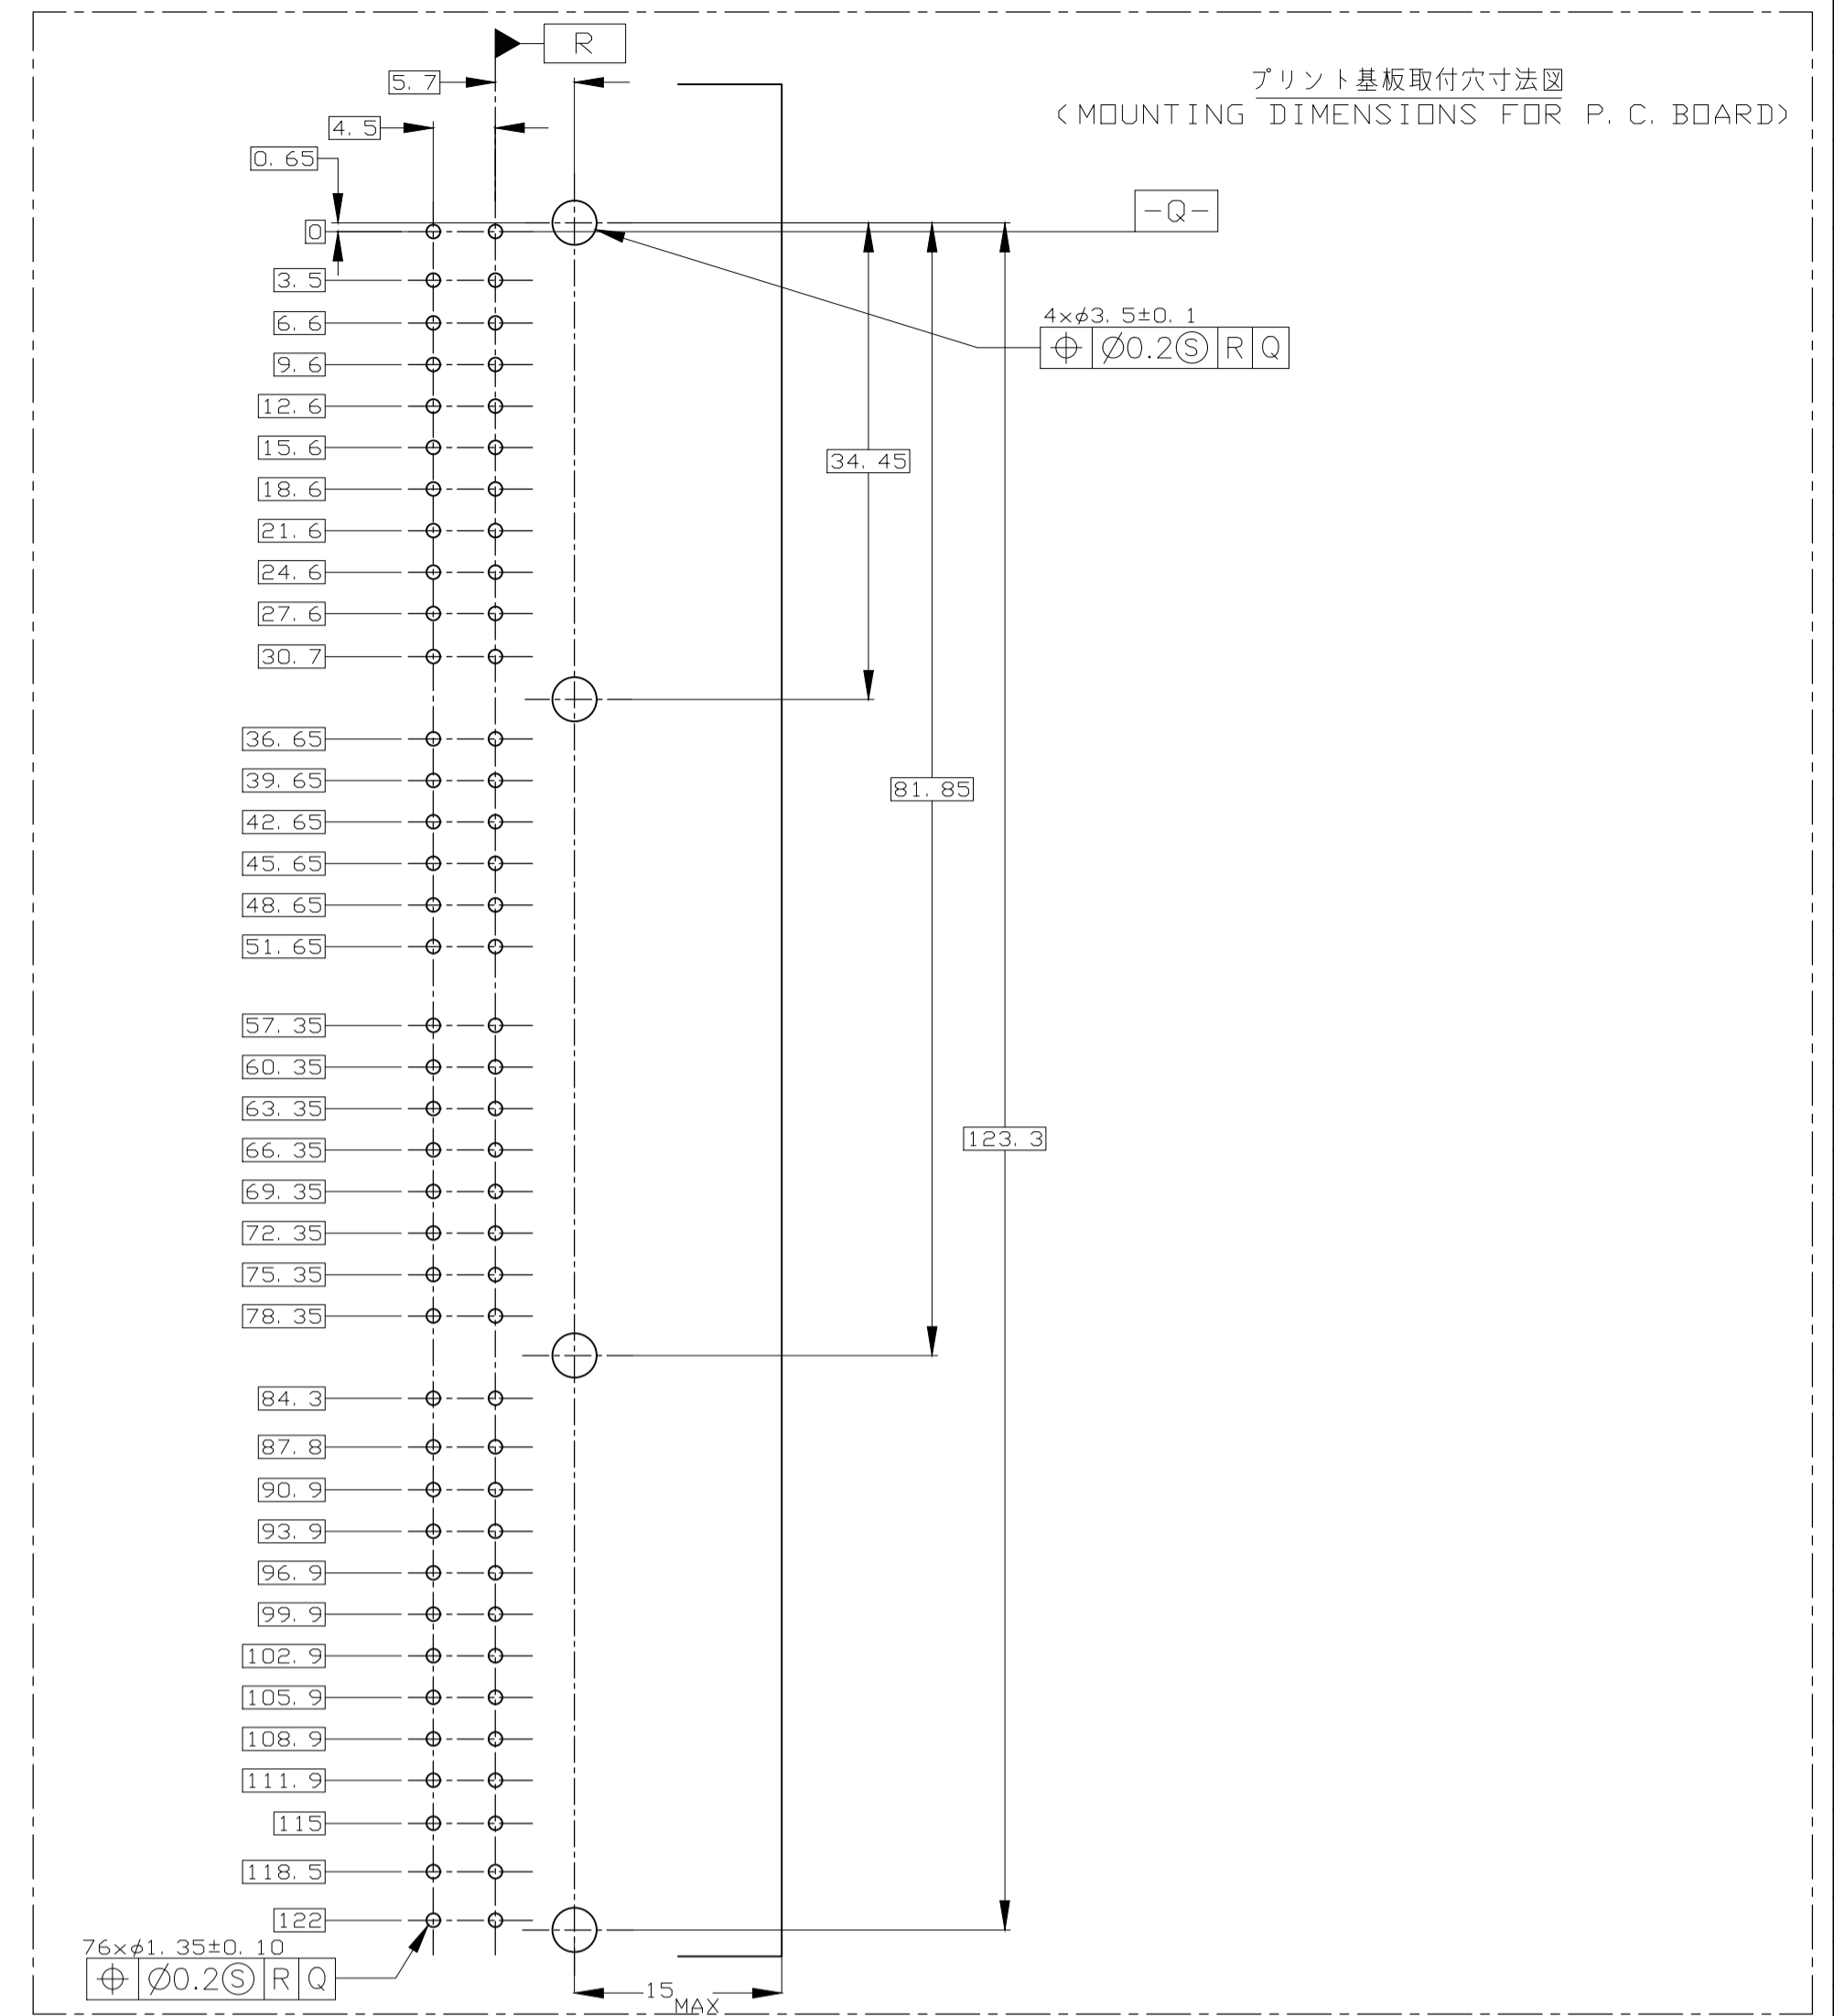
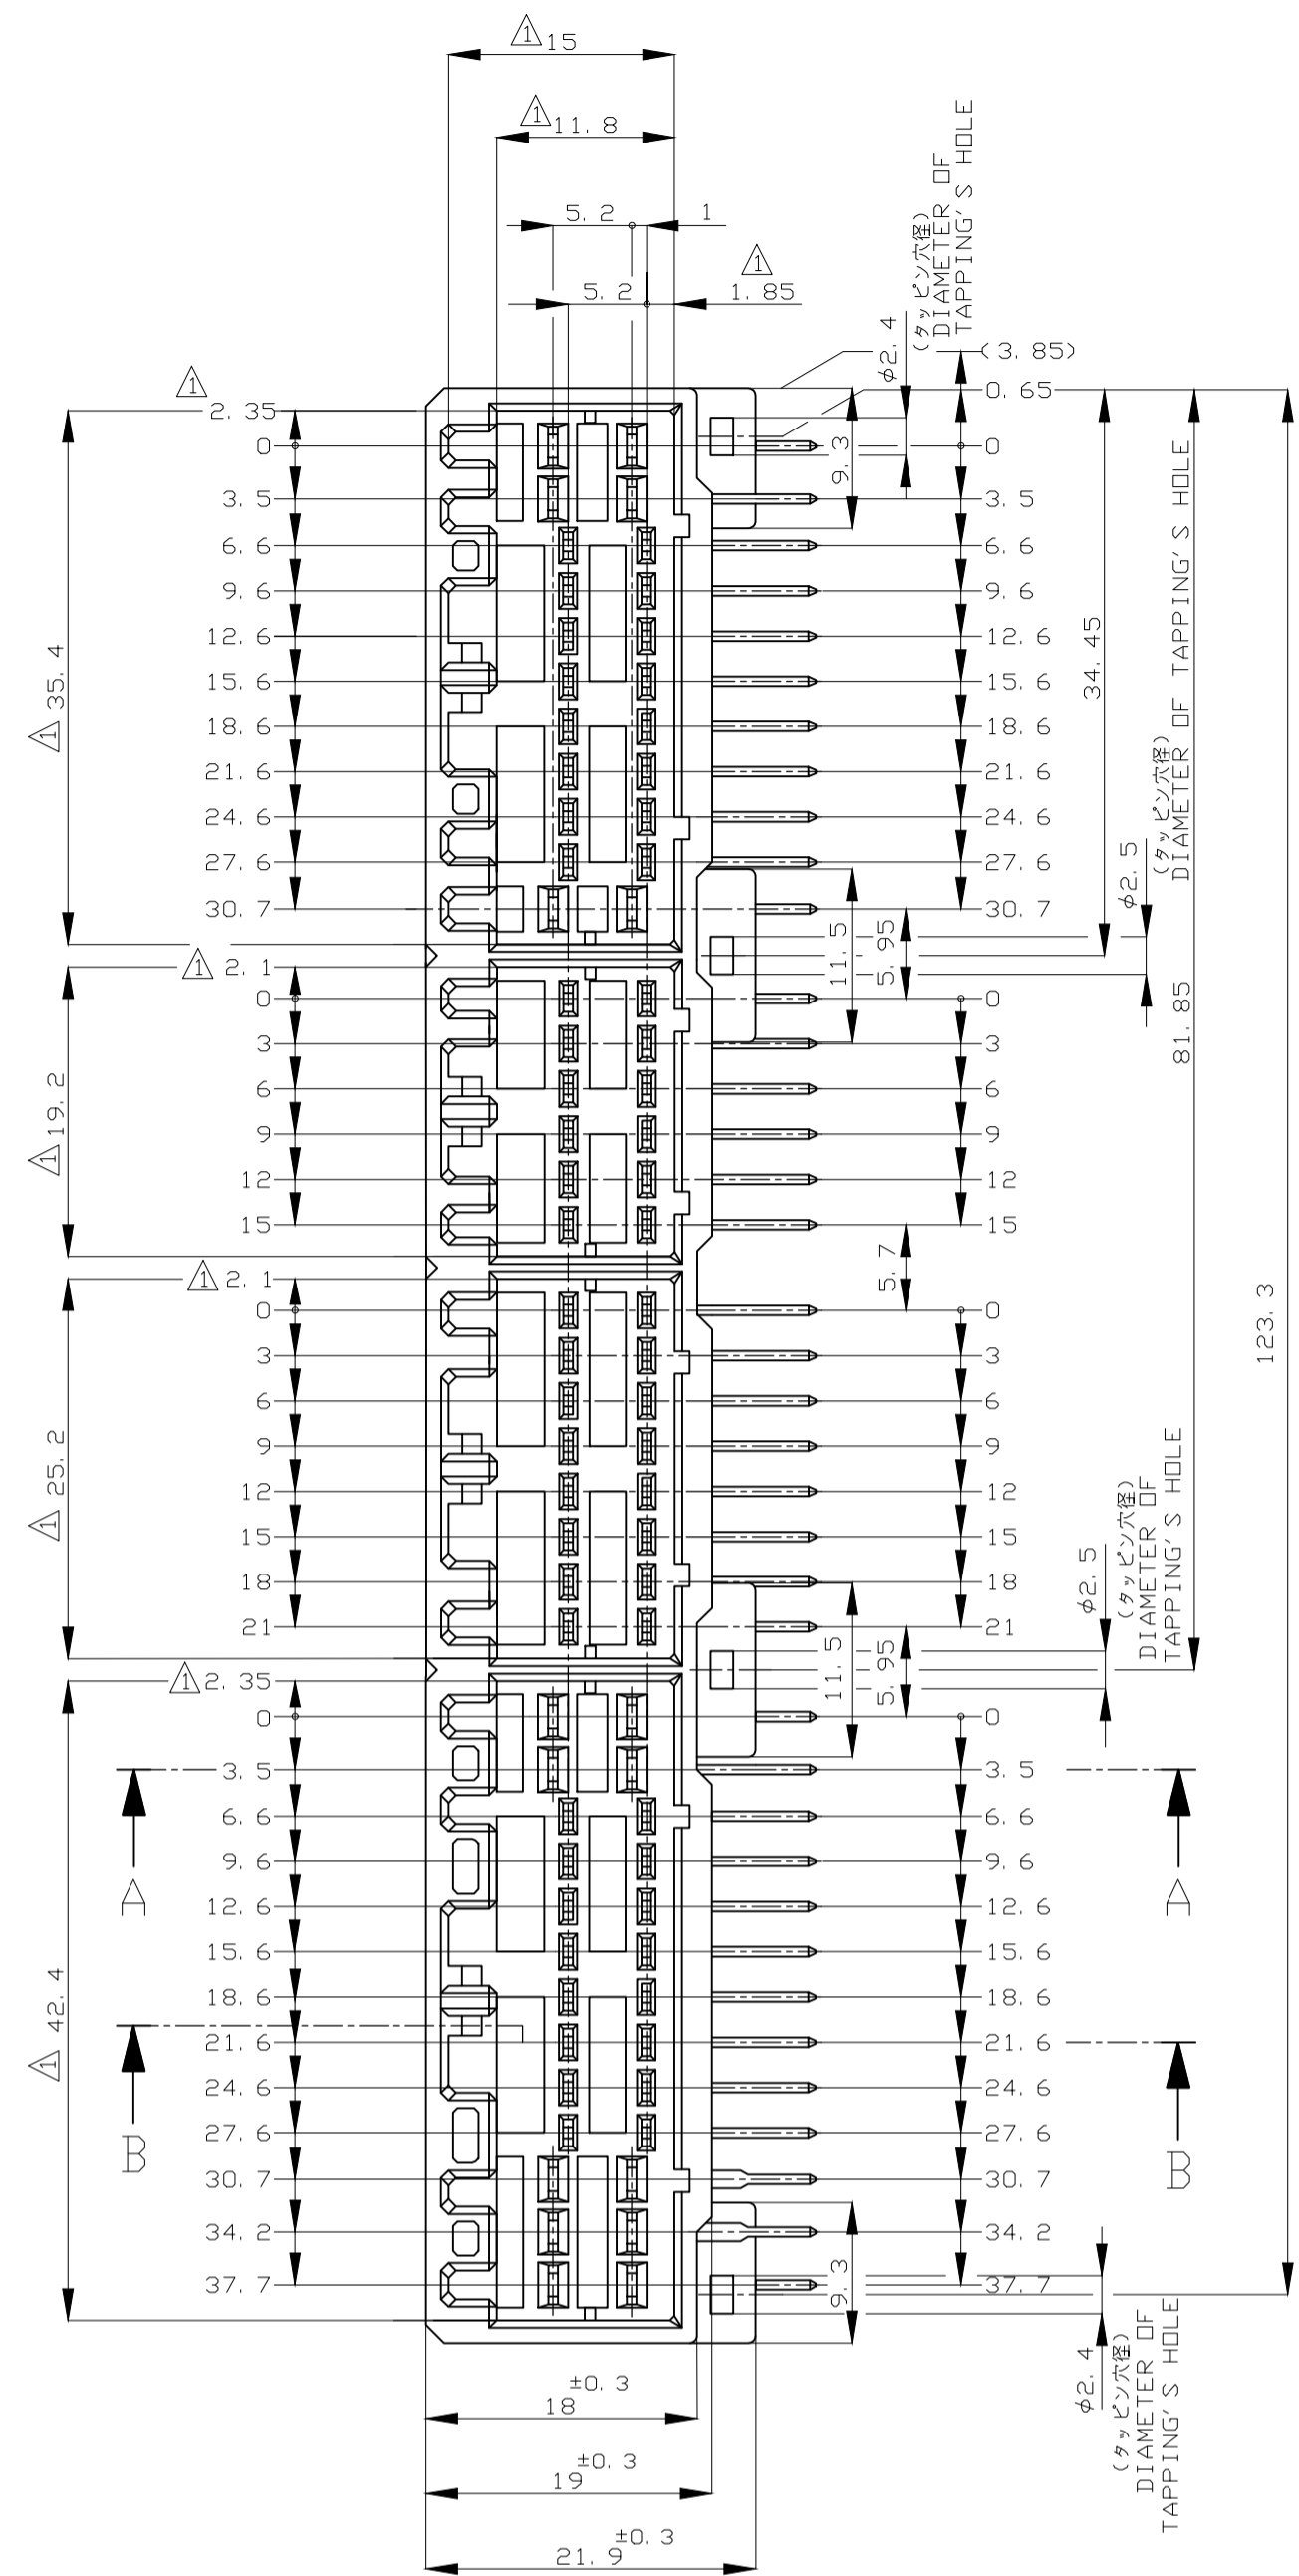
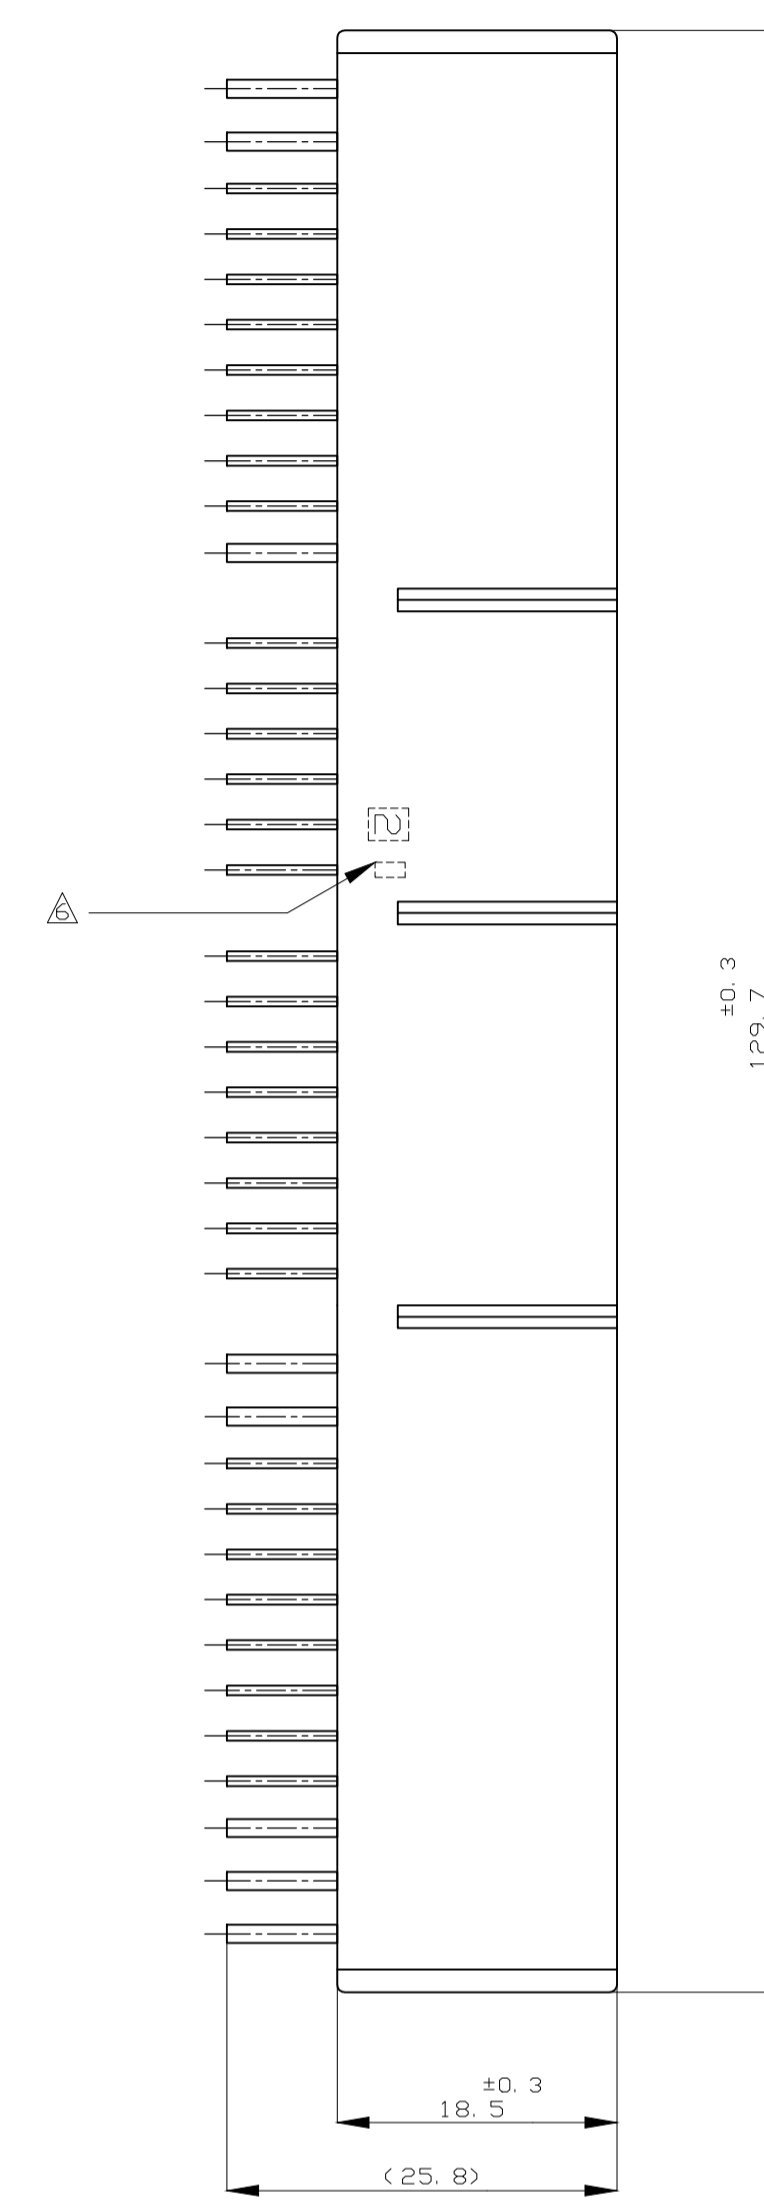
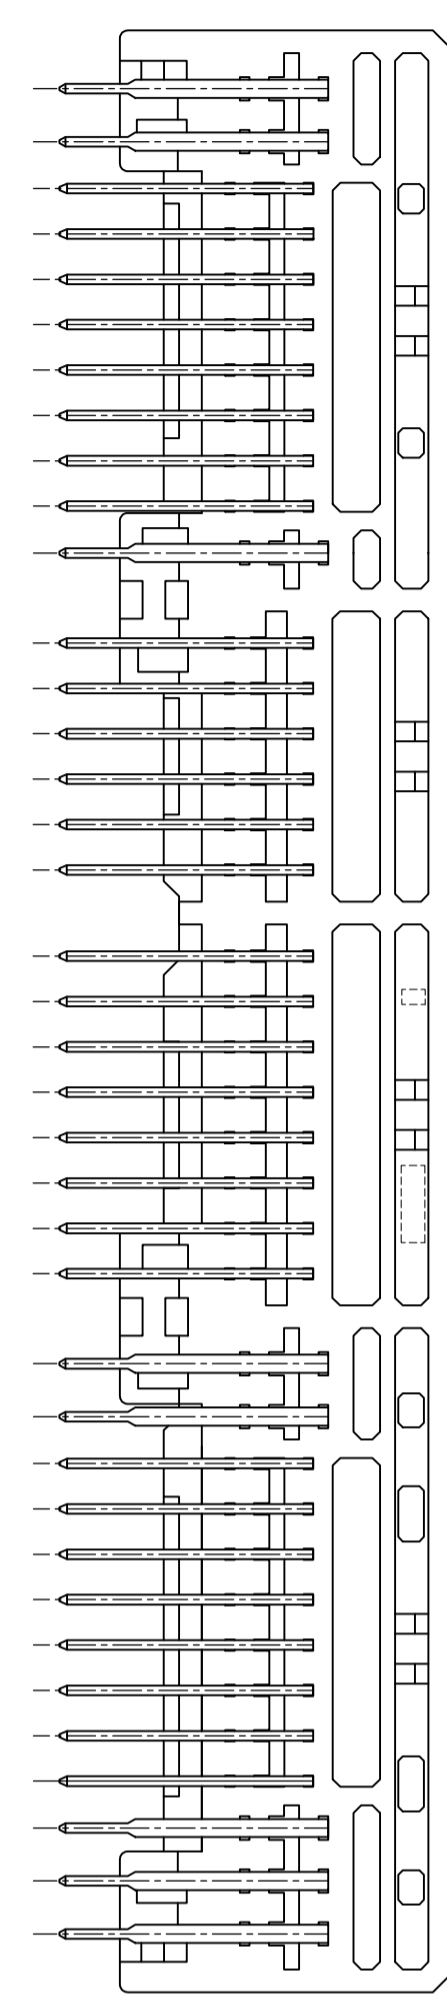
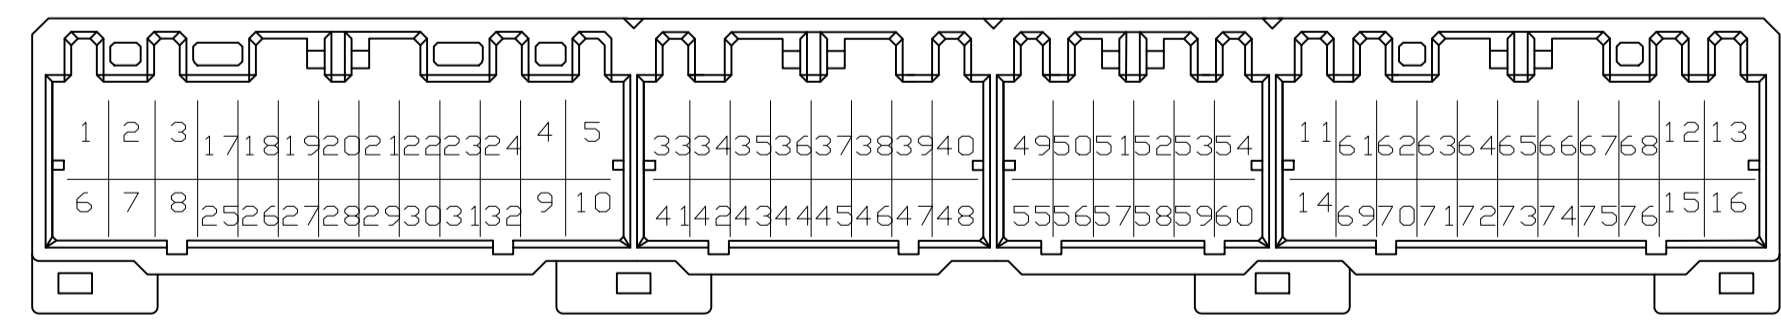


REVISIONS					
REV	DATE	DESCRIPTION	BY	CHK	APPV
P9	11NOV2020	OBSOLETE PN 5-178780-2 ECR-20-007046	PSJ	TM	

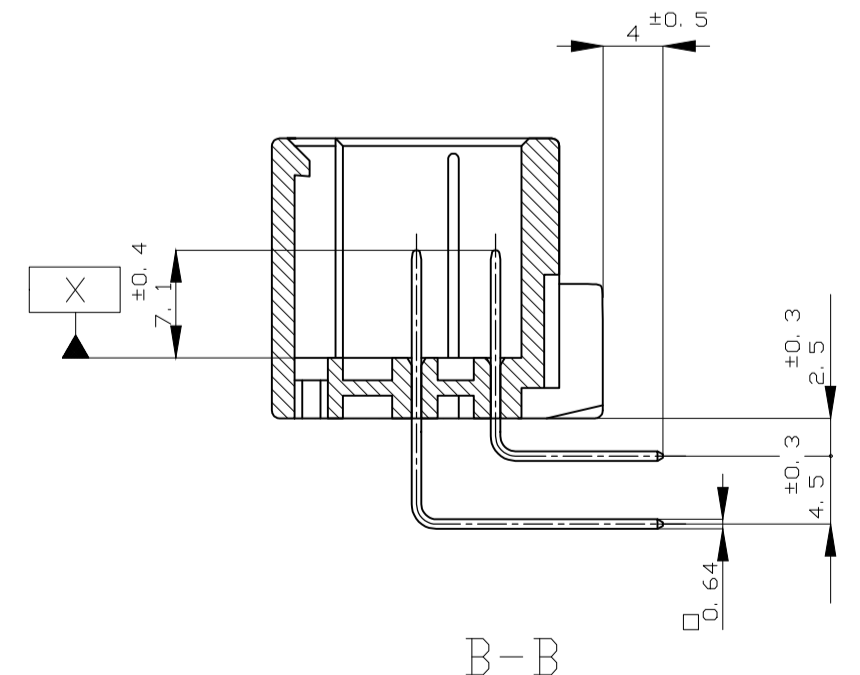

- △ X 面から2mmの範囲で測定
- 2. 嵌合相手ハウジング型: 174516, 174515, 174514, 174913, 917992, 917989, 917981, 917975
- 3. 推奨取付ねじ: JIS B1115, B1122 タッピングねじ, なべ2種 呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-cm以下)
- 4. 適用製品規格番号: 108-5280, 108-5342
- △ 回路番号: 右図参照のこと
- パワ回路 ① ~ ⑩
- シグナル回路 ⑪ ~ ⑯
- △ 適用製品規格のグラフィックス及びIDマークを カラネットマークにて表示

- △ MUST BE KEPT BETWEEN X AND 2
- 2 THE MATING PLUG HSG. PART NUMBER; 174516, 174515, 174514, 174913, 917992, 917989, 917981, 917975
- 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH MAX.)
- PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115, B1122
- < TIGHTENING TORQUE; 0.4N-cm MAX. >
- 4 APPLICABLE PRODUCT SPEC NO. 108-5280, 108-5342
- △ CIRCUIT NUMBER
- POWER CIRCUIT NO. ① ~ ⑩
- SIGNAL CIRCUIT NO. ⑪ ~ ⑯
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY HOT MARK

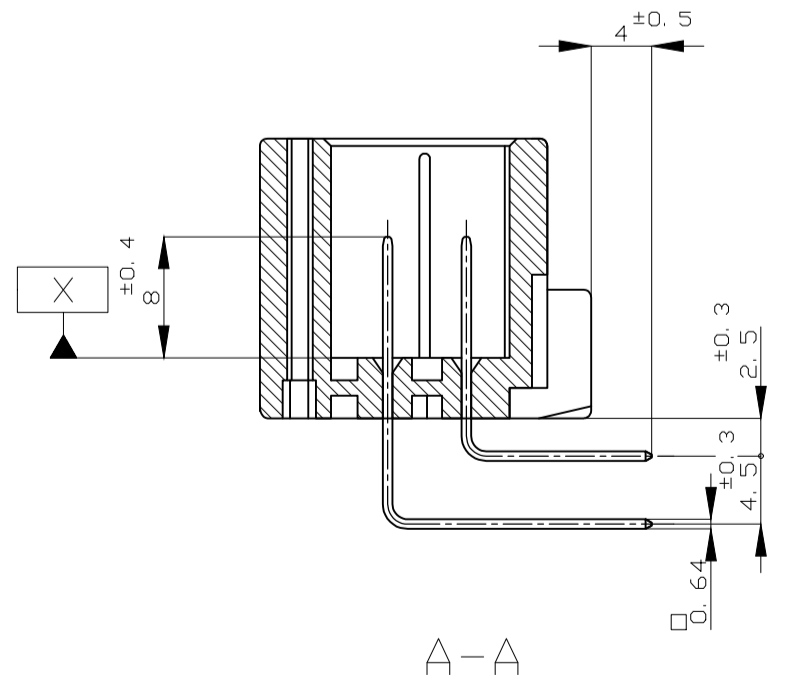

REV	DESCRIPTION	DATE	BY	CHK	APPV	
56	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 14 PRE-TIN x 62	24, 31, 39, 40 42~50, 55	-	-	GRAY	6-5178780-6
55	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 28 PRE-TIN x 48	25~32, 35~40 43~52, 55~58	-	-	BLACK	5-5178780-2
55	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 28 PRE-TIN x 48	25~32, 35~40 43~52, 55~58	-	-	NATURAL	5-5178780-1
54	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 28 PRE-TIN x 48	23, 24, 31~51 55~57, 63, 64	-	-	YELLOW	4-5178780-7
54	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 8 PRE-TIN x 68	49, 50, 52, 53, 68 70, 71, 74	-	-	GRAY	4-5178780-6
53	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 12 PRE-TIN x 64	26~32, 40, 49~52	-	-	YELLOW	3-5178780-7
53	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 60 PRE-TIN x 16	17~76	-	-	GRAY	3-5178780-6
52	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 24 PRE-TIN x 52	23, 24, 31, 33~49 55, 63, 64	9	-	YELLOW	2-5178780-7
52	SELECTIE-TIN (MATTE) SELECTIVE GOLD x 19 PRE-TIN x 57	22, 24, 31, 34, 39~40 42~48, 49, 50, 55, 56, 63, 64	-	-	GRAY	2-5178780-6
△ 8	TIN-LEAD SELECTIVE GOLD x 7 PRE-TIN x 69	49, 50, 52, 53, 68 70, 74	-	-	GRAY	8-178780-6
△ 7	TIN-LEAD SELECTIVE GOLD x 10 PRE-TIN x 66	24, 31, 39, 44~47 49, 55, 64	-	-	GRAY	7-178780-6
△ 6	TIN-LEAD SELECTIVE GOLD x 14 PRE-TIN x 62	24, 31, 39, 40 42~50, 55	-	-	GRAY	6-178780-6
△ 5	TIN-LEAD SELECTIVE GOLD x 28 PRE-TIN x 48	25~32, 35~40 43~52, 55~58	-	-	YELLOW	5-178780-7
△ 5	TIN-LEAD SELECTIVE GOLD x 28 PRE-TIN x 48	25~32, 35~40 43~52, 55~58	-	-	BLACK	5-178780-2
△ 5	TIN-LEAD SELECTIVE GOLD x 28 PRE-TIN x 48	25~32, 35~40 43~52, 55~58	-	-	NATURAL	5-178780-1
△ 4	TIN-LEAD SELECTIVE GOLD x 28 PRE-TIN x 48	23, 24, 31~51 55~57, 63, 64	-	-	YELLOW	4-178780-7
△ 4	TIN-LEAD SELECTIVE GOLD x 8 PRE-TIN x 68	49, 50, 52, 53, 68 70, 71, 74	-	-	GRAY	4-178780-6
△ 3	TIN-LEAD SELECTIVE GOLD x 60 PRE-TIN x 16	17~76	-	-	GRAY	3-178780-6
△ 2	TIN-LEAD SELECTIVE GOLD x 24 PRE-TIN x 52	23, 24, 31, 33~49 55, 63, 64	9	-	YELLOW	2-178780-7
△ 0	PRE-TIN x 76	-	-	-	LIGHT GRAY	178780-9
△ 1	SELECTIE-TIN (MATTE) SELECTIVE-TIN (BRIGHT) x 76 PRE-TIN x 76	-	-	-	NATURAL	178780-3
△ 0	PRE-TIN x 76	-	-	-	NATURAL	178780-1

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

GENERAL TOLERANCE: 0<< 10 ±0.2, 10<< 30 ±0.25, 30<< 100 ±0.3, ANGLES ±3°

MATERIAL: HOUSING: PBT, CONTACT: BRASS

FINISH: 仕上

SEE TABLE

WEIGHT: 23.8 g

SCALE: 2:1

SHEET: 1 of 1

REV: P9

APPROVED: M. KADOSAKI, T. SHINOHARA, K. BETSUJI

TE Connectivity

76POS CAP HOUSING ASSY
.040/.070 SERIES HYBRID I/O CONN. (NON FLANGE)

00779 178780