

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	436450800	MICROFIT 3.0 RECEPTACLE SGL ROW 8 CKT	2	PC
C	430300038	MicroFit 3.0 F Crp Term Chn Tin 18	16	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B8	1X18AWG DISC SR-PVC BK UL10002	BLACK
A2	B7	1X18AWG DISC SR-PVC BK UL10002	BLACK
A3	B6	1X18AWG DISC SR-PVC BK UL10002	BLACK
A4	B5	1X18AWG DISC SR-PVC BK UL10002	BLACK
A5	B4	1X18AWG DISC SR-PVC BK UL10002	BLACK
A6	B3	1X18AWG DISC SR-PVC BK UL10002	BLACK
A7	B2	1X18AWG DISC SR-PVC BK UL10002	BLACK
A8	B1	1X18AWG DISC SR-PVC BK UL10002	BLACK

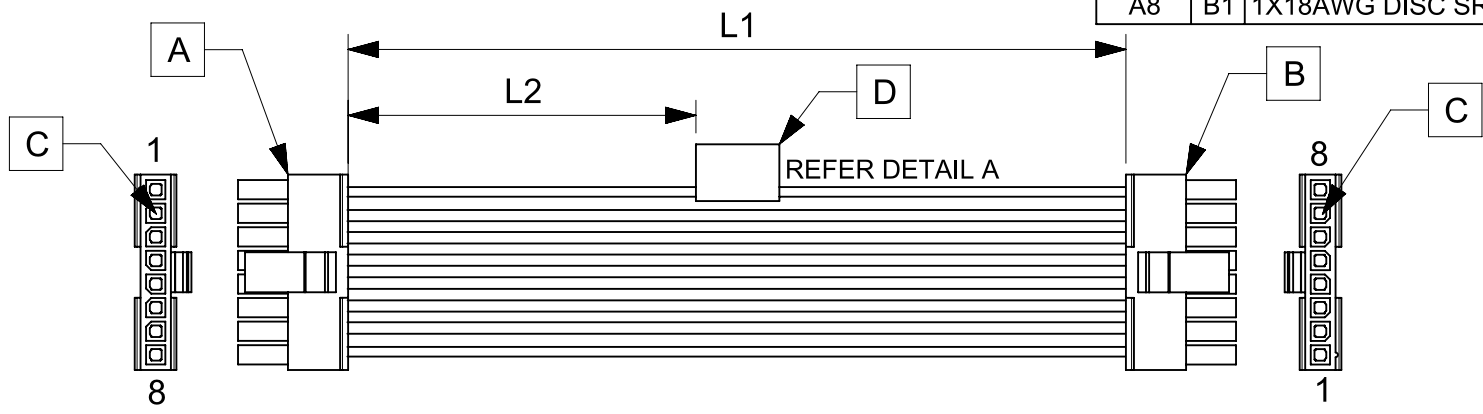


TABLE			
PART NUMBER	L1	L2	TITLE
2147501081	150±8	63 REF	MICROFIT 3.0 SR R-R 8CKT 150 MM Sn
2147501082	300±10	138 REF	MICROFIT 3.0 SR R-R 8CKT 300 MM Sn
2147501083	600±10	288 REF	MICROFIT 3.0 SR R-R 8CKT 600 MM Sn

- NOTES**
- Cable assembly must pass 100% continuity and polarity test.
 - Connector view shown is from mating side.
 - Label text must be 2mm max. in height with Arial font.
 - Label must be wrapped in Flag type on a single cable.

MOLEX P/N
 MOLEX
 BATCH WK/YR
 DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2020/02/29	A	INITIAL RELEASE	ARAJU

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC:	molex		
mm	NTS		SEE TABLE		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 637489	PRODUCT CUSTOMER DRAWING		
ANGULAR TOL	± °	DRWN: ARAJU 2020/02/29			
4 PLACES	±	CHK'D: RDESAI01 2020/05/14	DOCUMENT NUMBER DOC TYPE DOC PART REVISION		
3 PLACES	±	APPR: RDESAI01 2020/05/14			
2 PLACES	±	INITIAL REVISION:			
1 PLACE	±	DRWN: ARAJU 2020/02/29	MATERIAL NUMBER CUSTOMER SHEET NUMBER		
0 PLACES	±	APPR: RDESAI01 2020/05/14			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	
			A4-SIZE	214750	

RELEASE STATUS	P1	RELEASE DATE	2020/05/14	03:37:00
----------------	----	--------------	------------	----------