

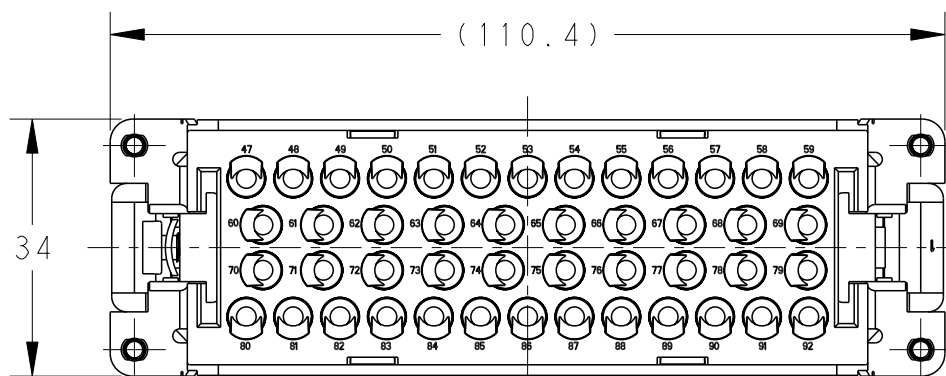



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	03APR2015	DW	CW
	B	ECR-15-014907	14OCT2015	DL	CW
	C	ECR-21-108559	06AUG2021	BS	CW

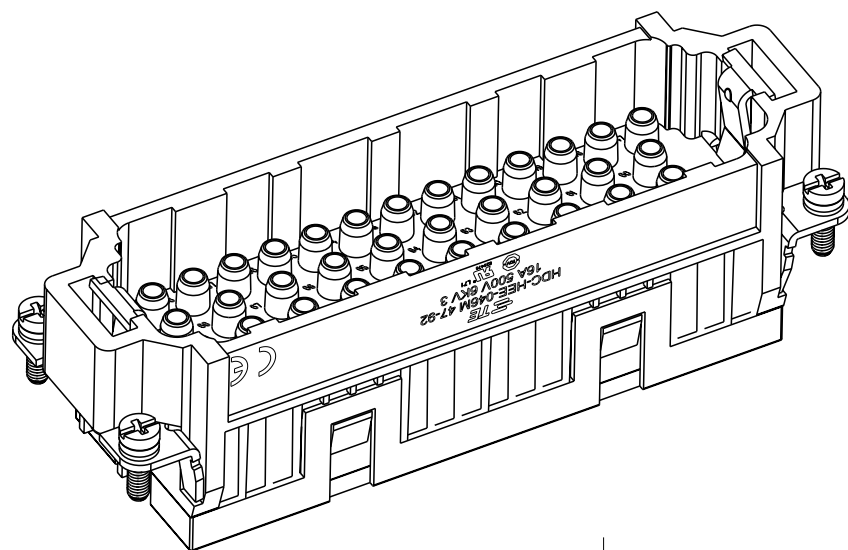

M4 THREAD
RECOMMENDED
TIGHTENING TORQUE 1.2Nm

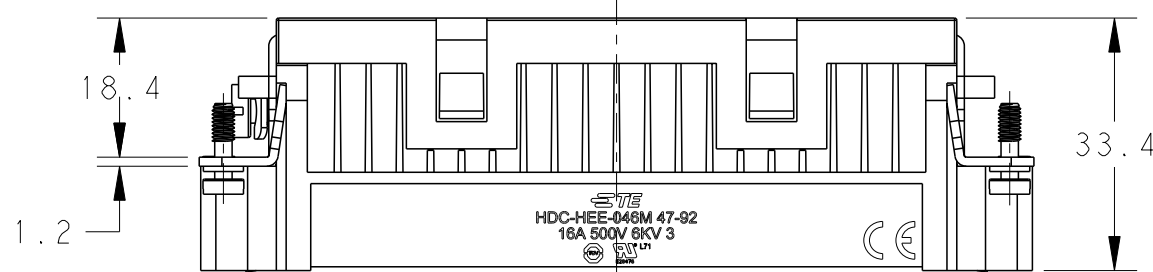

4X M3 THREAD, RECOMMENDED
TIGHTENING TORQUE 0.5Nm

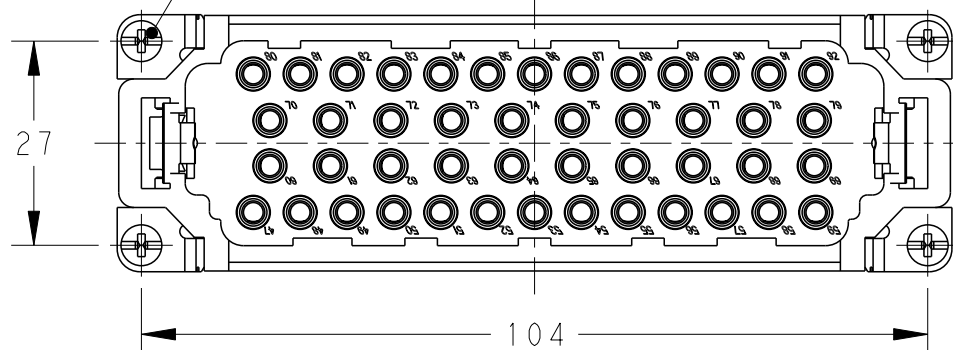


NOTES:

- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 500V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: 0.14-4 mm² (26-12 AWG)
CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

注释:

- 技术参数:
绝缘材料: PC
额定电压: 500V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 0.14-4 mm² (26-12 AWG)
接线类型: 冷压接
- 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS

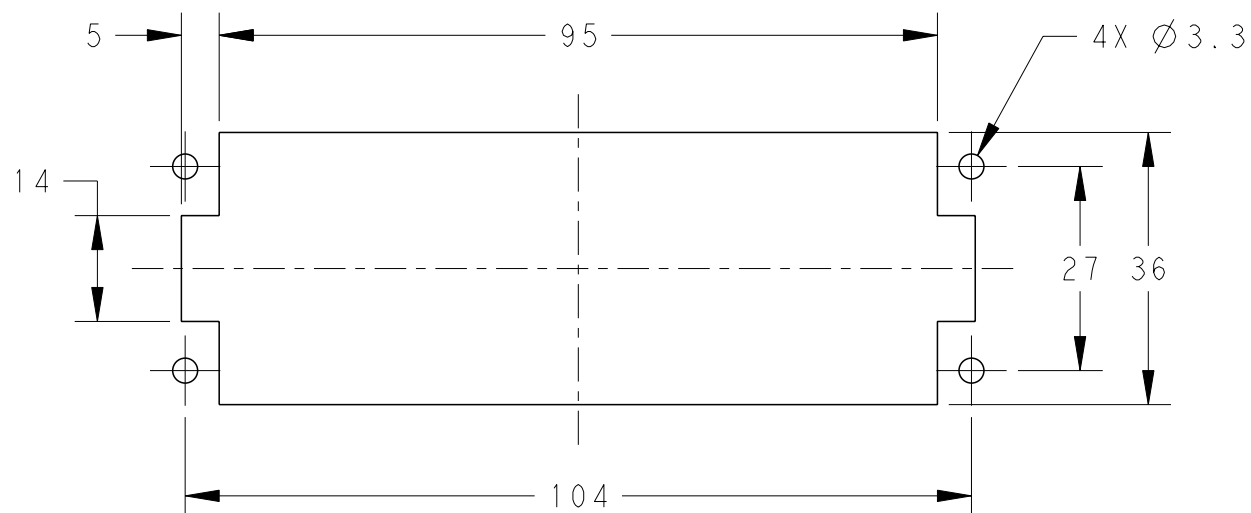

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
	ANGLES ±-
MATERIAL	FINISH
-	-
-	-

DWN	03APR2015
David Wang	
CHK	03APR2015
Chris Wang	
APVD	03APR2015
Xiang Xu	
PRODUCT SPEC	108-106137
APPLICATION SPEC	114-106137
WEIGHT	-
Customer Drawing	

HEE-046-M 47-92	T2050922101-000
DESCRIPTION	PART NUMBER

		TE Connectivity	
		NAME HEE-046-M 47-92	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	T2050922101000	-
SCALE		SHEET	REV
1:1		1 OF 1	C

Printed on 10 Aug 2021 11:33 (China Standard Time) from TE236667