


Data sheet | Item number: 787-2850

Power supply; Compact; 1-phase; 24 VDC output voltage; 1.25 A output current



www.wago.com/787-2850

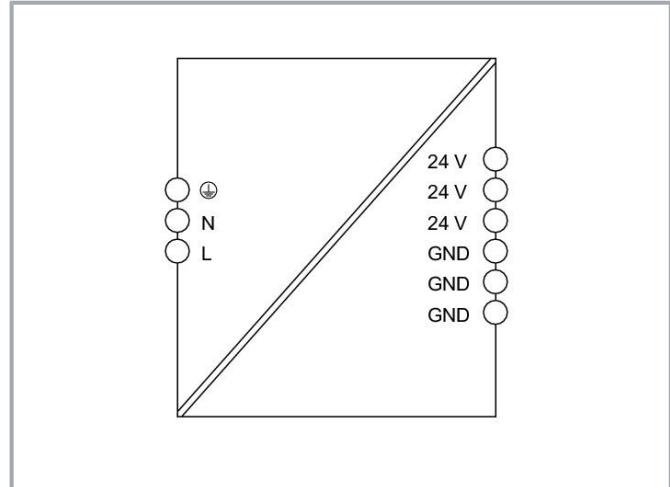

Item description

Features:

- Stepped profile for installation in standard distribution boards
- Connection technology with Push-in CAGE CLAMP®
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV/PELV) per EN 61010-2-201/UL 61010-2-201

Data

Technical data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Input

Phases	1
Nominal input voltage $U_{i\text{ nom}}$	1 x AC 110 ... 240 V
Input voltage range	1 x AC 100 ... 264 V
Nominal mains frequency range	50 ... 60 Hz
Input current I_i	≤ 0.55 A (110 VAC); ≤ 0.33 A (240 VAC)
Inrush current	≤ 24 A (NTC)
Mains failure hold-up time	≥ 95 ms (230 VAC)

Output

Nominal output voltage $U_{o\text{ nom}}$	DC 24 V (SELV)
Output voltage range	DC 24 ... 24 V (fixed setting)
Nominal output current $I_{o\text{ nom}}$	1.25 A (24 VDC)
Nominal output power	30 W
Residual ripple	≤ 60 mV (peak-to-peak)
Overload behavior	Hiccup

Signaling and Communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U_o)

Efficiency/power losses

Power loss P_i	≤ 0.5 W; ≤ 4 W (230 VAC; nominal load)
Power loss (max.) $P_{i\text{ (max.)}}$	5 W (110 VAC / 24 VDC; 1.35 A)
Efficiency (typ.)	88 %

Circuit protection

Internal fuse	T 1.25 A / 250 VAC
Backup fusing (recommended)	16 A (for USA/Canada: 15 A)

Safety and protection

Isolation voltage (pri.-sec., AC)	3,920 V
Isolation voltage (pri.-PE, AC)	2,470 V

Subject to changes. Please also observe the further product documentation!



Isolation voltage (sec.-PE)	DC 0.5 kV
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	III
Pollution degree	2
Overvoltage protection; secondary	≤ 32 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 2,500,000 h (per EN/IEC 61 709 at +40 °C)

Connection data

Connection type 1	Input
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 804 Series
Solid conductor	0.25 ... 2.5 mm ² / 20 ... 12 AWG
Fine-stranded conductor	0.25 ... 2.5 mm ² / 22 ... 12 AWG
Strip length	10 ... 11 mm / 0.39 ... 0.43 inches
Connection type 2	Output
Connection technology 2	Push-in CAGE CLAMP®
WAGO connector 2	WAGO 805 Series
Solid conductor 2	0.2 ... 1.5 mm ² / 24 ... 16 AWG
Fine-stranded conductor 2	0.2 ... 1.5 mm ² / 24 ... 16 AWG
Strip length 2	9 ... 10 mm / 0.35 ... 0.39 inches
Cable length (max.)	30 m

Physical data

Width	36 mm / 1.417 inches
Height	90 mm / 3.543 inches
Depth	62 mm / 2.441 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Subject to changes. Please also observe the further product documentation!



Material Data

Flammability class per UL94	V0
Fire load	0.103 MJ
Weight	120 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Nominal mounting position; -25 ... +55 °C (in any mounting position))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-1.7 %/K (> 55 °C)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61204-3 EN 61010-1 EN 61010-2-201 cULus 61010-1 cULus 61010-2-201 DNV SEMI F47

Commercial data

ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143810906
Customs tariff number	85044083900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
------	----------	--------------------------	------------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



EAC
ROSTEST-Moskau

TP TC 004/2011,TP TC 020/2011

RU_C-DE.
AJA46.B.
04525_19




UL
Underwriters Laboratories Inc.


UL 61010-2-201

E255817

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Logo	Approval	Additional Approval Text	Certificate name
	DNV DNV Germany GmbH	DNV-CG-0339,Aug.2021	TAA00001ZJ

Optional accessories

Tool

Operating tool



Item no.: 210-720

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Downloads

Documentation

Bid Text

787-2850 X81 - Datei	2019 Jul 4	xml 7.1 kB	Download
787-2850	2019 Jul 4	docx 20.8 kB	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



docx - Datei

Instruction Leaflet

Power Supply Compact DC 24 V, 1,25 A, SELV	V 2.0.0 2022 Jul 19	pdf 2.2 MB	Download
---	------------------------	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAE data

ZUKEN Portal 787-2850	URL	Download
EPLAN Data Portal 787-2850	URL	Download

CAD data

2D/3D Models 787-2850	URL	Download
-----------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-2850 Power supply; Compact; 1-phase; 24 VDC output voltage; 1.25 A output current	URL	Download
---	-----	----------

Installation Notes

Product family

EPSITRON COMPACT Power

EPSITRON® COMPACT POWER: Compact, High-Performance Power Supplies

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!