


Recommended Panel Cut-out

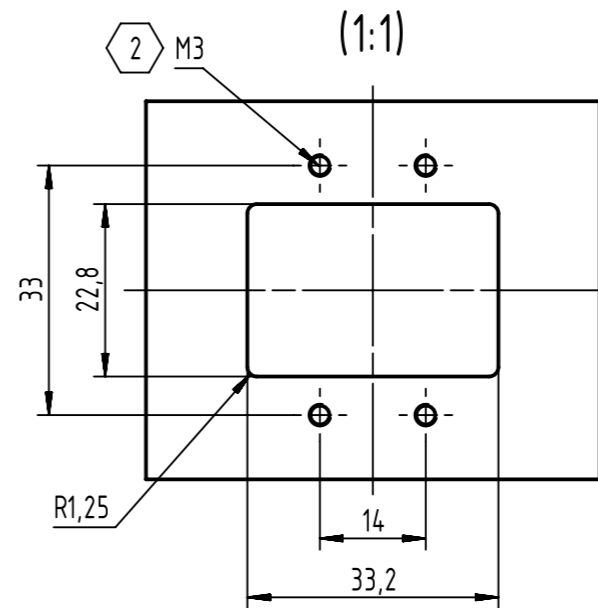

IP65/67 PushPull Panel feed through metal 24 volt connector acc. PROFINET

1 Flexible coding keys are mounted on P1, P3 and P4

2 The recommended screw torque for M3 is 0,6Nm

	All rights reserved Department EC PD - CN HARTING Electronics GmbH D-32339 Espelkamp	All Dimensions in mm Original Size DIN A3	Scale 2:1	Free size tol.	Ref. Sub.
		Created by HUK	Inspected by WANGSTE	Standardisation HOFFMANN	Date 2017-05-24
Title Han PP Power L Metal PFT flexible coding					Doc-Key / ECM-Nr. 100654225/UGD/001/C 500000119989
Type TB		Number 09354340311			Rev. C Page 1/1