


Data sheet | Item number: 756-5503/030-010




Sensor/Actuator cable; M12A socket; angled; M8 plug; straight; 3-pole;  
Length: 1 m



[www.wago.com/756-5503/030-010](http://www.wago.com/756-5503/030-010)

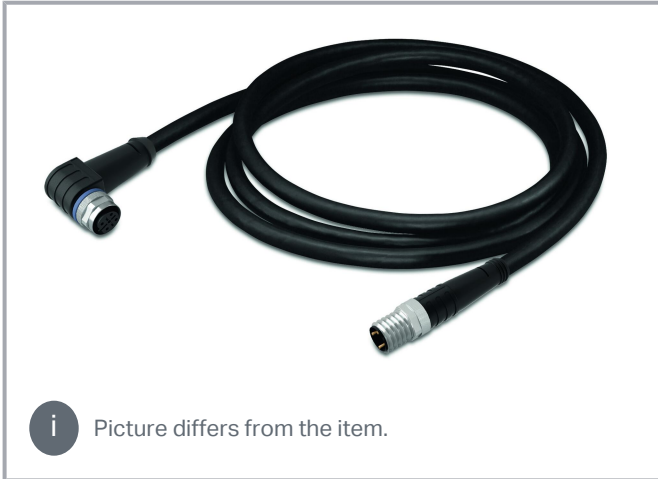

 Picture differs from the item.

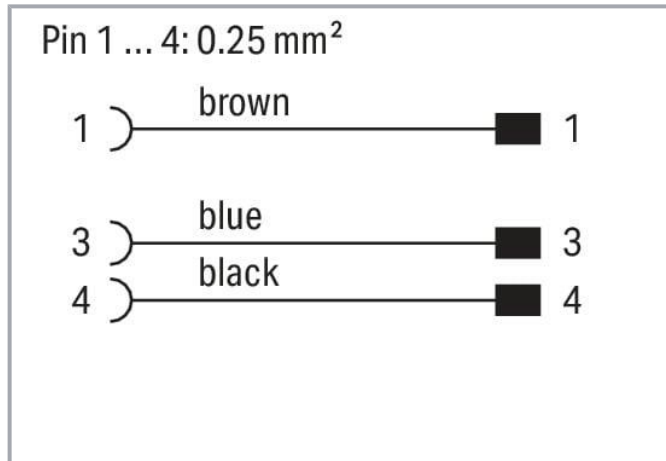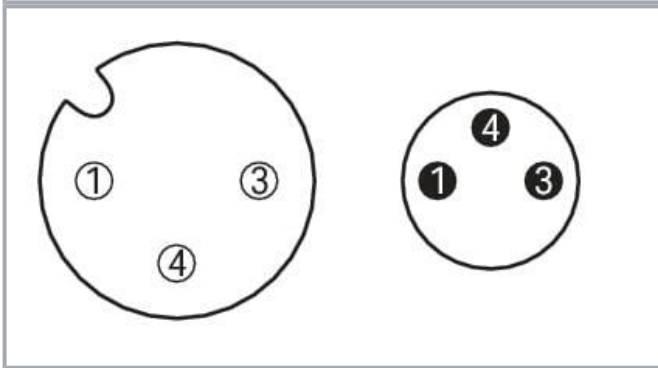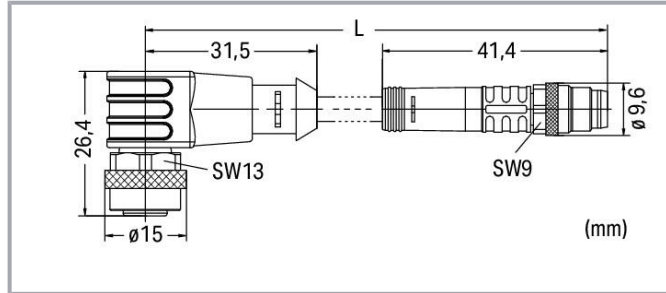

### Item description

#### Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Data

### Technical data

#### General

Operating voltage	AC/DC 60 V
Operating current	4 A
Rated surge voltage	1.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

#### Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

#### Cable

Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	3.9 ... 4.3 mm

#### Connector

Connection type	M12 Socket - M8 plug
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	0 °

Subject to changes. Please also observe the further product documentation!



Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	0.6 ... 1 Nm

### Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4044918974806
Customs tariff number	85444290900

### Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	edb410b9-1b63-4fdc-ac18-9d2832473dac
SCIP notification number (Belgium)	e4b67269-385c-4120-a009-5269dc6f4daa
SCIP notification number (Bulgaria)	85978986-2d93-4829-9af0-699a92a4f9ec
SCIP notification number (Czech Republic)	328d78b1-ae52-4999-a1cc-37bfc8e9536d
SCIP notification number (Denmark)	d81f2019-edf2-42b4-9e3f-119ff93fbc84
SCIP notification number (Finland)	6a4b4b6b-709e-4972-a80f-9acf57224575
SCIP notification number (France)	fd21f00a-aec4-4f18-9239-d37a801493b2
SCIP notification number (Germany)	2d0eb667-8125-4638-adb9-c26f288c8404
SCIP notification number (Hungary)	5eaff33c-7904-42fc-9dd1-3a243fc0599e
SCIP notification number (Italy)	c45e739d-8922-43c8-a645-0f0a24f23c9d
SCIP notification number (Netherlands)	96db5eb8-191d-4e36-9a5d-b623b1240e9e
SCIP notification number (Poland)	f380bdd4-e4af-4270-a3ee-63e641aebf43
SCIP notification number (Romania)	2bfb1321-a185-4625-ae01-289f986656e6
SCIP notification number (Sweden)	ae29df24-a241-4fce-a6c0-5907bd73648c

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Downloads

### Documentation

#### Bid Text

756-5503/030-010 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
---------------------------------	-------------	---------------	----------

756-5503/030-010 doc - Datei	2017 Sep 20	doc 26.6 kB	Download
---------------------------------	-------------	----------------	----------

#### System Description

IP67 Cables and Pluggable Connectors		pdf 161.6 kB	Download
--------------------------------------	--	-----------------	----------

## CAD/CAE-Data

#### CAE data

WSCAD Universe 756-5503/030-010		URL	Download
---------------------------------	--	-----	----------

WSCAD Universe 756-5503/030-010		URL	Download
---------------------------------	--	-----	----------

## Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 756-5503/030-010 Sensor/Actuator cable; M12A socket; angled; M8 plug; straight; 3-pole; Length: 1 m		URL	Download
---	--	-----	----------

## Installation Notes

Subject to changes. Please also observe the further product documentation!