THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG
© COPYRIGHT – By –
RELEASED FOR PUBLICATION
FREI FUER VEROEFFENTLICHUNG
ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN

MATED WITH:
PASSEND ZU:
BG6

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	C11	ECR-17-009069	12FEB2018	SG	MKO

Screw version
Thermo

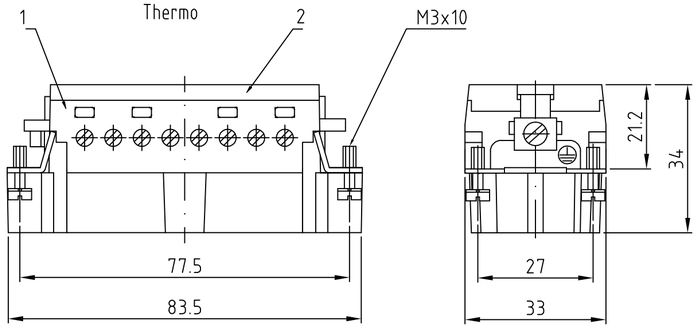

Crimp version

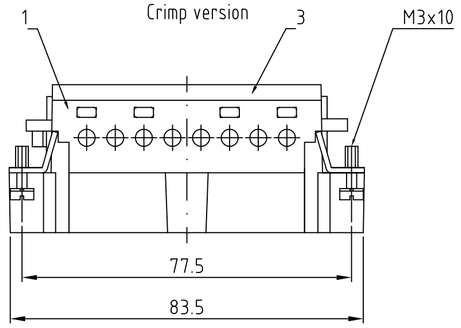

spring clamp version

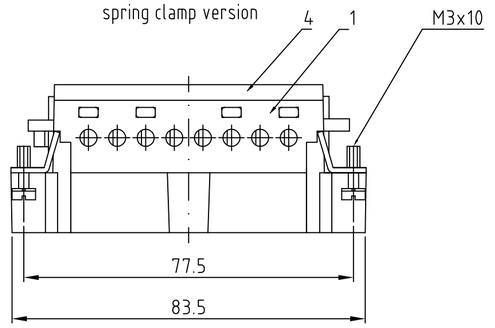

assembly directions



×distance for a safe contact max: max: 21 mm

Contact arrangement view from termination side

Printing 1-16 Thermo

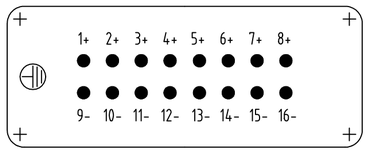

Printing 17-32 Screw

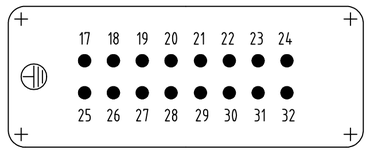

Printing 1-16 Screw

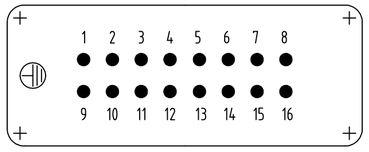

Printing 8+4+4 Screw/Thermo

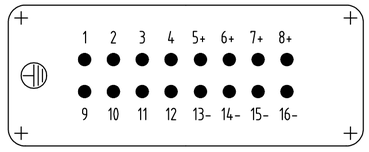

NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 6; 10: SERIES HB; HD;HIP;EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 200 PIECES

Panel cut-out for contact insert when used without housing

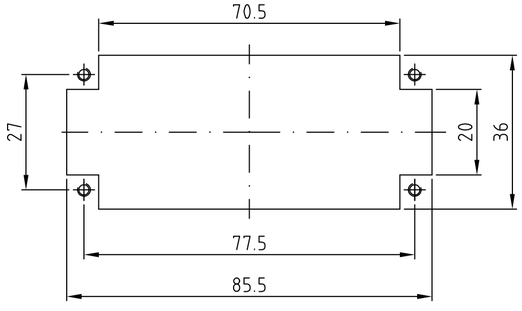

ORDERING TEXT	DESCRIPTION	MATERIAL	COLOR	ITEM NO. POS.	NOTES
OBSOLETE	0-19-4	cover spring clamp version		light grey	4	
OBSOLETE	1-89-5	cover crimp version		light grey	3	
SUPERSEDED BY T2040163101-000	7-97-1	cover screw version		light grey	2	
OBSOLETE	2-92-3	pin insert		light grey	1	
OBSOLETE	1-91-7					
	1-1					
HE.16.Sti.S.B 1-16.KM						
HE.16.Sti.S.B.17-32-AU						
HE.16.Sti.S-T.B 8+4+4						
HE.16.Sti.S.B.1-16-AU						
HE.16.Sti.SC.B.17-32						
HE.16.Sti.SC.B.1-16						
HE.16.Sti.C.B.17-32						
HE.16.Sti.C						
HE.16.Sti.S.B 17-32						
HE.16.Sti.S-T.B 1-16						
HE.16.Sti.S.B 1-16						

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.

DIMENSIONS: MASSE\NHEITEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES /WINKEL ± –

MATERIAL –
FINISH /OBERFLAECHE/FARBE –

DWN Schneider 08.02.99
CHK Schweiger 08.02.00
APVD –
PRODUCT SPEC PRODUKTSPEZ. –
APPLICATION SPEC. VERABEITUNGSSPEZ. –
WEIGHT GEWICHT

TE Connectivity

NAME
Male insert
HE.16.STIs/C
–

SIZE	CAGE CODE	DRAWING NO ZEICHNUNGS-NR.	RESTRICTED TO NUR FUER
A2	00779	C-1103638	–

CUSTOMER DRAWING /KUNDENZEICHNUNG
SCALE MASSSTAB 1:1
SHEET BLATT 1 von 1
REV C11

1103638