



(1)

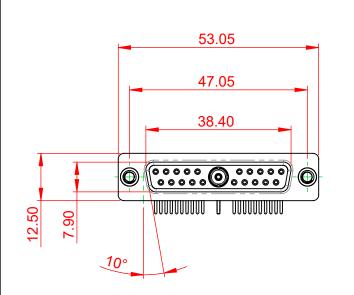



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:	THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C


POWER/CO-AX CONTACT RATING: 50Ω (IMPEDANCE) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.


5000MΩ min. **INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

.XX ±0.13

.XXX ±0.05



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
		CHECKED:	DATE:		
EDAC INC TORONTO, ONTARIO YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
		DRAWING NUMBER: 630-21W	1640-5TA	ISSUE	
		PART NUMBER: 630-21W	1640-5TA	1	





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



