


## Specification Sheet

Part Number: T50L1STNLM4

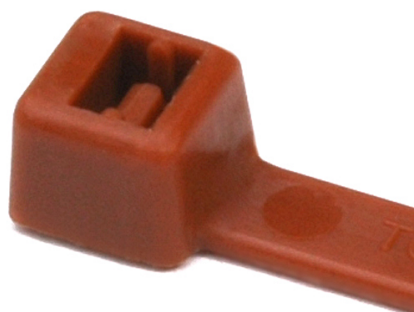

High-Temp Cable Tie, 15.35" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg

|                     |   |
|---------------------|---|
| Article Number      | 111-05423   |
| Type                | T50L  |
| Color               | Brown (BN)  |
| Features & Benefits | <ul style="list-style-type: none"><li>• Cable ties made of PA46 material provide a greater resistance to high heat exposures than PA66 heat stabilized material.</li><li>• Inside serrations allow for strong grip on cables and wire bundles.</li><li>• Head design provides high tensile strength with very low insertion force.</li><li>• Bent tail ensures a quick and simple installation.</li></ul> |
| Quantity Per        | bag   |

### Product Description

T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

|  |  |
|--|--|
| <b>Short Description</b>                   | High-Temp Cable Tie, 15.35" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg |
| <b>Global Part Name</b>                    | T50L-PA46-BN   |
| <b>Minimum Tensile Strength (Imperial)</b> | 50.0   |
| <b>Minimum Tensile Strength (Metric)</b>   | 225.0  |
| <b>Length L (Imperial)</b>                 | 15.35  |
| <b>Length L (Metric)</b>                   | 389.89   |
| <b>Identification Plate Position</b>       | none   |
| <b>Releasable Closure</b>                  | No   |
| <b>Tie Closure</b>                         | plastic pawl   |
| <b>Variant</b>                             | Inside Serrated  |
| <b>Width W (Imperial)</b>                  | 0.19   |
| <b>Width W (Metric)</b>                    | 4.8  |
| <b>Bundle Diameter Min (Imperial)</b>      | 0.06   |
| <b>Bundle Diameter Min (Metric)</b>        | 1.5  |
| <b>Bundle Diameter Max (Imperial)</b>      | 4.3  |
| <b>Bundle Diameter Max (Metric)</b>        | 109.2  |

|                             |     |
|-----------------------------|-----|
| <b>Thickness T (Metric)</b> | 1.4 |
|-----------------------------|-----|

|                 |                      |
|-----------------|----------------------|
| <b>Material</b> | Polyamide 4.6 (PA46) |
|-----------------|----------------------|

**Material Shortcut** PA46

|                     |          |
|---------------------|----------|
| <b>Flammability</b> | UL 94 V2 |
|---------------------|----------|

**Operating Temperature (Metric)** -40°F to +266°F (-40°C to +130°C)

|                                    |     |
|------------------------------------|-----|
| <b>Reach Complaint(Article 33)</b> | Yes |
|------------------------------------|-----|

**ROHS Complaint** Yes

|                                   |      |
|-----------------------------------|------|
| <b>Package Quantity(Imperial)</b> | 1000 |
|-----------------------------------|------|

**Package Quantity (Metric)** 1000

|                       |            |
|-----------------------|------------|
| <b>Customs Number</b> | 3926909988 |
|-----------------------|------------|

**Content Unit(BMEcat)** pcs.