

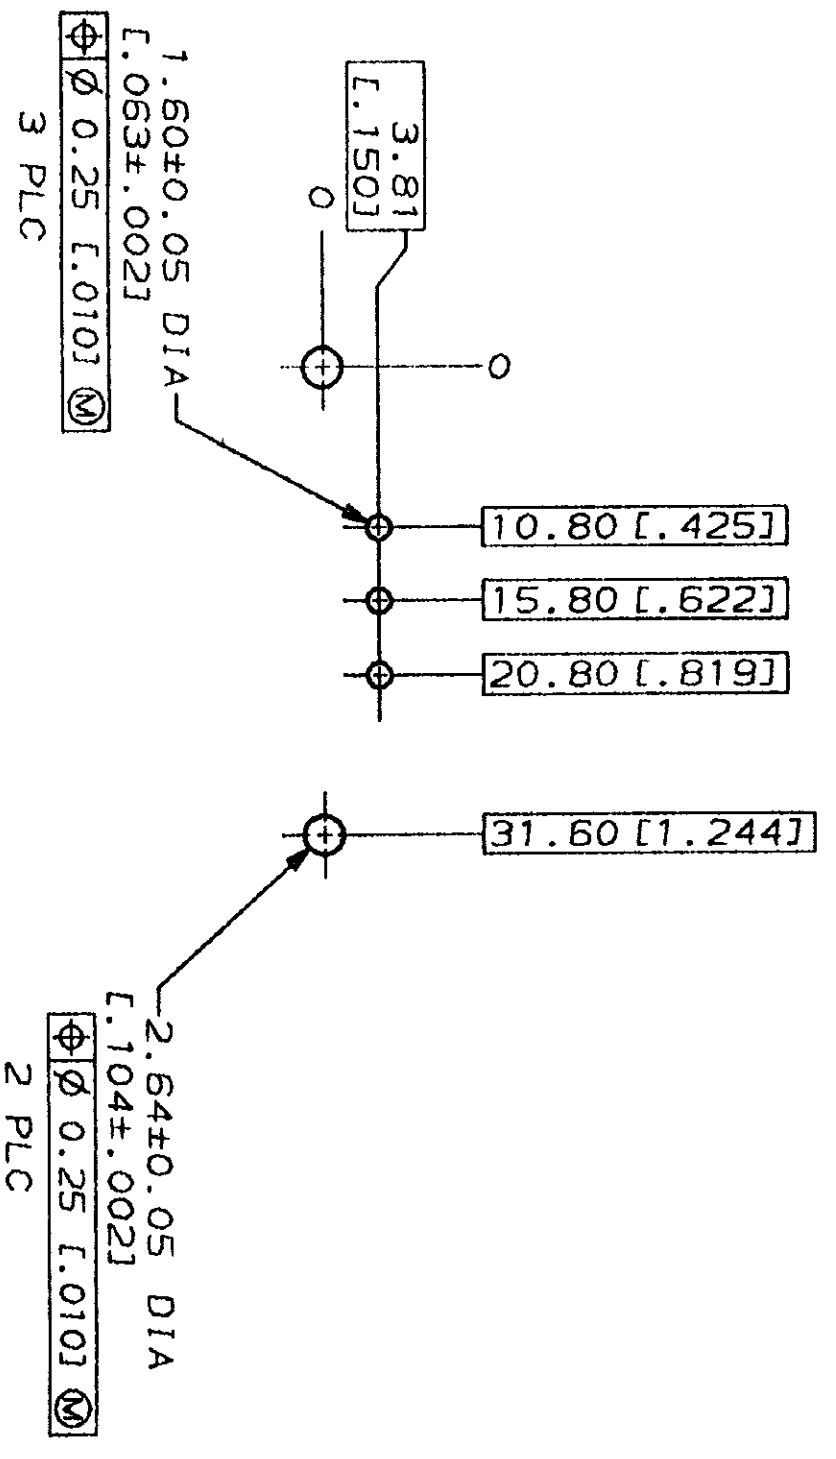


| REV | DATE     | DESCRIPTION             |
|-----|----------|-------------------------|
| 1   | 07/07/92 | REDDRAWN WITHOUT CHANGE |

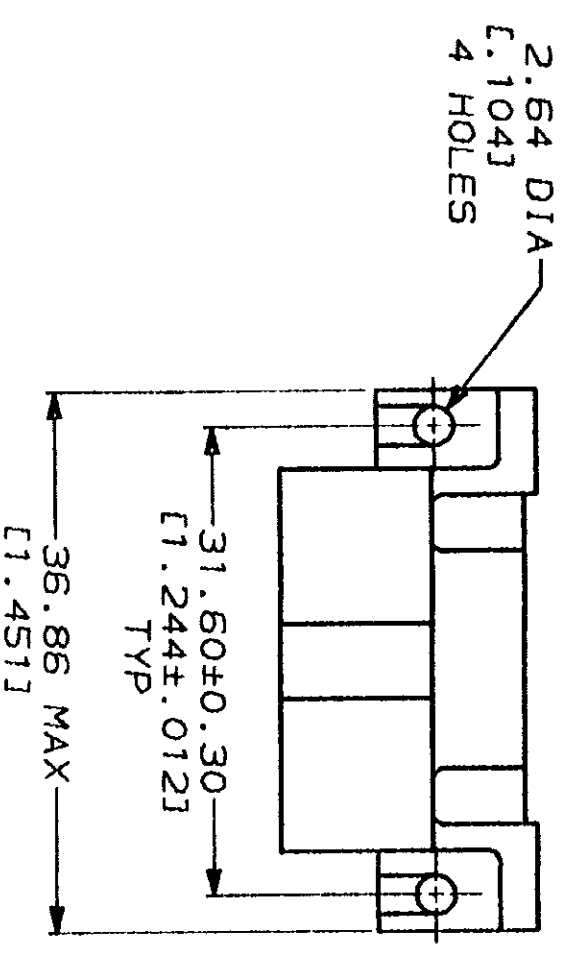

RECOMMENDED PC BOARD LAYOUT

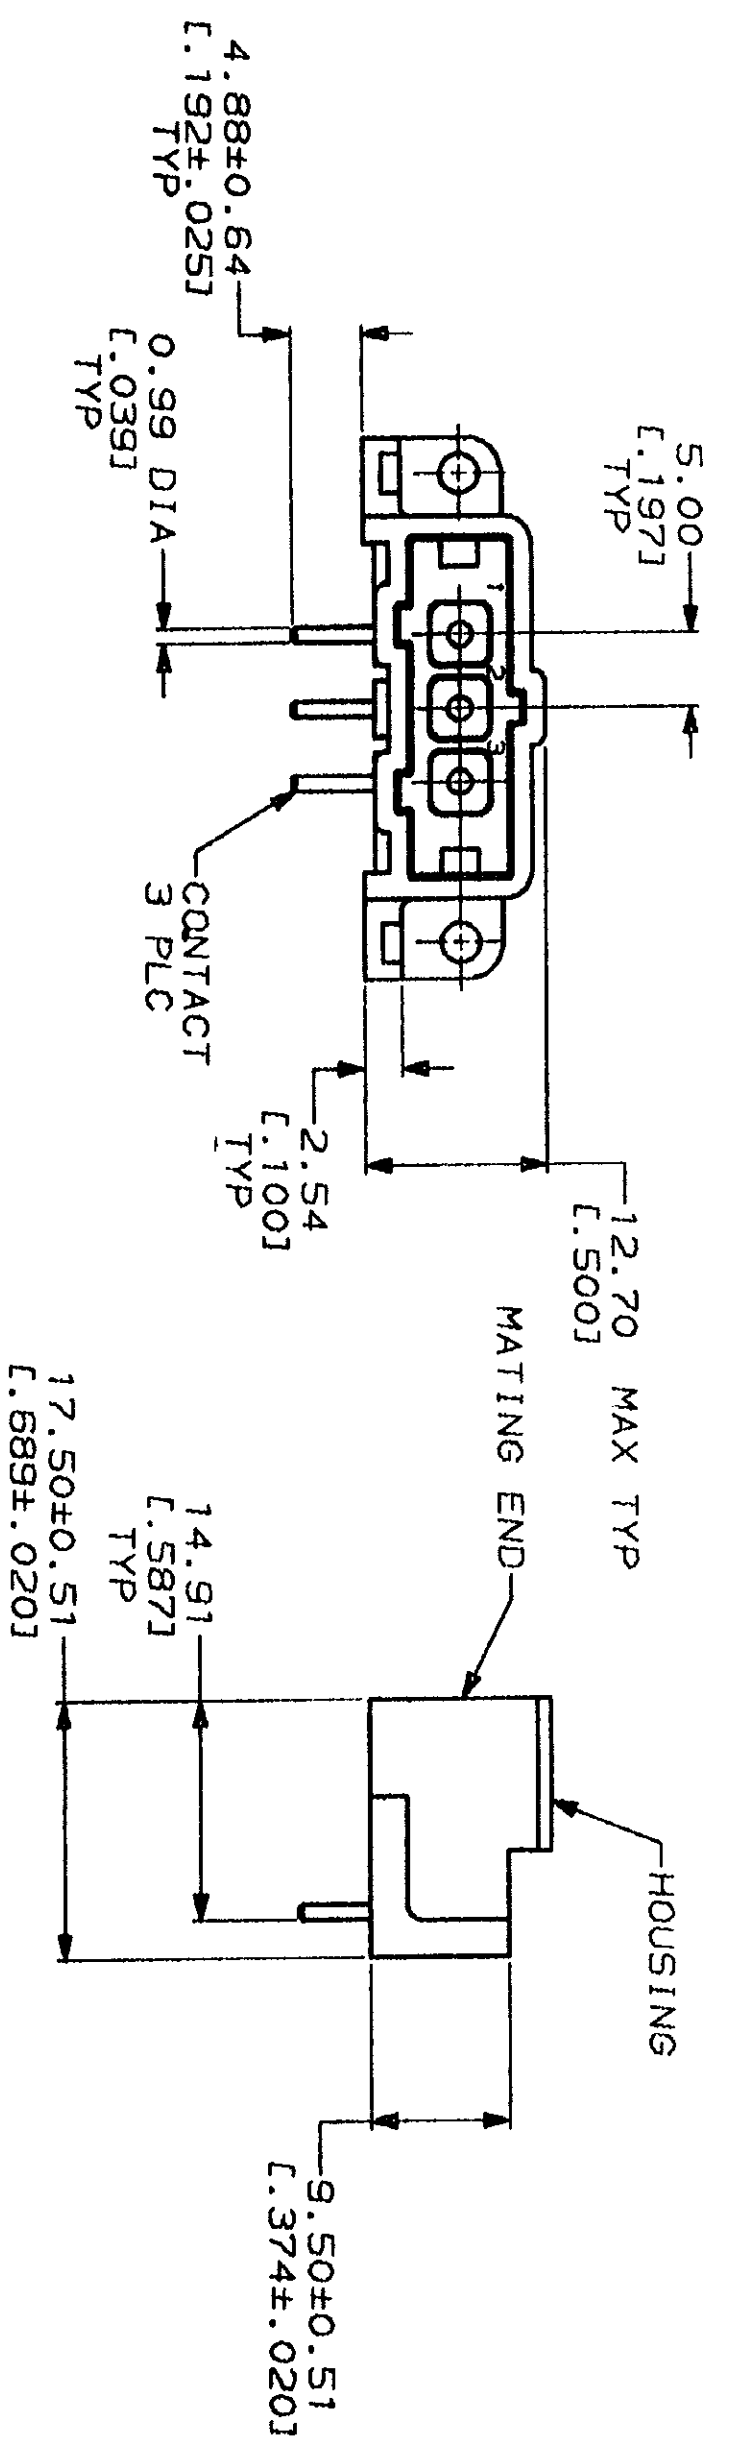

- 1 NYLON, RED.
- 2 BRASS PER ASTM B36.
- 3 3.81µm [L.000150] MIN TIN-LEAD OVER 2.54µm [L.000100] MIN COPPER OR 1.27µm [L.000050] MIN NICKEL.
- 4 0.76µm [L.000030] MIN GOLD FOR A LENGTH OF 5.08 [L.200] MIN FROM MATING END, 3.81µm [L.000150] MIN TIN-LEAD FOR A LENGTH OF 5.51 [L.217] MIN FROM OPPOSITE END, BOTH OVER 1.27µm [L.000050] MIN NICKEL.

|   |  |  |
|---|--|--|
| DO NOT SCALE PRINT.<br>UNLESS SPECIFIED<br>DIMENSIONS IN mm [INCHES]<br>TOLERANCES ON:<br>2 PLC DEC ± 0.25 [L.010]<br>3 PLC DEC ± 0.25 [L.010]<br>ANGLES<br>MATERIAL<br>HOUSING: <b>1</b><br>CONTACTS: <b>2</b> | DR 07/07/92<br>L. SIPE<br>CHK 7-24-92<br>R. STONE<br>APPD 7-24-92<br>A. TRAVIS | NAME<br><b>AMP</b><br>AMP Incorporated<br>Harrisburg, PA 17105-3609                        |
| FINISH<br>CONTACTS: SEE TABLE   | APPLICATION SPEC   | PIN HEADER ASSEMBLY, 3 POSN,<br>IN-LINE, RIGHT ANGLE, SMALL<br>METRIC CONNECTOR, METRIMATE |
| DR 07/07/92<br>L. SIPE<br>CHK 7-24-92<br>R. STONE<br>APPD 7-24-92<br>A. TRAVIS  | SCALE<br>2:1   | SIZE<br>CAGE CODE<br>00779   |
| DR 07/07/92<br>L. SIPE<br>CHK 7-24-92<br>R. STONE<br>APPD 7-24-92<br>A. TRAVIS  | SCALE<br>2:1   | DRAWING NO<br>207541   |
| DR 07/07/92<br>L. SIPE<br>CHK 7-24-92<br>R. STONE<br>APPD 7-24-92<br>A. TRAVIS  | SCALE<br>2:1   | SHEET<br>1 OF 1  |

|        |          |
|--------|----------|
| 4      | 207541-3 |
| 3      | 207541-1 |
| FINISH | PART NO  |

207541

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

CUSTOMER DRAWING