


## SMW7.3473K250K95TR12

Aliases (F126SM473K250V, SMW100HK5470KK95T1)

Obsolete

SMW/F126, Film, Metallized PPS, General Purpose, 0.047 uF, 10%, 160 VAC, 250 VDC, 125°C, 2824, 3.2mm

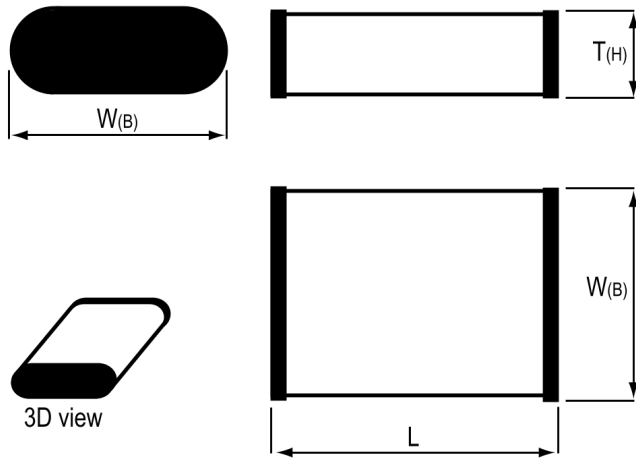

Note: '( )' correspond to the letters used in the product bulletin

### Dimensions

Chip Size	2824
L	7.3mm +/-0.4mm
W	6mm +/-0.4mm
T	3.2mm MAX
F	0.5mm NOM

### Packaging Specifications

Packaging	T&R
Packaging Quantity	2300

### General Information

Series	SMW/F126
Dielectric	Metallized PPS
Style	SMD Chip
Features	High Stability
RoHS	Yes
AEC-Q200	No

### Specifications

Capacitance	0.047 uF
Capacitance Tolerance	10%
Voltage AC	160 VAC
Voltage DC	250 VDC
Temperature Range	-55/+125°C
Rated Temperature	125°C
Dissipation Factor	0.15% 1kHz, 0.25% 10kHz, 0.5% 100kHz
Insulation Resistance	30 GOhms
Max dV/dt	15 V/us