

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Power cable, 3-position, PVC, black, free cable end, on Socket angled M12, S-coded, cable length: 10 m, for AC current up to 16 A/230 V

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: AC connectors for up to 16 A and 230 V AC
- ✓ Protection against incorrect connection using special S-coding

Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 937429 |
| GTIN | 4046356937429 |

Technical data

Dimensions

| | |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket) |
| Degree of protection | IP67 |

General

| | |
|-----------------------|----------------------|
| Rated current at 40°C | 16 A |
| Rated voltage | 230 V AC 230 V DC |
| Number of positions | 3 |
| Color handle area | black |
| Insulation resistance | ≥ 100 MΩ |
| Coding | S power |

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651

Technical data

General

| | |
|------------------------------|-------------------------------|
| Standards/regulations | M12 connector IEC 61076-2-111 |
| Status display | No |
| Protective circuit/component | unwired |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | > 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--|------------------------------|
| Flammability rating according to UL 94 | V0 |
| Contact material | CuZn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA |
| Material of grip body | PP |
| Material, knurls | Zinc die-cast, nickel-plated |

Standards and Regulations

| | |
|--|-----------------|
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-111 |
| Flammability rating according to UL 94 | V0 |

Cable

| | |
|---|--------------------------------|
| Cable type | PVC black |
| Cable type (abbreviation) | PVC |
| Cable abbreviation | LSYwYw-JZ |
| UL AWM style | 2517 (105 °C / 300 V) |
| Conductor cross section | 3x 1.5 mm ² |
| AWG power supply | 16 |
| Conductor structure, voltage supply | 30x 0.25 mm |
| Core diameter including insulation | 2.4 mm ±0.1 mm |
| Wire colors | black 1, black 2, green/yellow |
| Overall twist | 3 wires, twisted |
| External sheath, color | black |
| External cable diameter D | 6.8 mm ±0.2 mm |
| Minimum bending radius, fixed installation | 5 x D |
| Minimum bending radius, flexible installation | 12 x D |
| Cable weight | 80 kg/km |
| Outer sheath, material | PVC |
| Material conductor insulation | PVC |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 10 MΩ*km (at 20 °C) |
| Conductor resistance | ≤ 13.3 Ω/km (at 20 °C) |

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651

Technical data

Cable

| | |
|---------------------------------|--|
| Nominal voltage, cable | 300 V AC |
| Test voltage, cable | 2000 V AC |
| Flame resistance | according to IEC 60332-1 |
| | According to DIN EN 60332-1-2 |
| | According to VW-1 |
| | According to FT1 |
| Ambient temperature (operation) | -40 °C ... 90 °C (cable, fixed installation) |
| | -5 °C ... 90 °C (cable, flexible installation) |


Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

Drawings

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651


Schematic diagram

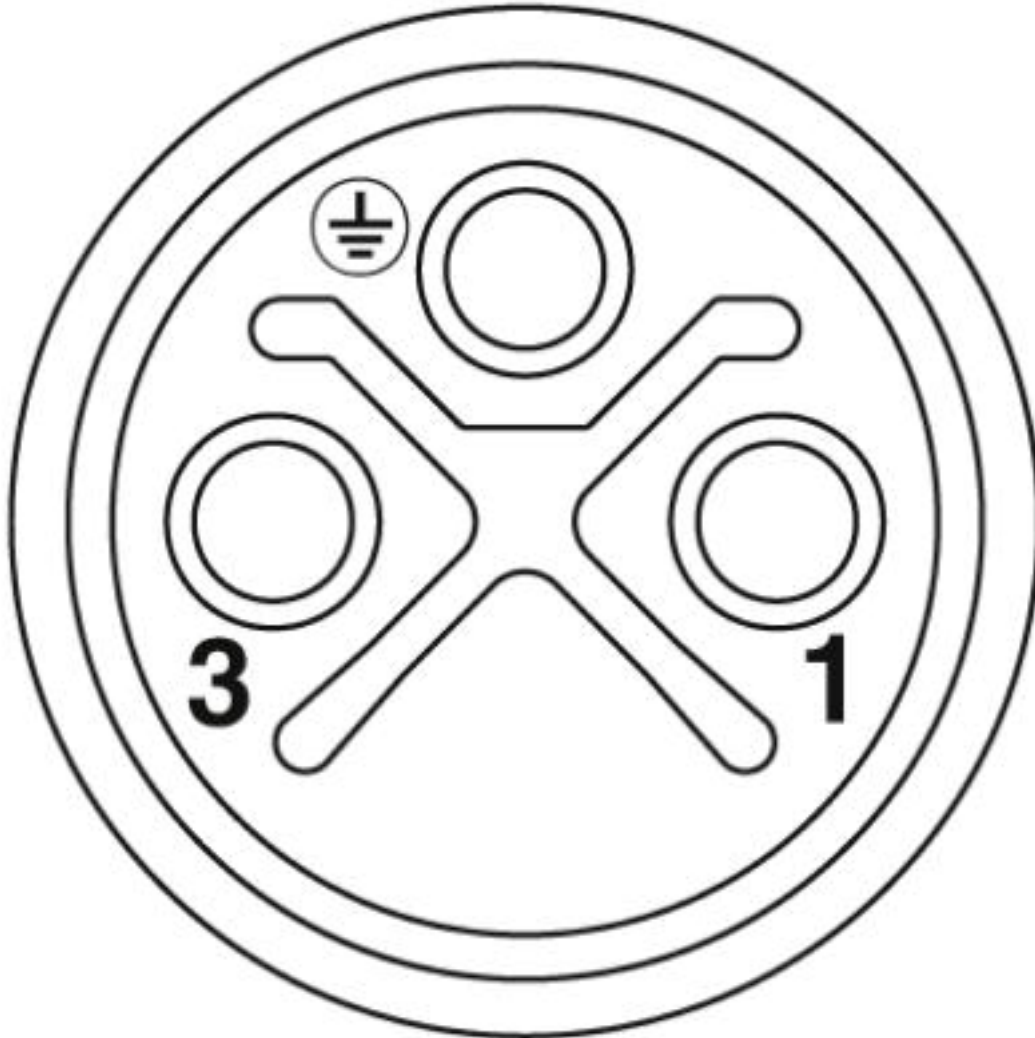

Pin assignment of M12 socket, 3-pos., S-coded, socket side view

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651


Dimensional drawing

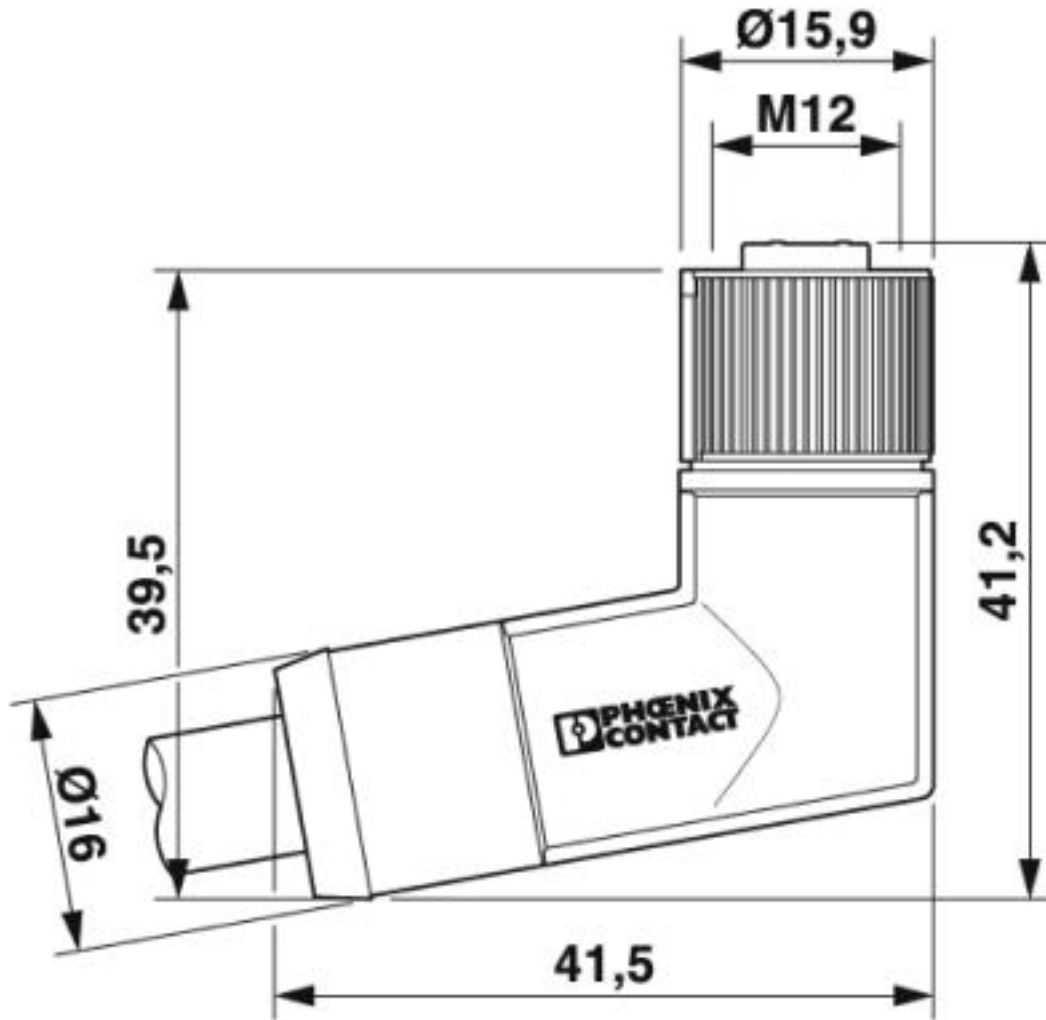

M12 x 1 socket, angled

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651

Cable cross section

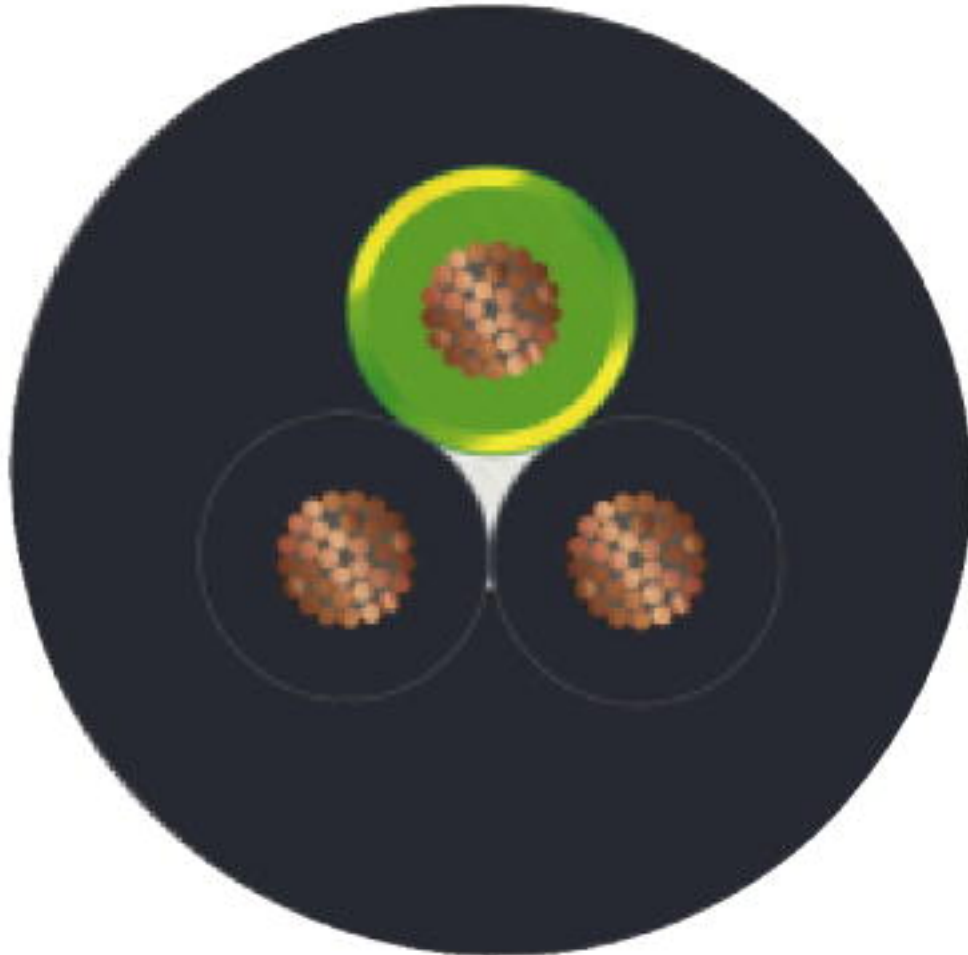

PVC black [PVC]

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / cULus Listed

Ex Approvals

Approval details

Power cable - SAC-3P-10,0-PVC/M12FRS PE - 1411651

Approvals

| | | | |
|----------------------------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 468743 |
| | | | |
| Nominal voltage UN | | 300 V | |
| Nominal current IN | | 12 A | |
| mm ² /AWG/kcmil | | 16 | |

| | | | |
|----------------------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 468743 |
| | | | |
| Nominal voltage UN | | 300 V | |
| Nominal current IN | | 12 A | |
| mm ² /AWG/kcmil | | 16 | |

| | | |
|-----|--|--------------------------|
| EAC | | RU C- DE.BL08.B.00286 |
|-----|--|--------------------------|

| | |
|--------------|--|
| cULus Listed | |
|--------------|--|

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>