

Miniature Fuse, 6.3 x 32 mm, Time-Lag T, UL, 250 VAC



UL 248-14 · 250 VAC · Time-Lag T

See below:

[Approvals and Compliances](#)**Description**

- UL Standard Fuse
- Glass Tube
- Last order date: 30.09.2021

**Weblinks**

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

**Technical Data**

Rated Voltage	125 - 250 VAC
Rated current	0.5 - 15 A
Breaking Capacity	35 A - 10 kA
Characteristic	Time-Lag T
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-55 °C to 125 °C
Climatic Category	055/085/21 acc. to IEC 60068-1
Material: Tube	Glass
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	2 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Rated current, Rated Voltage, Characteristic, Certification marks

**Approvals and Compliances**



Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

**Approvals**



The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: FST 6.3x32

Approval Logo	Certificates	Certification Body	Description
	<a href="#">UL Approvals</a>	UL	UL File Number: E42088
	<a href="#">CSA Approvals</a>	CSA	CSA Certification Record:


**Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
	Designed according to	UL 248-14	Low voltage fuses - Part 14: Additional fuses
	Designed according to	CSA22.2 No. 248.14	Low-Voltage Fuses - Part 14: Supplemental Fuses






## Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
	Designed for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements

## Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
	<a href="#">CE declaration of conformity</a>	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
	<a href="#">UKCA declaration of conformity</a>	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


## Dimension [mm]

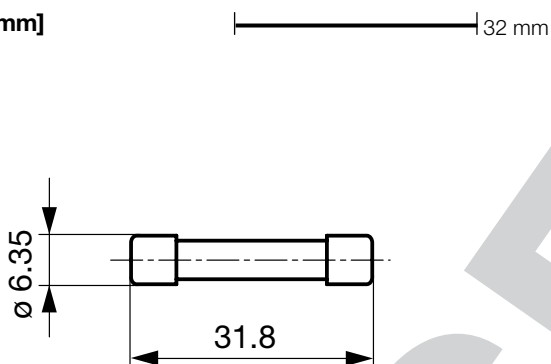

## Pre-Arcing Time

Rated Current In	1.1 x In min.	1.35 x In max.	2.0 x In min	2.0 x In max
0.5 A - 2 A	4 h	60 min	5 s	30 s
2.5 A - 20 A	4 h	60 min	5 s	30 s

Time-Current-Curves

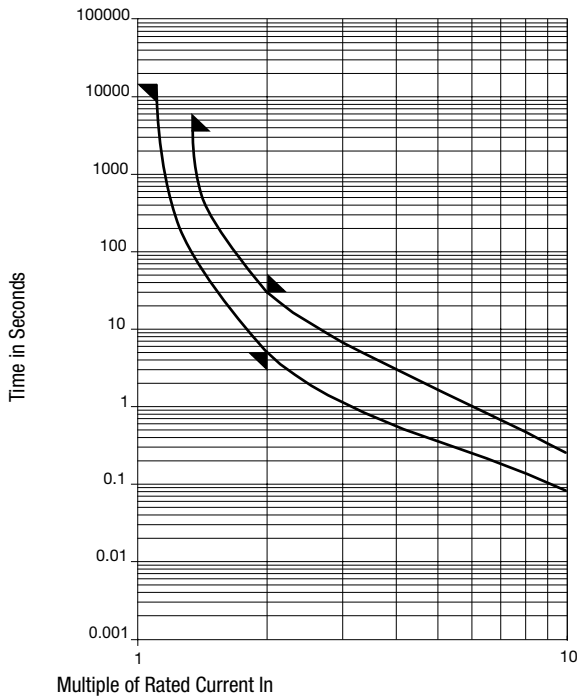

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 I <sub>n</sub> max. [mV]	Power Dissipation 1.1 I <sub>n</sub> typ. [mW]	Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s]	UL	SP	Order Number
0.5	250	1)	1125	1800	5.41	●	●	0034.5219
0.75	250	1)	931	2030	10.1	●	●	0034.5223
1	250	1)	750	2210	206	●	●	0034.5225
1.25	250	2)	537	2300	32.3	●	●	0034.5227
1.6	250	2)	450	2370	50	●	●	0034.5229
2	250	2)	427	2480	79	●	●	0034.5231
2.5	250	2)	359	2570	123	●	●	0034.5233
3	250	2)	325	2660	192	●	●	0034.5235
4	250	3)	286	2750	300	●	●	0034.5238
5	250	3)	270	2840	469	●	●	0034.5239
6	250	3)	180	1400	455	●	●	0034.5240
6.25	250	3)	180	1400	455	●	●	0034.5241
7	250	3)	156	1470	592	●	●	0034.5243
8	250	3)	140	1530	769	●	●	0034.5244
10	125	4)	91	2700	1300	●	●	0034.5245
12	125	4)	90	3300	2031	●	●	0034.5246
15	125	4)	90	4500	3377	●	●	0034.5247

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

- 1) 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 35 A @ 250 VAC, p.f. = 0.7 - 0.8
- 2) 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 100 A @ 250 VAC, p.f. = 0.7 - 0.8
- 3) 10 kA @ 125 VAC, p.f. = 0.7 - 0.8 / 200 A @ 250 VAC, p.f. = 0.7 - 0.8
- 4) 10 kA @ 125 VAC, p.f. = 0.7 - 0.8

Packaging Unit

Small Box Pack (10 pcs.)

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.