

MATERIALS AND FINISHES

4.3-10 PLUG CONNECTOR  
SEE SD-73162-680

SHRINK TUBE: PE

CABLE: FLEXIFORM 401 FJ

LABEL: PET

(ALL MATERIAL COMPLIANT RoHS)

PERFORMANCE REQUIREMENTS

FREQUENCY RANGE: 0-3GHz

WITHSTAND VOLTAGE(AC): 1500V @0.5mA

RETURN LOSS: ≤-25dB(690-2700MHz),

PIM3(2x43dBm): ≤-160dBc @700MHz/1800MHz/2600MHz


WATER-PROOF: IP68 (WHEN MATED)

NOTE 1:

PACKAGING BY PLASTIC BAG

NOTE 2:

CABLES SHIPPED WITH POLYETHYLENE DUST CAPS ON CONNECTORS

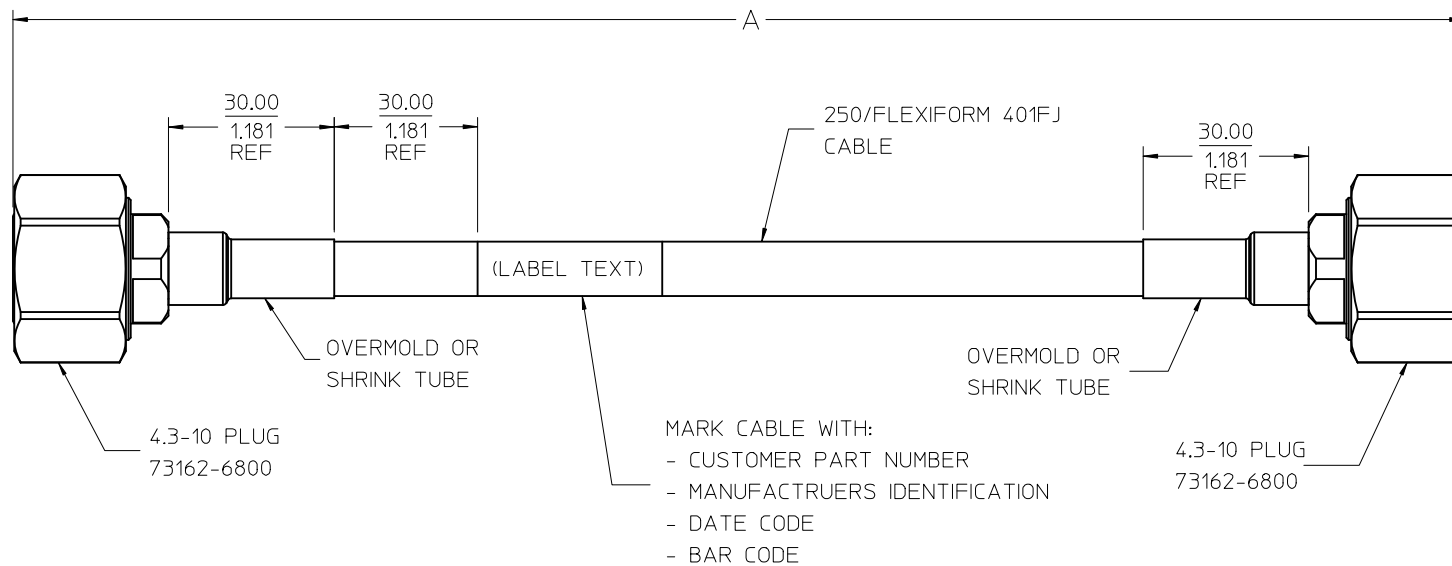

73135-6691	7.795±.118	198.00±3.00	09-142-01
73135-6690	10.630±.118	270.00±3.00	09-141-01
PART NO.	IN	MM	LABEL TEXT/CUSTOMER PN.
A			

IEC61169-54		4.3-10 INTERFACE	
SPECIFICATION		DESCRIPTION	
DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC
DRAWN BY YHUANG11		DATE 2016/07/04	TITLE CA, 4.3-10 PLUG STR WITH 250/401 FJ CABLE CA-4.3-10, 50 OHMS
CHECKED BY		DATE	<b>molex</b>
APPROVED BY MYE08		DATE 2016/08/01	
MATERIAL NO.		DOCUMENT NO.	SHEET NO.
SEE TABLE		SD-73135-669	1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

CHG: NEW RELEASE PER PDR1606975 EC NO: URF2017-0042 DRAWN: YHUANG11 2016/07/04 CHKD: APPR: MYE08 2016/08/01 DESCRIPTION REV A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM/IN		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	▽=0	4 PLACES ± --- ± ---	mm	INCH	TITLE		
	▽=0	3 PLACES ± --- ± ---			DRAWN BY YHUANG11	DATE 2016/07/04	
	▽=0	2 PLACES ± --- ± ---			CHECKED BY	DATE	
		1 PLACE ± --- ± ---			APPROVED BY MYE08	DATE 2016/08/01	
		0 PLACE ± --- ± ---			ANGULAR ± 2 °		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							