



NOTES

- 1. QUANTITY OF CONNECTORS : 1,600PCS/REEL
- 2. LEAD LENGTH

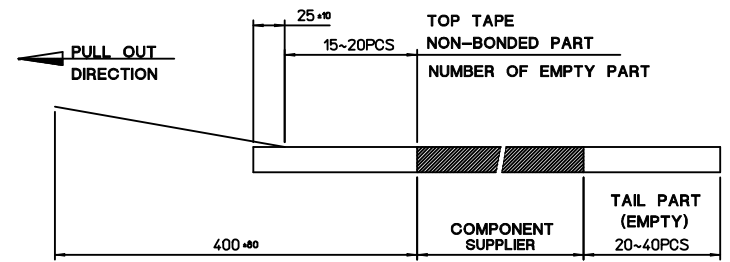

- 3. PEELING OFF FORCE OF COVER TAPE : 0.1N~0.59N(10.2GF~60GF)  
(PEELING DIRECTION AS SHOW IN FOLLOW FIG.)  
- PEELING OFF SPEED : 300mm/Min.(Ref.)



PROPOSAL-REVISED EC NO: KOR2016-0045 DRWN: IHYOU 2015/11/24 CHKD: APPR: YSK1M02 2015/11/30	DESCRIPTION A	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		▼=0 ▽=0	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± 0.25 ± --- 0 PLACE ± --- ± ---	MM ONLY	2/1	METRIC	☉ □ THIRD ANGLE PROJECTION
		ANGULAR ± 1 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY DATE IHYOU 2014/08/21 CHECKED BY DATE SHCHU APPROVED BY DATE YSK1M02 2015/10/16	TITLE	NANOSIM SOCKET 6P, 1.45H, BAR-PUSH W-DT & TRAY TYPE <b>molex</b>		
		ENTER PART SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	MATERIAL NO. SD-104257-001 DOCUMENT NO.	SHEET NO. 3 OF 3			