

---

## Product Change Notification (PCN)

---

Issue Date: 12/12/2014  
Modification/Revision Date: 12/12/2014

### IDC

Change Notification: **PCN-US-20141231-IDC**

Description of changes: **Change of Production Location  
Change of New Tools  
Change of Part Numbers**

1. Amendment of the specification
2. Current Rating: new: 1.5AMP
3. Insulation Resistance: new: 1000MΩ min
4. Operation Temperature: new: -40°C to +105°C
5. Contact Material: new: Brass
6. Change of dimensions, see sheet 3
7. Listed drawing # replaces all prior drawings, see sheet 2

Date of change and Implementation: **Change: 12/12/2014**

Key Characteristics of Change: **Change of part number**

Products Affected: **AWHW2-26G-SMD-R**

Reason for Change: **Part number unification**

Response: **No response to this notification is required.**

Issue Date: 12/12/2014  
Modification/Revision Date: 12/12/2014

---

## Product Change Notification (PCN)

---

**Reference Documents / Attachments:**


**Document: Drawing**

Previous part number	New part number	Drawing number
AWHW2-26G-SMD-R	AWHW-26G-SMD-200	ASS_2319_COrev03

**Issue Date:** 12/12/2014  
**Modification/Revision Date:** 12/12/2014


## Product Change Notification (PCN)

**AWHW2-26G-SMD-R**  
Old Version

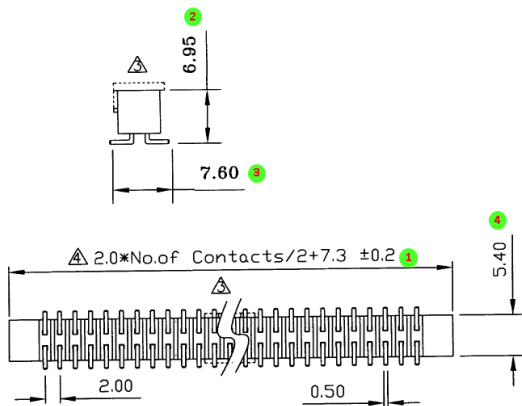

- 1)  $+7.3 \pm 0.2$
- 2) 6.95
- 3) 7.60
- 4) 5.40

**AWHW-26G-SMD-200**  
New Version

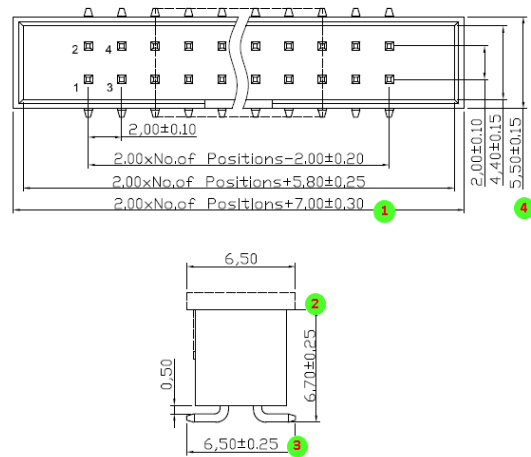

- 1)  $+7.00 \pm 0.30$
- 2) 6.70
- 3) 6.50
- 4) 5.50