

NOTES:

- 1. MATERIAL: SEE TABLE
- 2. FINISHES: SEE TABLE
- 3. ELECTRICAL SPECIFICATIONS
VOLTAGE RATING: 30VAC
CURRENT RATING: 1.5 AMPS

CABLE P/N MATRIX


E66A06017MXXX

CONNECTOR TYPE
(DBL ENDED RJ45)

PLUG TO RJ45 PLUG

CABLE TYPE
(22 AWG 2PAIR PLTC)

FINISHED LENGTH
M001 = 0.1M
M010 = 1.0M
M100 = 10.0M

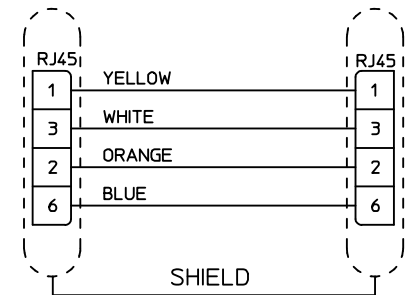

WIRING DIAGRAM

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	WRAP LABEL	VINYL	BLACK/YELLOW
3	1	RJ45 BOOT	PVC	BLACK
2	1	RJ45 PLUG	PC SHELL, BRASS CONT	CLEAR, GOLD PLT
1	1	CABLE, PROFINET, 2PR, 22 AWG, SHLD, PLTC	TPE JACKET	GREEN

RELEASED
EC NO: IPG2016-0528
DRW:RSTONE 2015/10/08
CHKD:KJOZWIK
APPR:BWODMAN 2015/10/12

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± .005	± .0005
3 PLACES ± .002	± .0002
2 PLACES ± .001	± .0001
1 PLACE ± 0.3	± .012
0 PLACE ± .005	± .0005

ANGULAR ± 1°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	
IN	MM
DRAWN BY RSTONE	DATE 2015/10/08
CHECKED BY KJOZWIK	DATE
APPROVED BY BWODMAN	DATE 2015/10/12
MATERIAL NO.	
SIZE B	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
1:1	INCH	⊙
TITLE RJ45 CABLE ASSY RJ45 PLUG TO RJ45 PLUG 22 AWG, 2 PAIR PLTC		
molex		
DOCUMENT NO. SD-120108-093	SHEET NO. 1 OF 1	