

- Specification:
- 1.Operation Temperature: -40°C~85°C.
  - 2.Insulation Resistance:100MΩ At DC500V.
  - 3.Contact Resistance:<30mΩ.
  - 4.Waterproof:IP67.
  - 5.Mating Cycles:500 cycles.
  - 6.Seal Nut:Nylon, Black
  - 7.Gasket:Silicon, Gray.
  - 8.Socket Housing:Nylon, Black
  - 9.Baffle:Nylon, Black
  - 10.Shield Sheet : Ni Plated
  - 11.RoHS Compliant.

REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	Initial Drawing	LiYongSheng	2020/04/29

UNIT: mm

DESCRIPTION: RJ45 Quick plug

TOLERANCE  
X ±0.25  
XX ±0.15  
XXX ±0.05  
ANGLES ±1°


SCALE: 1:1

REV: C1

SIZE: A4

SHEET: X OF X

\* : Inspection Item

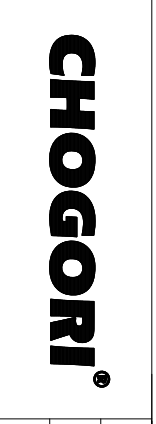

PART NO: 33008635-02

DWG NO: [Blank]

CUSTOMER: Panson

DRAWN BY: LiYongSheng

CHECKED BY: Allen

APPROVED BY: Panson

DATE: 2020/04/29

DATE: 2020/04/29

DATE: 2020/04/29