



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-010245	08-05-14	DM	DM
	A1	REVISED PER PCN E-20-005835	21APR2020	AP	IG

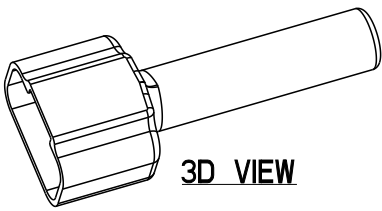

3D VIEW

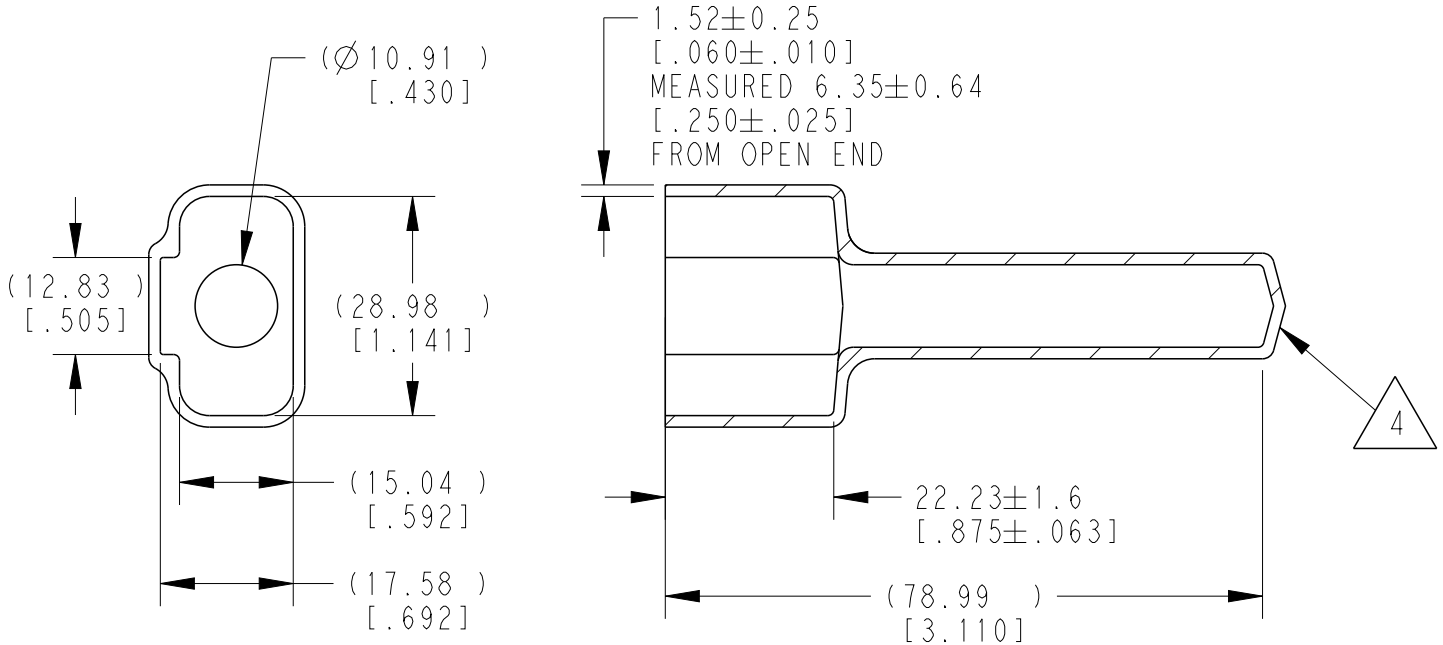

5. SMALL NON-FILLS ARE ACCEPTABLE INSIDE OF PART, INCLUDING SUPPLIER MARKING.

4. SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND. WALL THICKNESS ON THIS END MAY VARY.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROL. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO $+100^{\circ}\text{C}$ [-20°F TO $+212^{\circ}\text{F}$]

1. THIS PART IS USED ON DTM04-12PX (X=A,B,C,D) RECEPTACLES WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DTM12P-BT-BK	DTM21P-BT-BK

© 2020 TE Connectivity. All Rights Reserved.

DIMENSIONS: MM [INCH]	DWN D. MEYER	05AUG2014	MATERIAL	PVC	FINISH	BLACK
	CHK B. MILLIGAN	05AUG2014				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. MEYER	05AUG2014				
0 PLC ±	PRODUCT SPEC		NAME BOOT, RECEPTACLE, 12PIN DTM SERIES			
1 PLC ±	APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ±			A 4	00779	©-DTM12P-BT-BK	-
3 PLC ±			WEIGHT 10.00 g			
4 PLC ±			CUSTOMER DRAWING			
ANGLES ±			SCALE	1:1	SHEET	1 OF 1
			REV A1			