


**SKINDICHT® SM/SM-M**

Nickel-plated brass locknuts for NPT, PG &amp; metric strain relief cable glands

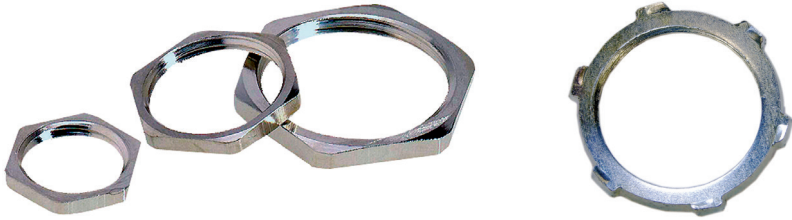

SKINDICHT® SM locknuts are required wherever NPT, PG or metric cable glands must be fastened to a housing, and tapped holes cannot be provided.

**Technical data**

**Material:**  
 - NPT: stamped steel  
 - PG & metric: nickel-plated brass

**Temperature range:** -20°C to +100°C

**Approvals**

## NPT

Part number	Size	Wrenching flats	Nut thickness in	Pack size
811092*	NPT 3/8"	0.945	0.138	100
811093	NPT 1/2"	1.102	0.157	100
811094	NPT 3/4"	1.378	0.157	50
811095	NPT 1"	1.693	0.157	50

\*Product features a hex design

## PG

Part number	Size	Wrenching flats	Nut thickness in	Pack size
52003490	PG 7	0.591	0.110	100
52003500	PG 9	0.709	0.110	100
52003510	PG 11	0.827	0.118	100
52003520	PG 13	0.906	0.118	100
52003530	PG 16	1.024	0.118	100
52003540	PG 21	1.260	0.138	50
52003550	PG 29	1.614	0.138	50
52003560	PG 36	2.009	0.197	25
52003570	PG 42	2.364	0.197	25
52003580	PG 48	2.521	0.216	25

## metric

Part number	Size	Wrenching flats	Nut thickness in	Pack size
52103000	M12 x 1.5	0.591	0.118	100
52103010	M16 x 1.5	0.748	0.118	100
52103020	M20 x 1.5	0.945	0.138	100
52103030	M25 x 1.5	1.182	0.157	100
52103040	M32 x 1.5	1.418	0.157	100
52103050	M40 x 1.5	1.812	0.197	50
52103060	M50 x 1.5	2.364	0.197	50
52103070	M63 x 1.5	2.758	0.197	25
52103071	M75 x 1.5	3.349	0.315	5
52103072	M90 x 2.0	4.018	0.394	1
52103073	M110 x 2.0	4.885	0.472	1