

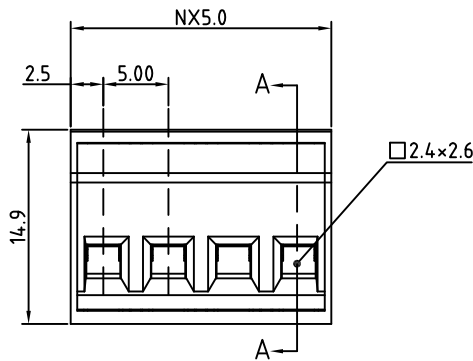


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	CUL approval added	Lee

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

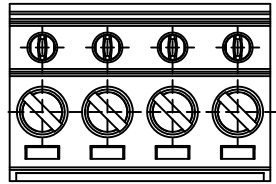

N=Number of poles

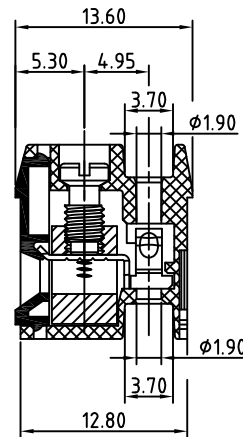

SECTION A-A

Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating M3
- Terminal body(house) Brass, Ni plated
- Wire guard PhBz , Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 4.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- △ ● Safety Approval: us

RoHS Compliant

PART NUMBER:

OSTEOXX0100

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02: 2 Poles | 0: Black (Standard) |
| : | 5: Green |
| : | 6: Blue |
| 24: 24 Poles | 8: Grey |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTEO 5.0 series (A type ϕ 1.90mm)				
PART NO.	OSTEOXX0100	DWG NO.	OSTEOXX0100.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		Aaron 2009.02.23	Aaron 2009.02.23		X. \pm 0.50	
				SHEET: 01/01	X.X \pm 0.30	
				REV: C	X.XX \pm 0.10	
					X° \pm 1°	