



896-940 MHz Unity Gain Omnidirectional Antenna FG8960

FIBERGLASS BASE STATION ANTENNAS FEATURE INDUSTRY LEADING DESIGN COMPONENTS THAT PERFORM IN EXTREME CONDITIONS

The Laird FG8960 fiberglass omnidirectional base station antenna is a convenient and highly durable solution for base station or micro base station applications. It features superior quality design through heavy wall gold anodized aluminum mounting sleeve and a highly polished white UV treated fiberglass radome.

FEATURES

- High performance
- 100% tested on a network analyzer before shipping
- Special UV protection coating resist sun damage
- Easy installation with optional FM2SP Mount Kit
- N Female industry standard connector

MARKETS

- Omnidirectional outdoor antenna applications used in commercial, public safety, and government applications around the globe
- Typical applications include land based and marine radio and voice and data transmission


SPECIFICATIONS

Part Number	FG8960
Frequency Range (MHz)	896 - 940 MHz
Nominal Gain	0 dBd
VSWR	<2.0:1
Maximum Power	100 watts
Nominal Impedance	50 Ohm
Polarization	Vertical
Pattern	Omni-Directional
Half-Power Beamwidth	110° x 360° (E1° x Az°)
Termination	N-Female
Height	13 3/8 in (34.28 cm)
Diameter	1.31 in (3.30 cm)
Weight	0.65 lbs (0.29 kg)

SPECIFICATIONS

Rated Wind Velocity	125 mph (210 kph)
Rated Wind Velocity w/0.5" radial ice	85 mph (137 kph)
Wind Resistance	0.1217 sq. ft.

ANTENNA RADIATION PATTERN

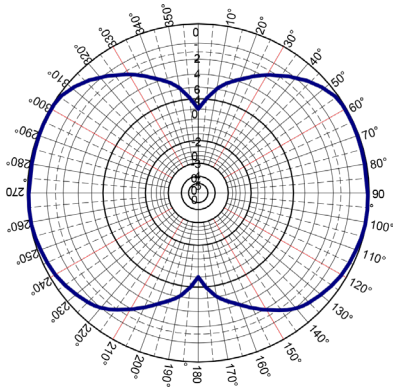

Elevation Pattern (Y, Z or H-plane)
Normalized to OdBd



Lightning Arrestor LABH350NN
(Sold Separately)



Lightning Arrestor LABH350NN
(Sold Separately)

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

©2021 TE Connectivity. All Rights Reserved.

11/21 Original

