
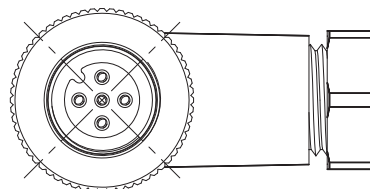



Specifications:
 Current Rating:4A
 Voltage Rating:250V AC/DC
 Contact Resistance:10m ohm. Max.
 Insulation Resistance:100M ohm. Min.
 Operating Temperature Range:-25°C ~ +85°C



Material and Finish
 Insulator:Nylon (UL94V-0)
 Contact:Brass,Gold Plated
 Coupling Screw:Brass,Nickel Plated
 Outer Shell:Nylon Black
 Mechanical Performance
 Waterproof Rate:IP67
 Application Cable OD:4~6mm

How to Order
 M12-R-XXS-A-AE4

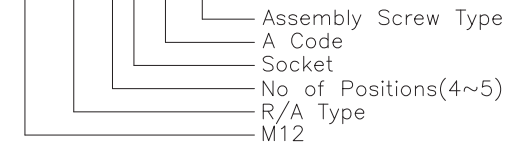

Pin Assignments Front View



				DRAWN: Joy Liu	GENERAL TOLERANCE: .X=±0.30 .XX=±0.25	 ON-SHORE TECHNOLOGY, INC.
E				CHECKED: Andrew	UNIT: MM	
D				APPROVAL: Bill He	SCALE: 1:1	DESCRIPTION: M12 4PIN SOCKET A CODE R/A ASSEMBLY SCREW TYPE
C					SHEET: 1/1	PART NO: M12-R-XXS-A-AE4
B				PROJECTION: 		
A	14-Feb-2020		Joy Liu			
REV	DATE	FILE	BY			