

Contactors

4-Pole Contactors – Series K3-10.. to K3-151..



Ratings		Rated	Aux. Contacts		Type	Coil voltage ²⁾		AC or DC operated	
AC2	AC1	Current	Built-in	Additional					
380V		AC1	see page 52			24	24V 50/60Hz	AC or DC operated	
400V						110	110V 50/60Hz		
415V 400V		690V				230	220-240V 50Hz		
415V 400V		690V				400	380-415V 50Hz		
						= 24	24V= DC ³⁾		
kW	A		NO NC Type			↓	Pack Weight	Wiring Diagram pcs.	
							kg/pc.		
4	17,5	25	-	-	max. 4 ³⁾	K3-10NA00-40 ... ³⁾	1	0,23	A00-40
4	17,5	25	-	-	HN.. or HA..	K3-10NA00-22 ... ³⁾	1	0,23	
4	17,5	25	-	-	and 2 HB..	K3-10NA00-04 ... ³⁾	1	0,23	
5,5	17,5	25	-	-		K3-14NA00-40 ... ³⁾	1	0,23	
5,5	17,5	25	-	-		K3-14NA00-22 ... ³⁾	1	0,23	
5,5	17,5	25	-	-		K3-14NA00-04 ... ³⁾	1	0,23	
7,5	22	32	-	-		K3-18NA00-40 ... ³⁾	1	0,23	
7,5	22	32	-	-		K3-18NA00-22 ... ³⁾	1	0,23	
7,5	22	32	-	-		K3-18NA00-04 ... ³⁾	1	0,23	
11	22	32	-	-		K3-22NA00-40 ... ³⁾	1	0,23	
11	31	45	-	-	max. 4	K2-23A00-40 ... ³⁾	1	0,65	
15	34,5	50	-	-	HN..	K2-30A00-40 ... ³⁾	1	0,65	
18,5	34,5	50	-	-	or HA..	K2-37A00-40 ... ³⁾	1	0,65	
22	62	110	-	-	max. 6 ⁵⁾ HN..	K3-50A00-40 ... ⁵⁾	1	1,1	
30	69	120	-	-	or HA..	K3-62A00-40 ... ⁵⁾	1	1,1	
37	76	130	-	-	and 2 HB..	K3-74A00-40 ... ⁵⁾	1	1,1	
15	43	63	-	-	1 HKT.. +	K3-41A00-04 ... ³⁾	1	1,4	
15	43	63	-	-	2 HKA11	K3-41A00-22 ... ³⁾	1	1,4	
30	85	125	-	-		K3-96A00-04 ... ⁴⁾	1	2,42	
30	85	125	-	-		K3-96A00-22 ... ⁴⁾	1	2,42	
45	94	135	-	-		K3-96A00-40 ... ⁴⁾	1	2,42	
55	139	200	-	-		K3-116A00-40 ... ⁴⁾	1	4,7	
75	173	250	-	-		K3-151A00-40 ... ⁴⁾	1	4,7	
90	208	300	-	-		K3-176A00-40 ... ⁴⁾	1	4,7	
110	242	350	-	-		K3-210A00-40 ... ⁴⁾	1	8	
132	310	450	-	-		K3-260A00-40 ... ⁴⁾	1	8	
160	415	600	-	-		K3-316A00-40 ... ⁴⁾	1	8	

1) Other coil voltages on request

2) Coil voltage range and non-standard coil voltages see page 57

3) DC operated with dual-wound coil, max. 3 additional aux. contac

4) with integrated coil suppressor (AC/DC coil)

5) DC operated with dual-wound coil, max. 5 additional aux. contacts


Contactors

4-Pole Contactors – Series K3-10.. to K3-151..


Dimensions

Contactors 4-pole, AC operated / DC operated

K3-10NA00-40
K3-14NA00-40
K3-18NA00-40
K3-22NA00-40

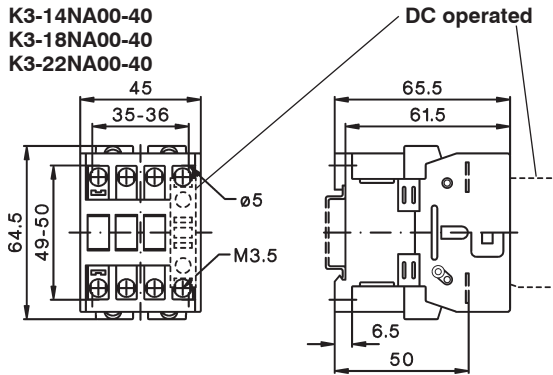


K2-23A00-40
K2-30A00-40
K2-37A00-40

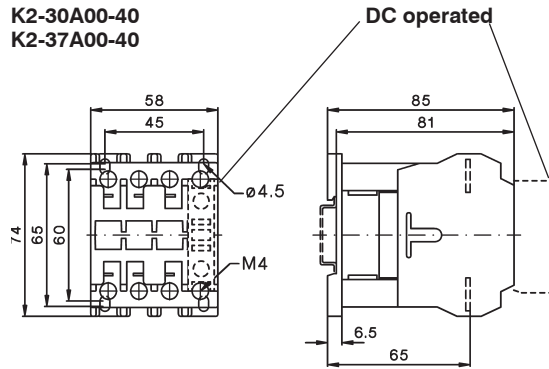


Contactors 4-pole, AC operated / DC operated


K3-50A00-40
K3-62A00-40
K3-74A00-40

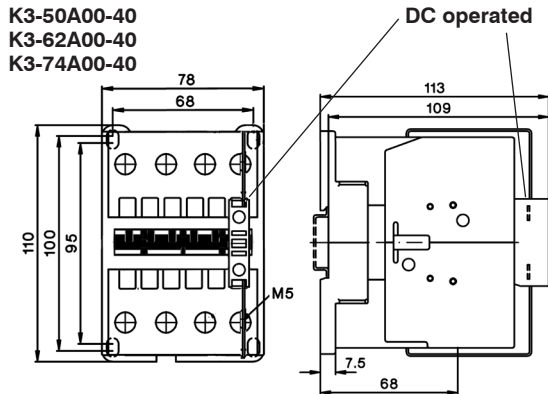


K3-41A00-40

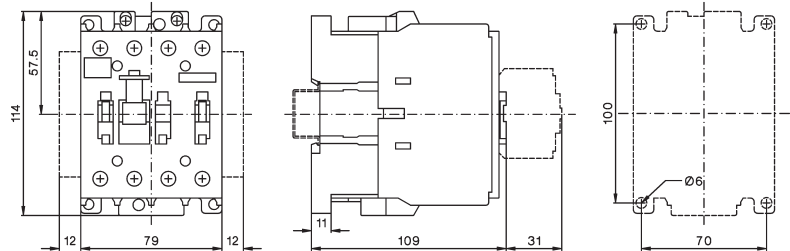

K3-96A00-40

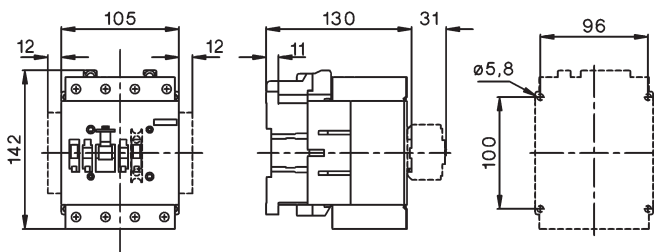

K3-116A00-40
K3-151A00-40

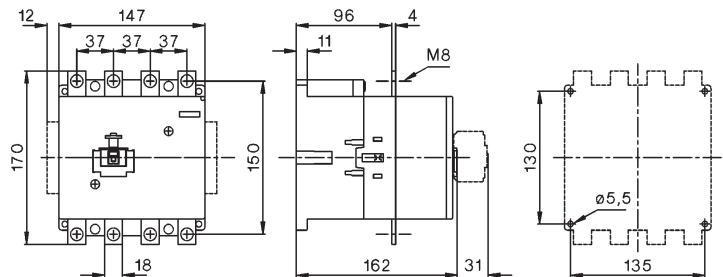


Contactors

4-Pole Contactors – Series K3-10.. to K3-151..

Contactors 4-pole, AC and DC operated

K3-210A00-40
K3-260A00-40
K3-316A00-40

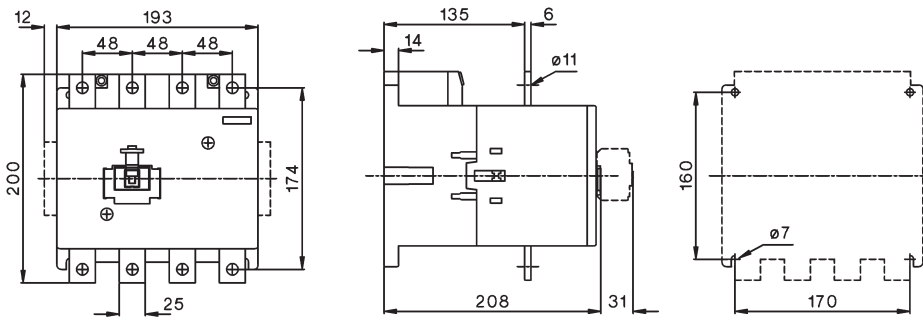

Please reference the full contactors catalog at www.bnj-usa.com for complete IEC and UL data and technical specifications. This datasheet is a subset of that information for product identification use.