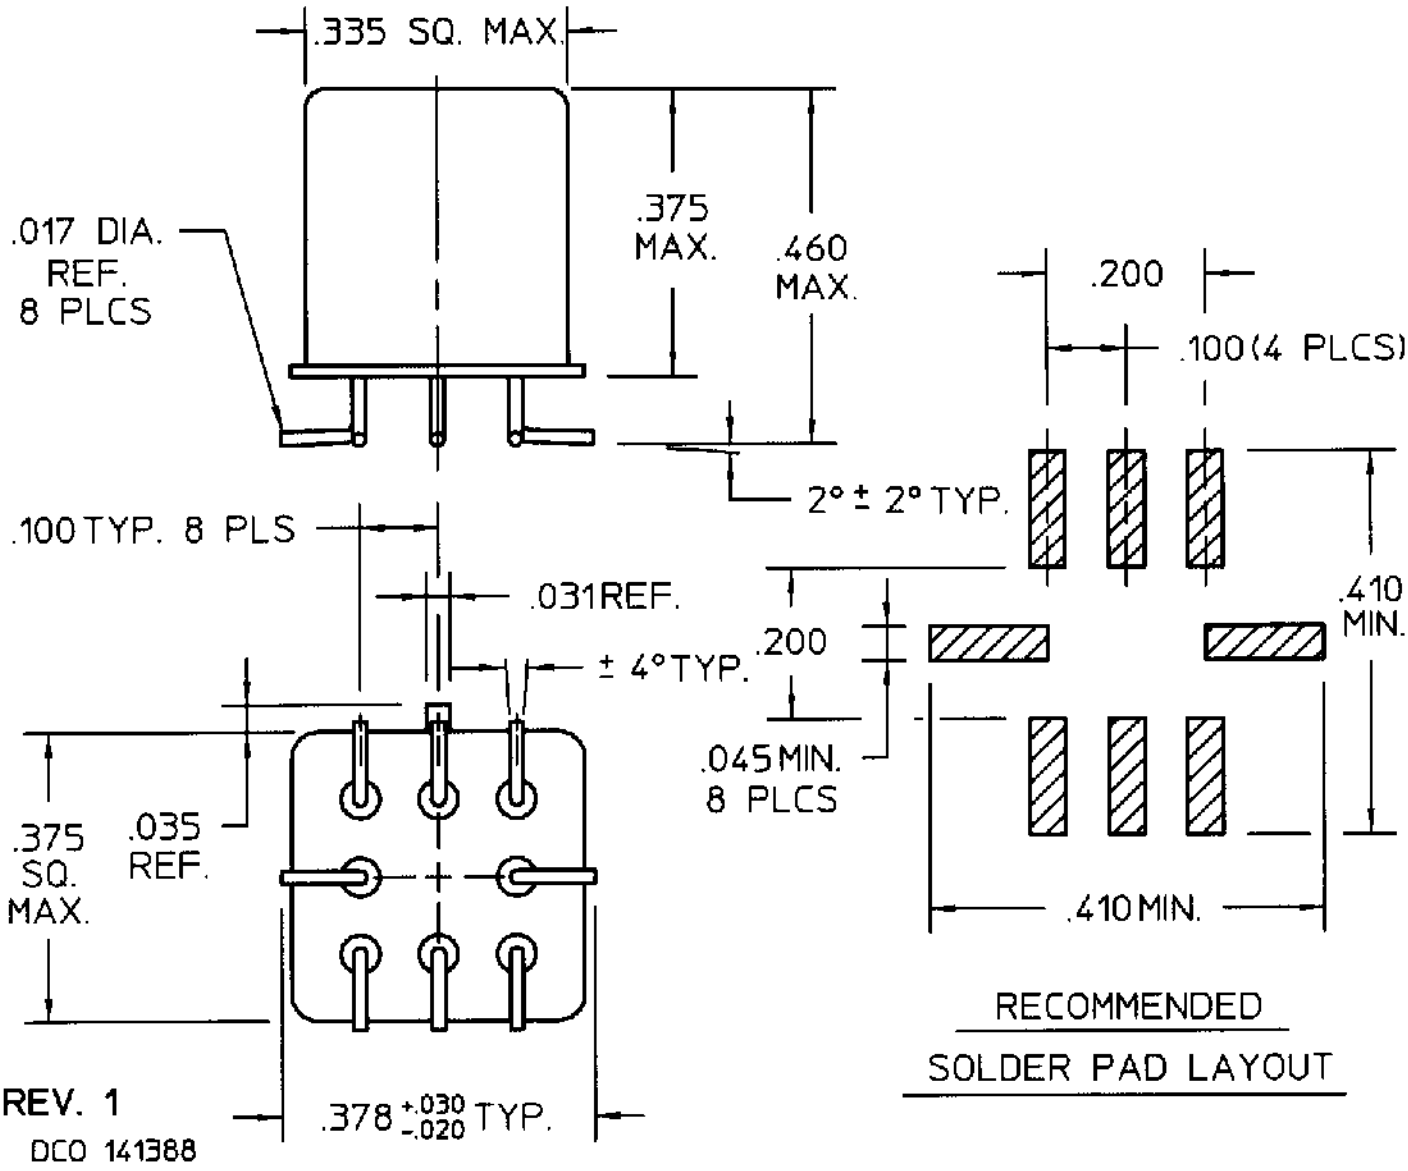

COIL: @ 25°C

RESISTANCE 3200 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 14.0 VDC

MUST RELEASE 8.0 VDC MAX. 1.37 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4.0 MS MAX.
RELEASE 7.5 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN.

DR. B.D. 9/20/99 CK. 9/23/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I.
CUST. NO. STANDARD REV.

SMGSD RELAY

SMGSD-26

F-718 REV 2