

1

2

3




4

5

6

7

LENGTH

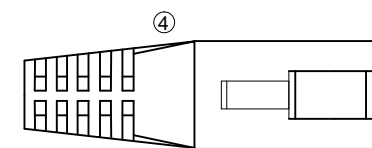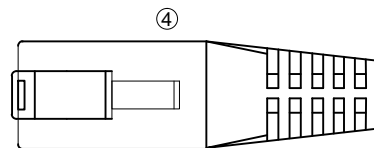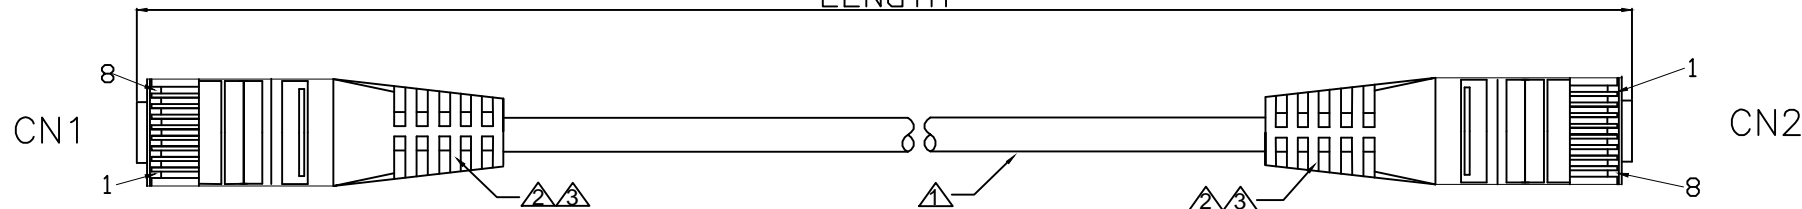

Order code: A-MCUP-80xxx Order color: Grey

Order code: A-MCUP-80xxx/x

Order color:

R: Red

Y: Yellow

G: Green


B: Blue

② BK:Black


Length Code	Length (M)
005	0.5
010	1
020	2
030	3
050	5
070	7
100	10
150	15
200	20
300	30

③ Tolerance

Length (M)	Max-M	Min-M
0.5	+0.03	-0.025
1	+0.04	-0.035
L≥2	+L x 3%	-L x 3%

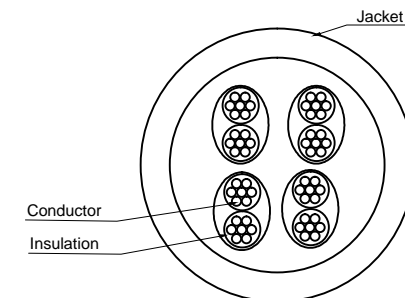

PIN OUT

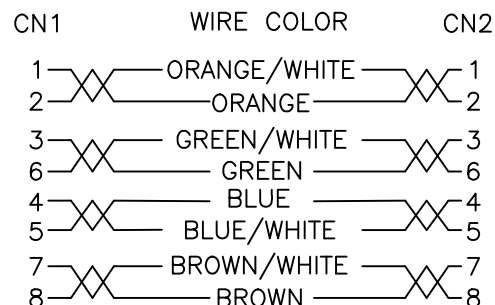

Electrical

Open/short/intermittence:100%

The operating temperature: -20°C~+60°C

The storage temperature: -20°C~+60°C

④	③	Molding PVC	2	Molding PVC 65P
④	②	RJ45 CONN	2	RJ45 8P8C, contacts 3u" gold-plated Un-shielded PC UL94V-2
④	①	CABLE	1	CAT 5E U/UTP(26AWGx1PR)*4+PVC Jacket OD:4.9±0.2mm
NO.	NAME.	Q'TY	SPECIFICATION	

RoHS compliant

Unit: mm

Scale	FREE					Date	Name	Customer-No.
TOLERANCE		④	Change the plant	12.04.2022	Luca	Drawn	25.05.2014	Joanna
		③	Clarify the tolerance	23.08.2018	Segal	Approved	12.04.2022	Luca
		②	Add the new P/N for black outer jacket	01.11.2017	Winnie			
DIM	TOL	①	Add the product type of length and color	04.08.2017	Fred			
		①	Drawn	25.05.2014	Joanna			
Angle	TOL	Id.	Modification	Date	Name			

Customer-No.

ASSMANN WSW-No.

A-MCUP-80xxx/x

Drawing-No.

ASS 7407 CA

rev04

Replace

Sheet

1

2

3

4

5

6

7

CAB0742