


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0805 X7R 220pF 50V(0805B221K500CT)

1. Dimension

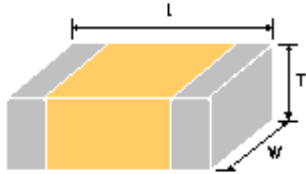

Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805 (2012)	2.00±0.15	1.25±0.10	0.80±0.10


2. Cap, DF, IR @25°C

(Cap, DF @ 1KHz, 1Vrms ; IR @ 50V, 120sec)

Item	Spec
Cap [pF]	220(±10%)
DF	≤ 2.5%
IR [G-ohm]	≥ 10

3. Impedance/ESR-Frequency


(Equipment: 4287A)

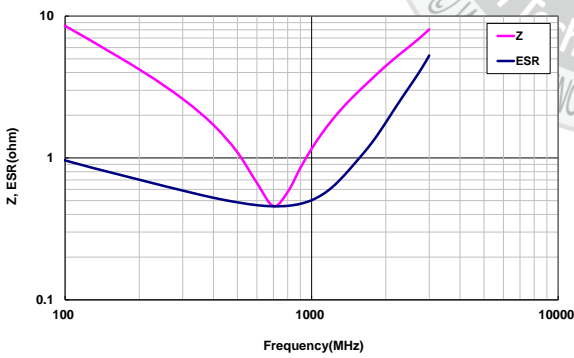

5. Capacitance – DC Voltage Characteristics


(Equipment: 4980A; DC charge 60±5sec)

25V : -0.76% ; 50V : -1.75%

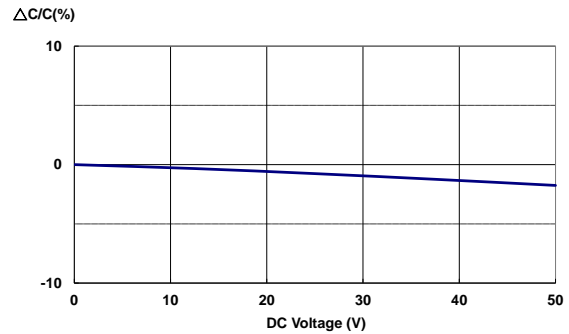


6. Capacitance – AC Voltage Characteristics

(Equipment: 4980A)

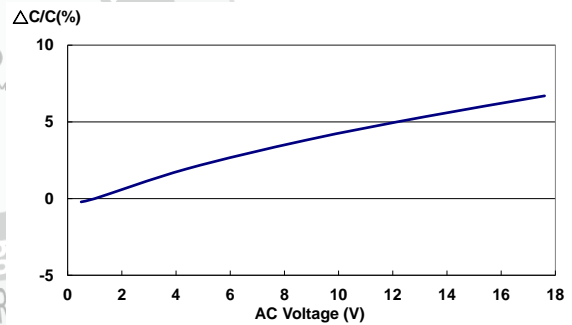

4. Capacitance – Temperature Characteristics

(Equipment: 4284A)

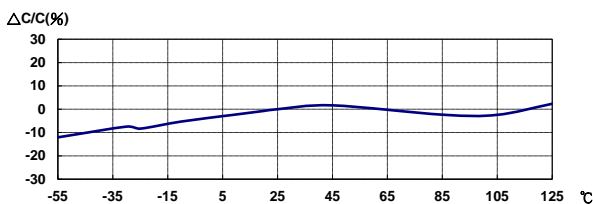

Last updated : 2019/07/22