

## Interface module - VIP-2/SC/D26F UHIO - 2905715

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE module with screw connection and female D-Subminiature Amplimate 0.050 series connector.

### Your advantages

- Metal foot
- Screw connection
- Screw connection



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 000640
GTIN	4055626000640

### Technical data

#### Dimensions

Width	49.7 mm
Height	65.5 mm
Depth	45.3 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Nominal voltage $U_N$	24 V AC/DC
Max. perm. current (per branch)	500 mA
Number of positions	26
Status display	No
Mounting position	any

# Interface module - VIP-2/SC/D26F UHIO - 2905715

## Technical data

### Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	24 ... 12

### Connection data 2

Connection name	Controller level
Connection method	D-SUB socket strip
Number of connections	1
Number of positions	26

### Standards and Regulations


Flammability rating according to UL 94	V0
--	----

### Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

## Drawings

Circuit diagram

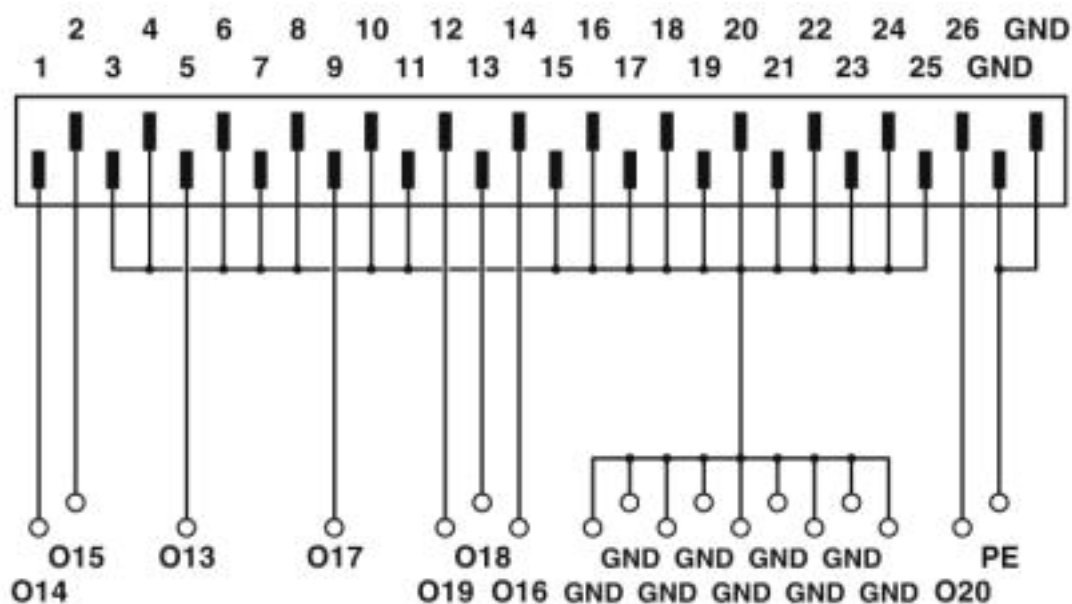

## Interface module - VIP-2/SC/D26F UHIO - 2905715

### Approvals

Approvals

---

Approvals


CSA

---

Ex Approvals

---

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	2122203
Nominal voltage UN		30 V	
Nominal current IN		0.5 A	
mm <sup>2</sup> /AWG/kcmil		28-12	

---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>