

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F



F

G

G

H

H

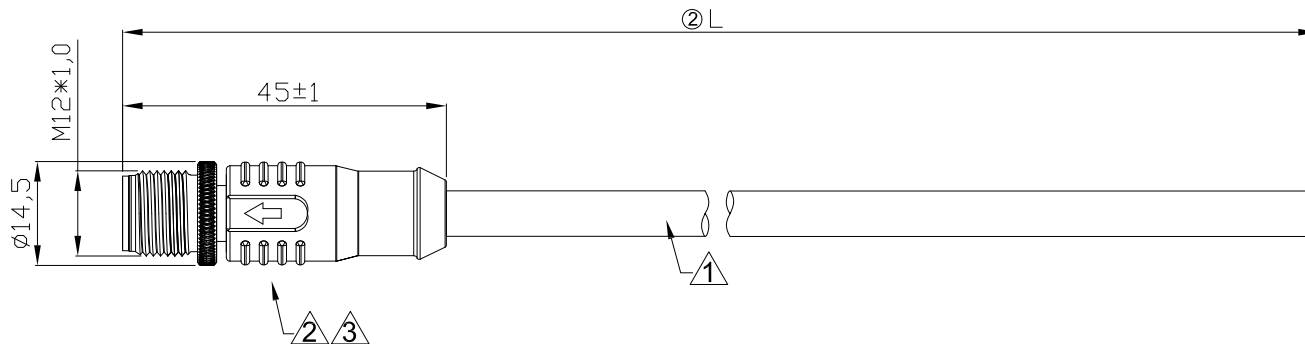

## Notes:

## Detailed Product Description:

1. Waterproof connector rating is IP67/IP68

2. Protected from dust and water during immersion, resistant to many oils and chemical etc.

## Other Specification:

3. Rating voltage: 250V AC/DC

4. Rating current: 4A

5. Insulation Resistance: &gt;100MΩ.

6. Contact Resistance of connector: ≤10mΩ.

7. Operating temperature: -25°C ~ +85°C.

## WIRE LIST

P1	PAIR	COLOR	P2
1	PAIR1	ORANGE	OPEN
2	PAIR2	WHITE	
3	PAIR1	YELLOW	
4	PAIR2	BLUE	
SHELL		BRAID	

② A-M12D04MOExxxx1GN00

L:

1000mm ±15mm

3000mm ±30mm

5000mm ±50mm

③	BLACK PUR	12	G
②	M12 D CODING 4 PIN MALE CONNECTOR WITH SHIELD	1	SET
①	UL20549 CAT5 24AWG*2P+BD JACKET GREEN FR-TPU OD=6.4mm	1	PCS
ITEM	SPECIFICATION	Q'TY	UNIT

RoHS compliant

Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	21.11.2018	Segal
.X	±0.5					Approved	15.08.2019	Amy
.XX	±0.20							
		②	Update the cable length	15.08.2019	Segal			ASSMANN WSW-No. ②① A-M12D04MOExxxx1GN00
DIM	TOL	①	Update the P/N	26.01.2019	Segal			Drawing-No. ASS 8416 CA
X.	±2.0°	①	Drawn	21.11.2018	Segal			rev02
.X	±1.0°	①						
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	

1

2

3

4

5

6

7