



PACKAGE: INDIVIDUAL PE BAG.

500g Weight

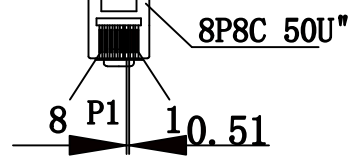

注意:

1. L1为我司下料长度;
2. L2为吊重500g所需达到长度;
3. 打曲线时请按我司下料长度L1打曲线.

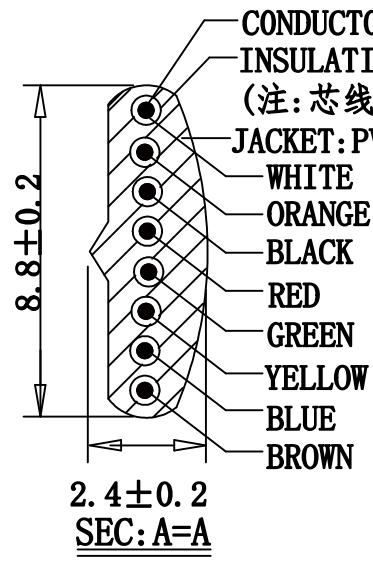

CONDUCTOR: [26AWG (0.12X12) BARE COPPER] X8C
 INSULATION: (PP6331 ID: 0.95-1.0) X8C
 (注: 芯线ID为0.95以上但不可超过1.0)
 JACKET: PVC NOUL 80P (弹性料) TOTM配方

| P1 | COLOR |
|----|--------|
| 1 | WHITE |
| 2 | ORANGE |
| 3 | BLACK |
| 4 | RED |
| 5 | GREEN |
| 6 | YELLOW |
| 7 | BLUE |
| 8 | BROWN |

NOTE FOR PLUG:
 MATERIAL: HOUSING-POLYCARBONATE, CLEAR.
 TERMINAL-0.36 [.014] THICK PHOSPHOR BRONZE.
 THICK GOLD IN LOCALIZED GOLD PLATE.
 AREA, GOLD FLASH OVER THE REMAINDER.
 OVER 2.54um [.000100] THICK NICKEL
 UNDERPLATE.

| PART NO | DRAWING NO | BUYER COLOR | VENDOR COLOR | CUSTOMER Accepted ("L2") | Retracted Length ("L3") | CUT LENGTH "L1" |
|----------------------|------------|-------------|--------------|--------------------------|-------------------------|-----------------|
| 523-26-8800-WH-0005F | A | White | W-103 LIGHT | 5.0FT-5.75FT | 700 ± 50 | 2900-3000 |
| 523-26-8800-WH-0007F | B | White | W-103 LIGHT | 7.0FT-8.05FT | 1000 ± 50 | 4000-4200 |
| 523-26-8800-WH-0010F | C | White | W-103 LIGHT | 10.0FT-11.5FT | 1500 ± 50 | 5900-6100 |
| 523-26-8800-WH-0012F | D | White | W-103 LIGHT | 12.0FT-13.8FT | 1650 ± 50 | 7000-7200 |
| 523-26-8800-WH-0014F | E | White | W-103 LIGHT | 14.0FT-16.1FT | 1900 ± 50 | 7600-7800 |
| 523-26-8800-WH-0025F | F | White | W-103 LIGHT | 25.0FT-28.75FT | 3200 ± 50 | 14300-14500 |

| REVISE | VERSION | BASIS | CONTENTS |
|----------|---------|--------|-------------|
| 12-02-20 | A/0 | T0210A | NEW DRAWING |
| | | | |
| | | | |
| | | | |

| CnC Tech, LLC | |
|---|----------------------|
| Industrial Cable and Connector Technology | |
| IDRAWING NO: 671-342 | CUSTOMER: L-671 |
| ITEM NO: 8C COILD CORD P+O PLUG | UNIT: mm |
| DATE: 2012-02-20 | ISSUE (A/0) |
| DRAWN: _____ | QA: _____ |
| SALES DEPT: _____ | SALES MANAGER: _____ |