TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	1

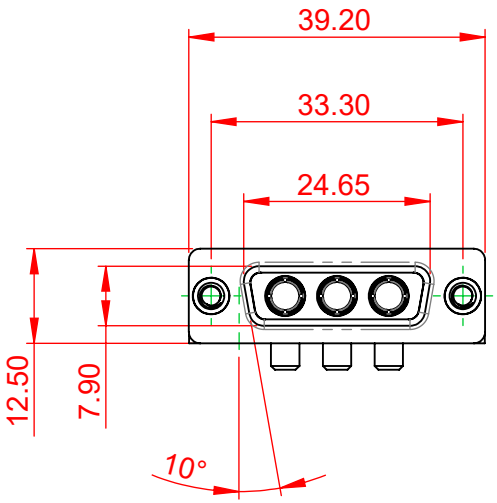



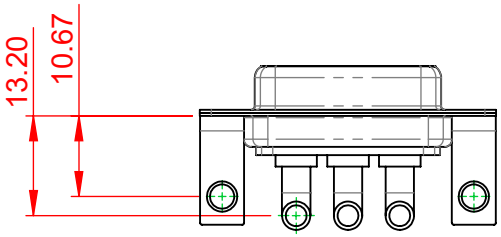

NOTES:

MATERIAL:	
HOUSING:	THERMOPLASTIC POLYESTER, UL94V-0
SHELL:	STEEL, NICKEL PLATED
CONTACT:	COPPER ALLOY, GOLD FLASH PLATED
OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	40A (CURRENT)
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.
DIELECTRIC WITHSTANDING VOLTAGE:	1000V AC rms



RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMBINATION D-SUB

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

SW REFERENCE NO.:	630 COMBO ASSEMBLY		
DRAWN: C.B		DATE: JAN. 01/2019	
CHECKED:		DATE:	
SCALE: (IN C.A.D. 1:1)		SHEET 1 OF 2	
DRAWING NUMBER:	630-3W3-240-4NC		ISSUE 1
PART NUMBER:	630-3W3-240-4NC		

TOLERANCE UNLESS OTHERWISE SPECIFIED	
.X	±0.25
.XX	±0.13
.XXX	±0.05

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

ISSUE NUMBER	
ORIGINAL	1

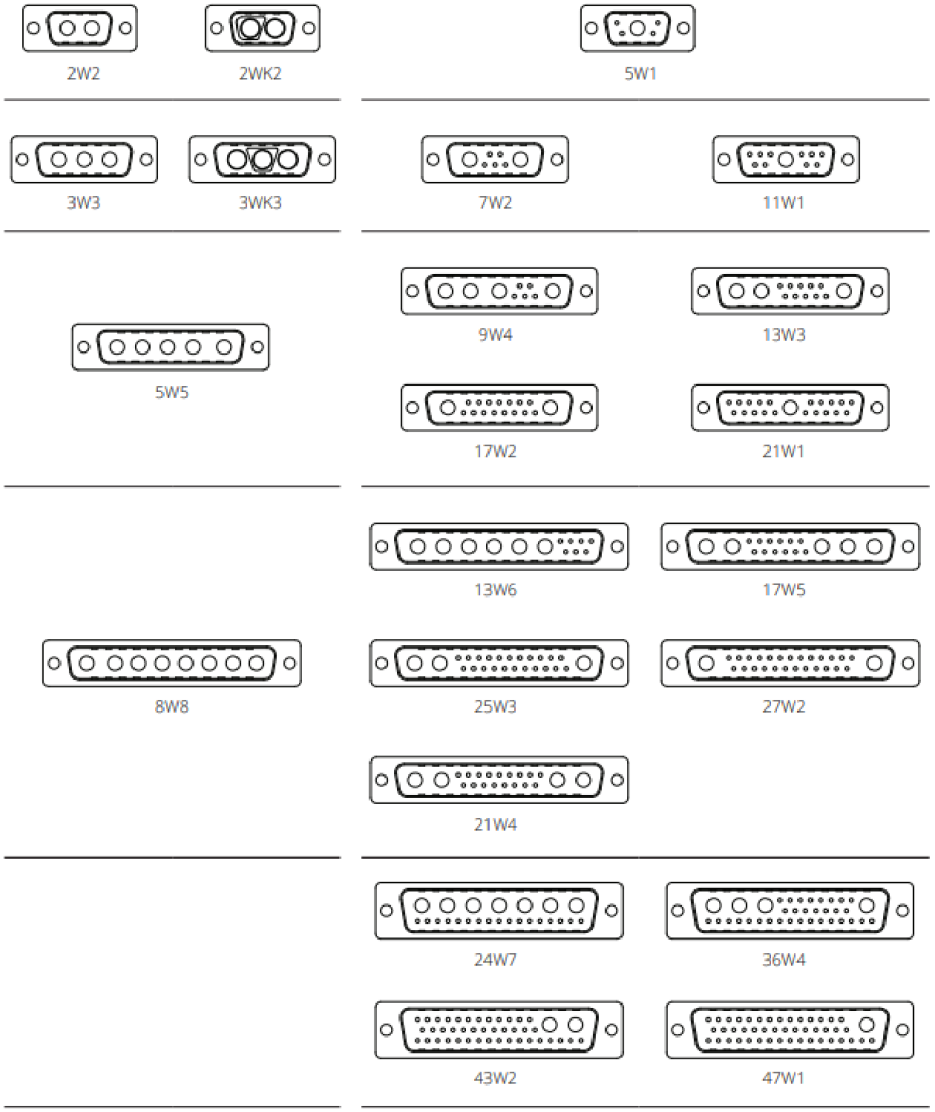

COMBINATION D-SUB

SW REFERENCE NO.:	630 COMBO ASSEMBLY
DRAWN: C.B	DATE: JAN. 01/2019
CHECKED:	DATE:
SCALE: N.T.S	SHEET 2 OF 2
DRAWING NUMBER: 630-3W3-240-4NC	ISSUE 1
PART NUMBER: 630-3W3-240-4NC	

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.