

Surface Mount RF Transformer

TC4-11G2+

50Ω 2 to 1100 MHz



Generic photo used for illustration purposes only
CASE STYLE: AT224-3

Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Pin Connections

PRIMARY DOT	6
PRIMARY	3
SECONDARY DOT	1
SECONDARY	3

Features

- wideband, 2 to 1100 MHz
- good return loss
- step-down autotransformer
- aqueous washable
- leadless surface mount

Applications

- cellular

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost


Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

Transformer Electrical Specifications


Ω RATIO (Primary/Secondary)	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
50/12.5	2-1100	—	2-1100	5-700

* Insertion Loss is referenced to mid-band loss, 0.4 dB typ.
Stepdown, 50 ohm primary, 5.2 pF across secondary

Outline Drawing AT224-3

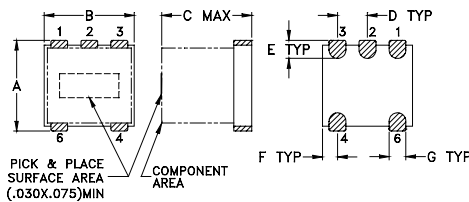

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch/mm)


A	B	C	D	E	F	G	H	J	K	wt
.150	.150	.150	.050	.030	.025					
3.81	3.81	3.81	1.27	0.76	0.64					
.028	.065	.190	.030							
0.71	1.65	4.83	0.76							0.10

Typical Performance Data


FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
1.00	0.63	20.35
5.00	0.36	31.19
50.00	0.37	40.18
100.00	0.39	36.30
300.00	0.43	26.86
500.00	0.53	21.49
700.00	0.64	18.96
800.00	0.71	18.37
1000.00	0.89	19.97
1120.00	1.10	19.69



TC4-11G2+
INSERTION LOSS

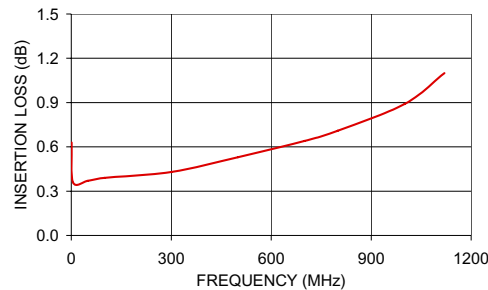

TC4-11
INPUT RETURN LOSS

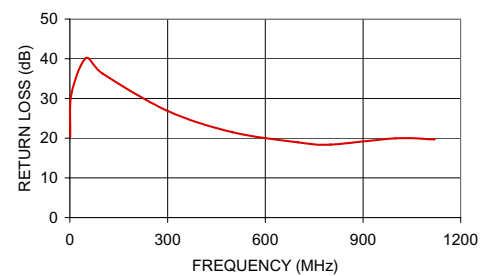

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M151107
TC4-11G2+
IG/TD/CP/AM
201120
Page 1 of 1