

# CGA5L3C0G2E153J160AE

TDK Item Description : CGA5L3C0G2E153JT\*\*S



Equivalent C3216C0G2E153J for Automotive

## Application & Main Feature

Automotive Grade ( Soft Termination )

## Series

CGA5(3216) [EIA 1206]



## Dimensions

|   |                    |
|---|--------------------|
| L | 3.20mm +0.4,-0.2mm |
| W | 1.60mm +0.3,-0.2mm |
| T | 1.60mm +0.3,-0.2mm |
| B | 0.20mm Min.        |
| G | 1.00mm Min.        |

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

2E(250Vdc)

## Capacitance

15nF

## Capacitance Tolerance

J (±5%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min


## AEC-Q200

Yes


## |Z|, ESR vs. Freq. Characteristics (Simulation Data)

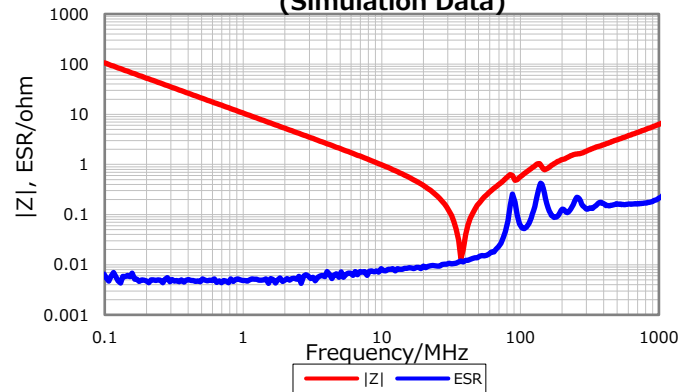


## Cap. vs. Freq. Characteristic

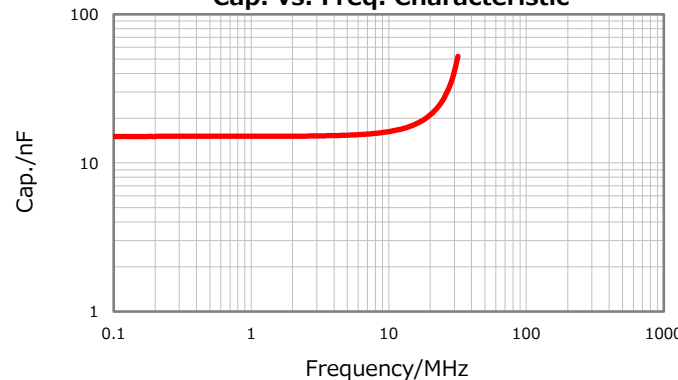


## DC Bias Characteristic

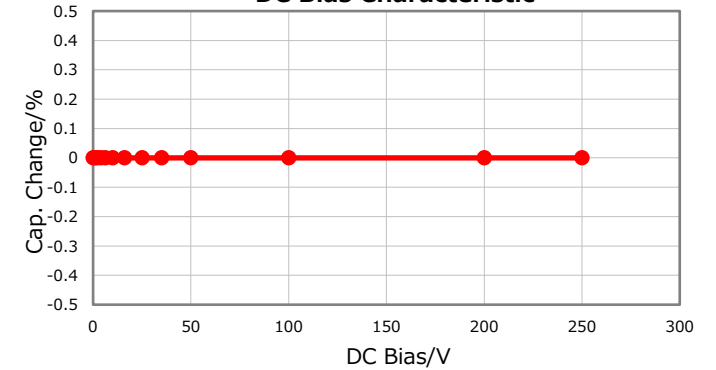

## Temperature Characteristics

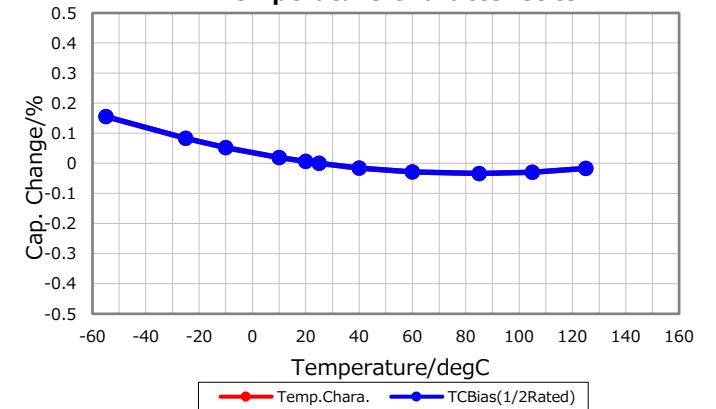

## Ripple Temperature Rise Characteristics

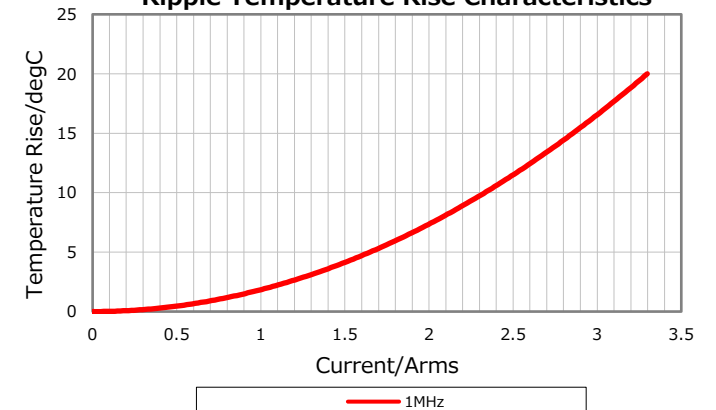

Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



All specifications are subject to change without notice.

June 24, 2019