

Connector - C-SCF 1,5/4,8X0,8 - 3240155

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Slip-on sleeve, non-insulated, 0.75 ... 1.5 mm², 4.8 x 0.8


The figure shows a version of the article

Your advantages

- ✓ They round out the product range in terms of connectors
- ✓ The uninsulated slip-on sleeves and flat plugs are made from electrolytically tin-plated brass



Key Commercial Data

Packing unit	100 pc
Minimum order quantity	100 pc
GTIN	 4 046356 453721
GTIN	4046356453721

Technical data

Dimensions

Length (b)	15.6 mm
Width (a)	4.8 mm
Maximum stripping length	7 mm
Material thickness (g)	0.4 mm

Ambient conditions

Ambient temperature (operation)	110 °C
---------------------------------	--------

General

Color	silver
Stripping length	7 mm
Components	halogen-free
Material	Brass

Connector - C-SCF 1,5/4,8X0,8 - 3240155

Technical data

General



Insulating material	nicht zutreffend
Coating	tin-plated

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

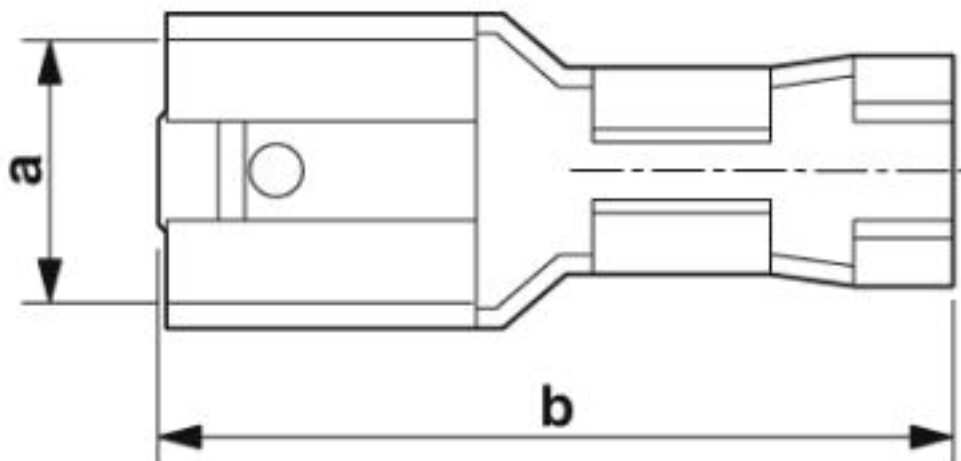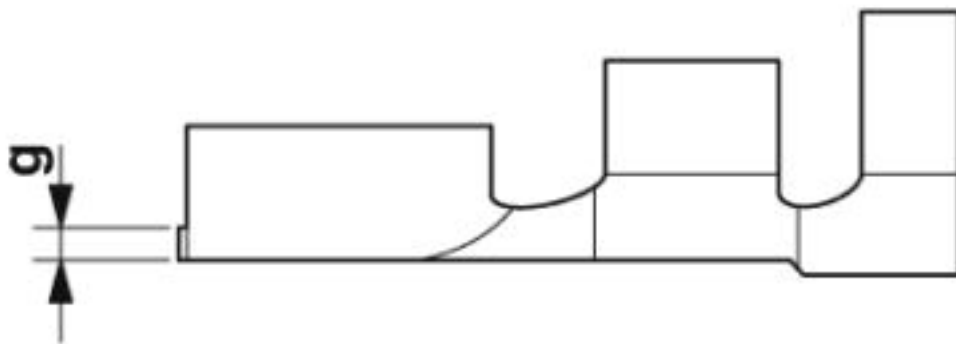

Approvals

Approvals

Connector - C-SCF 1,5/4,8X0,8 - 3240155


Approvals

Approvals

EAC / EAC

Ex Approvals

Approval details

EAC		7500651.22.01.00246
-----	---	---------------------

EAC		EAC-Zulassung
-----	---	---------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>