

# Printed-circuit board connector - PC 5/ 4-STF-SH1-7,62 - 1778191

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB connector, nominal current: 41 A, number of positions: 4, pitch: 7.62 mm, connection method: Screw connection with tension sleeve, color: green, contact surface: Tin

## Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Integrated double steel spring provides additional safety in the event of temperature and power fluctuations
- ✓ 600 V UL approval in the smallest of dimensions
- ✓ Shield for adherence to the EMC requirements and an optional strain relief
- ✓ Screwable flange for superior mechanical stability



## Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 50 pc         |
| GTIN         |               |
| GTIN         | 4046356523325 |

## Technical data

### Dimensions

|              |          |
|--------------|----------|
| Length [ l ] | 77.75 mm |
| Width [ w ]  | 38.08 mm |
| Height [ h ] | 22.9 mm  |
| Pitch        | 7.62 mm  |
| Dimension a  | 22.86 mm |

### General

|                     |                                      |
|---------------------|--------------------------------------|
| Range of articles   | PC 5/...STF1-SH                      |
| Number of positions | 4                                    |
| Connection method   | Screw connection with tension sleeve |

# Printed-circuit board connector - PC 5/ 4-STF-SH1-7,62 - 1778191

## Technical data

### General

|  |   |
|--|---|
| Insulating material group              | I   |
| Rated surge voltage (III/3)            | 8 kV  |
| Rated surge voltage (III/2)            | 8 kV  |
| Rated surge voltage (II/2)             | 6 kV  |
| Rated voltage (III/3)                  | 1000 V  |
| Rated voltage (III/2)                  | 1000 V  |
| Rated voltage (II/2)                   | 1000 V  |
| Nominal current $I_N$                  | 41 A  |
| Nominal cross section                  | 6 mm <sup>2</sup>   |
| Maximum load current                   | 41 A  |
| Insulating material                    | PA  |
| Flammability rating according to UL 94 | V0  |
| Internal cylindrical gage              | A4  |
| Stripping length                       | 10 mm   |
| Screw thread                           | M3  |
| Tightening torque, min                 | 0.5 Nm  |
| Tightening torque max                  | 0.8 Nm  |
| Note                                   | Tightening torque $\leq 4 \text{ mm}^2$ is 0.5 Nm to 0.6 Nm, $> 4 \text{ mm}^2$ is 0.7 Nm to 0.8 Nm |

### Connection data

|   |                      |
|---|----------------------|
| Conductor cross section solid min.  | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.  | 10 mm <sup>2</sup>   |
| Conductor cross section flexible min.   | 0.2 mm <sup>2</sup>  |
| Conductor cross section flexible max.   | 6 mm <sup>2</sup>    |
| Conductor cross section flexible, with ferrule without plastic sleeve min.              | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule without plastic sleeve max.              | 6 mm <sup>2</sup>    |
| Conductor cross section flexible, with ferrule with plastic sleeve min.                 | 0.25 mm <sup>2</sup> |
| Conductor cross section flexible, with ferrule with plastic sleeve max.                 | 4 mm <sup>2</sup>    |
| Conductor cross section AWG min.  | 24                   |
| Conductor cross section AWG max.  | 10                   |
| 2 conductors with same cross section, solid min.  | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid max.  | 2.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded min.                                     | 0.2 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max.                                     | 4 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.25 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 2.5 mm <sup>2</sup>  |

# Printed-circuit board connector - PC 5/ 4-STF-SH1-7,62 - 1778191

## Technical data

### Connection data

|                                 |    |
|---------------------------------|----|
| Minimum AWG according to UL/CUL | 24 |
| Maximum AWG according to UL/CUL | 8  |

### Standards and Regulations


|  |     |
|--|-----|
| Connection in acc. with standard       | CUL |
| Flammability rating according to UL 94 | V0  |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings


Diagram

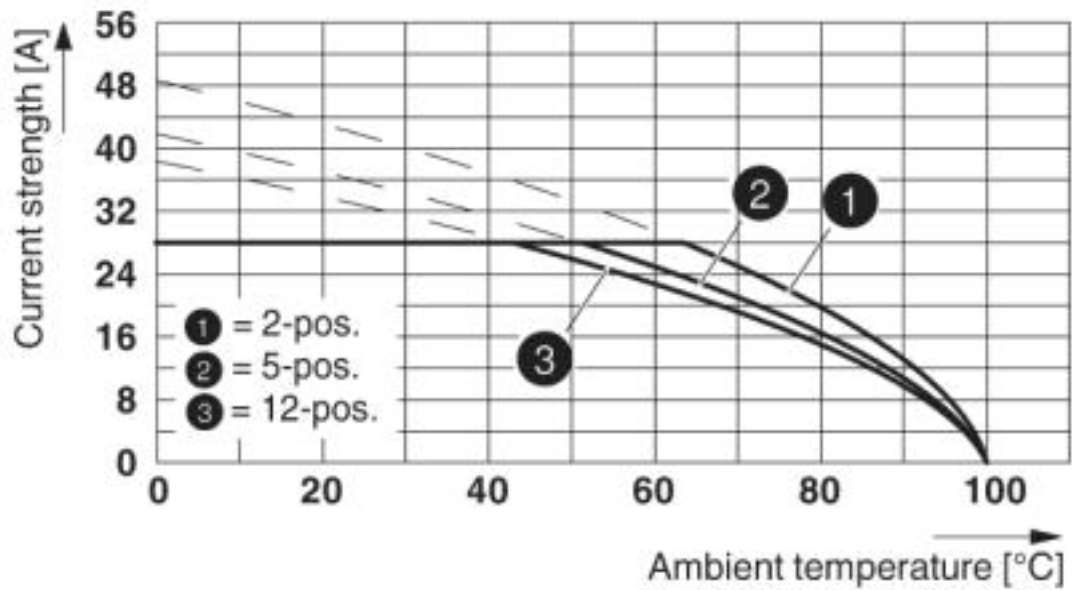

Derating curve for: PC 5/...-ST1-7,62 with PC 4/...-G-7,62  
 Conductor cross section: 4 mm<sup>2</sup>


# Printed-circuit board connector - PC 5/ 4-STF-SH1-7,62 - 1778191

Diagram

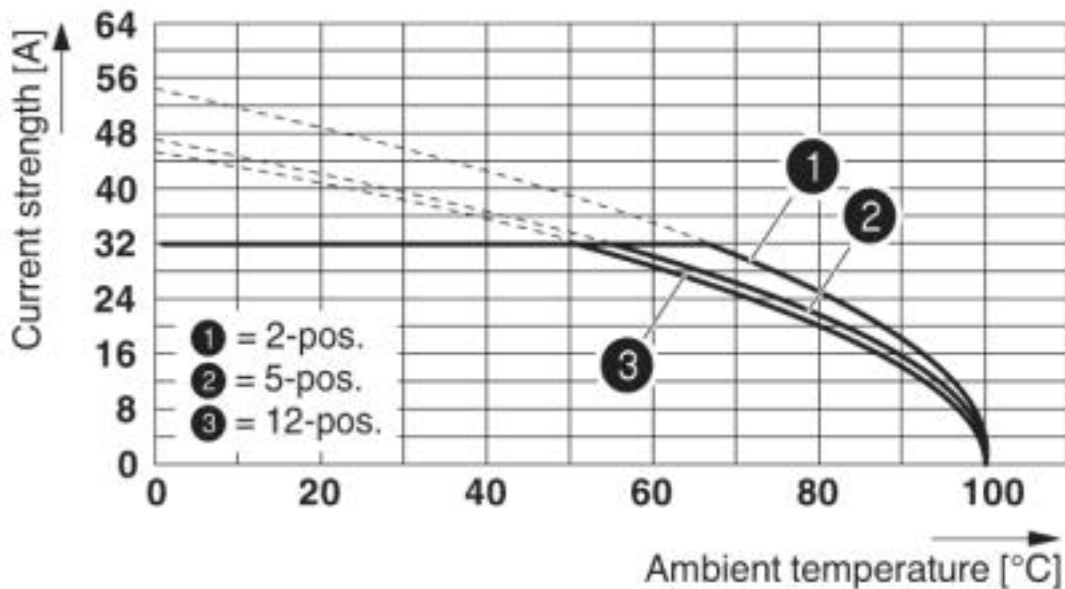

Derating curve for: PC 5/...-ST1-7,62 with PC 5/...-G-7,62  
Conductor cross section: 6 mm<sup>2</sup>


Diagram

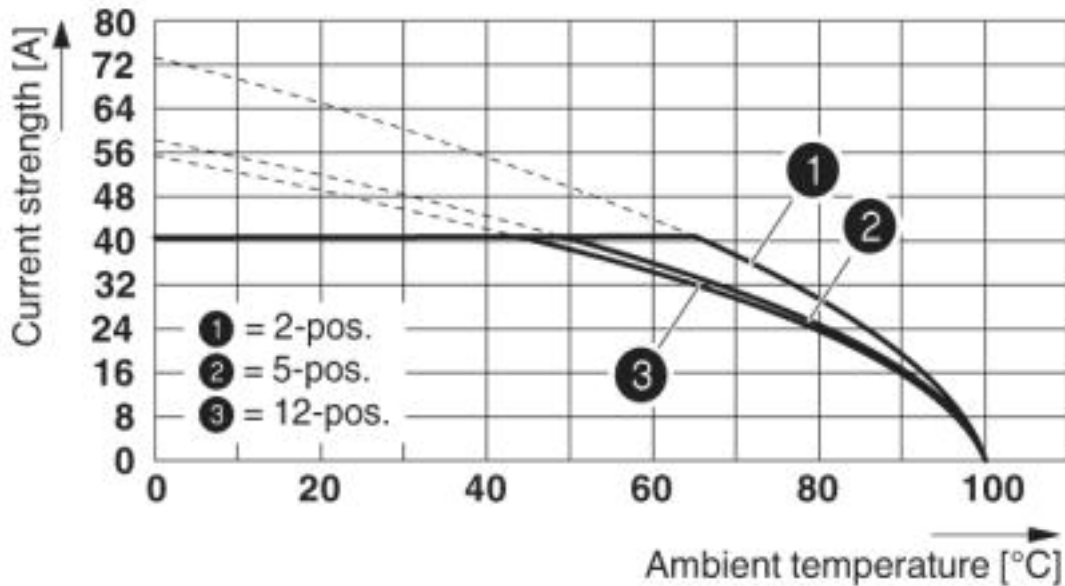

Derating curve for: PC 5/...-ST1-7,62 with PC 5/...-G-7,62  
Conductor cross section: 10 mm<sup>2</sup>

# Printed-circuit board connector - PC 5/ 4-STF-SH1-7,62 - 1778191

Dimensional drawing

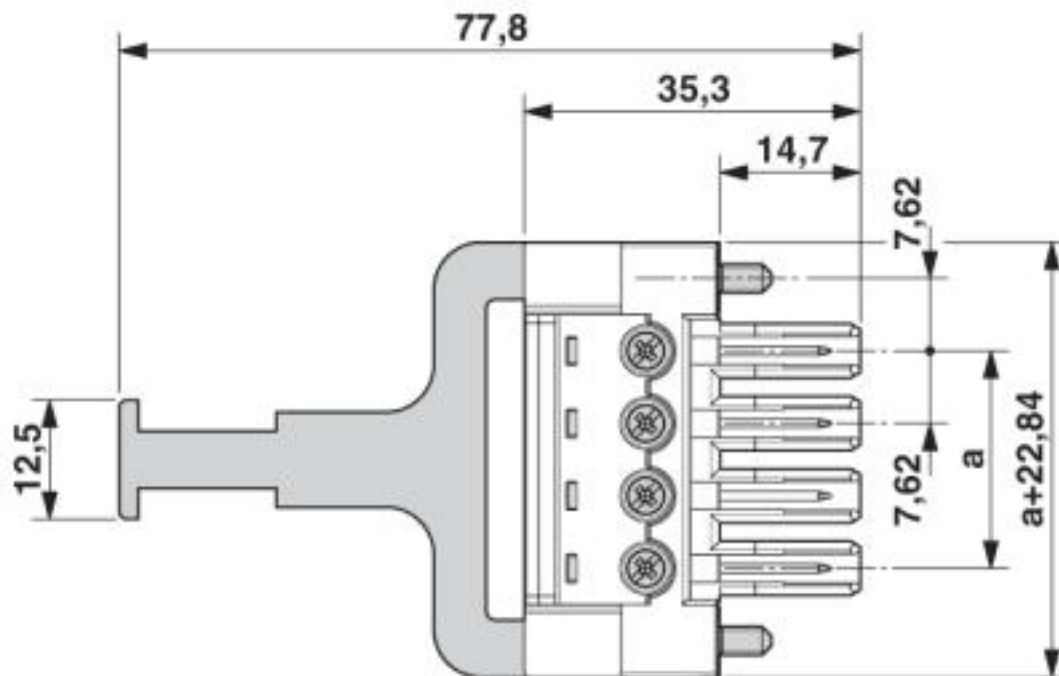

## Approvals

Approvals

Approvals

EAC / cULus Recognized

Ex Approvals

## Approval details

|     |  |         |
|-----|--|---------|
| EAC |  | B.01742 |
|-----|--|---------|

|                            |       |   |                 |
|----------------------------|-------|---|-----------------|
| cULus Recognized           |       | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19920722 |
|                            | B     | C   |                 |
| Nominal voltage UN         | 600 V | 600 V   |                 |
| Nominal current IN         | 41 A  | 41 A  |                 |
| mm <sup>2</sup> /AWG/kcmil | 24-8  | 24-8  |                 |

---

Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>