



Indicator lights, 22 mm, round, plastic, red, lens, smooth, with holder, LED module with integrated LED 110 V AC, Spring-type terminal

|  |  |
|--|--|
| <b>product brand name</b>  | SIRIUS ACT   |
| <b>product designation</b>   | Indicator lights   |
| <b>design of the product</b>   | Complete unit  |
| <b>product type designation</b>  | 3SU1   |
| <b>product line</b>  | Plastic, black, 22 mm  |
| <b>manufacturer's article number</b>   |  |
| <ul style="list-style-type: none"> <li>• of supplied LED module</li> <li>• of the supplied holder</li> <li>• of supplied repeater</li> </ul> | <a href="#">3SU1401-1BC20-3AA0</a><br><a href="#">3SU1550-0AA10-0AA0</a><br><a href="#">3SU1001-6AA20-0AA0</a> |
| <b>Enclosure</b>   |  |
| <b>number of command points</b>  | 1  |
| <b>Actuator</b>  |  |
| product extension optional light source  | Yes  |
| <b>color</b>   |  |
| <ul style="list-style-type: none"> <li>• of the actuating element</li> </ul>   | red  |
| <b>material of the actuating element</b>   | plastic  |
| <b>shape of the actuating element</b>  | round  |
| <b>outer diameter of the actuating element</b>   | 29.45 mm   |
| <b>Front ring</b>  |  |
| <b>product component front ring</b>  | No   |
| <b>Holder</b>  |  |
| <b>material of the holder</b>  | Plastic  |
| <b>Display</b>   |  |
| <b>number of LED modules</b>   | 1  |
| <b>General technical data</b>  |  |
| product component light source   | Yes  |
| insulation voltage rated value   | 320 V  |
| <b>degree of pollution</b>   | 3  |
| <b>surge voltage resistance rated value</b>  | 4 kV   |
| <b>protection class IP</b>   | IP66, IP67, IP69(IP69K)  |
| <ul style="list-style-type: none"> <li>• of the terminal</li> </ul>  | IP20   |
| <b>degree of protection NEMA rating</b>  | 1, 2, 3, 3R, 4, 4X, 12, 13   |
| <b>shock resistance</b>  |  |
| <ul style="list-style-type: none"> <li>• according to IEC 60068-2-27</li> <li>• for railway applications according to EN 61373</li> </ul>    | sinusoidal half-wave 15g / 11 ms<br>Category 1, Class B  |
| <b>vibration resistance</b>  |  |
| <ul style="list-style-type: none"> <li>• according to IEC 60068-2-6</li> <li>• for railway applications according to EN 61373</li> </ul>     | 10 ... 500 Hz: 5g<br>Category 1, Class B   |
| <b>reference code according to IEC 81346-2</b>   | P  |

|  |  |
|--|--|
| <b>Substance Prohibitance (Date)</b>                           | 10/01/2014   |
| <b>Supply voltage</b>  |  |
| type of voltage of the supply voltage of the light source      | AC   |
| <b>supply voltage of the light source at AC</b>                |  |
| • at 50 Hz rated value   | 110 V  |
| • at 60 Hz rated value   | 110 V  |
| • at 60 Hz rated value   | 110 ... 110 V  |
| <b>relative negative tolerance of the supply voltage</b>       | 20 %   |
| <b>relative positive tolerance of the supply voltage</b>       | 20 %   |
| <b>Control circuit/ Control</b>                                |  |
| <b>inrush current maximum</b>                                  | 3 A  |
| <b>Connections/ Terminals</b>                                  |  |
| <b>type of electrical connection</b>                           | other  |
| • of modules and accessories                                   | Spring-type terminal   |
| <b>type of connectable conductor cross-sections</b>            |  |
| • solid without core end processing                            | 2x (0.25 ... 1.5 mm <sup>2</sup> )   |
| • finely stranded with core end processing                     | 2x (0.25 ... 0.75 mm <sup>2</sup> )  |
| • finely stranded without core end processing                  | 2x (0.25 ... 1.5 mm <sup>2</sup> )   |
| • at AWG cables  | 2x (24 ... 16)   |
| <b>tightening torque of the screws in the bracket</b>          | 1 ... 1.2 N·m  |
| <b>Lamp</b>  |  |
| <b>type of light source</b>                                    | LED  |
| <b>color of the light source</b>                               | red  |
| <b>light intensity</b>   | 450 ... 1 120 mcd  |
| <b>Ambient conditions</b>                                      |  |
| <b>ambient temperature</b>                                     |  |
| • during operation   | -25 ... +70 °C   |
| • during storage   | -40 ... +80 °C   |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted for all devices behind front panel) |
| <b>Installation/ mounting/ dimensions</b>                      |  |
| <b>fastening method</b>  | front plate mounting   |
| • of modules and accessories                                   | Front plate mounting   |
| <b>height</b>  | 40 mm  |
| <b>width</b>   | 30 mm  |
| <b>shape of the installation opening</b>                       | round  |
| <b>mounting diameter</b>                                       | 22.3 mm  |
| <b>positive tolerance of installation diameter</b>             | 0.4 mm   |
| <b>mounting height</b>   | 11.8 mm  |
| <b>installation width</b>                                      | 29.5 mm  |
| <b>installation depth</b>                                      | 49.7 mm  |
| <b>Certificates/ approvals</b>                                 |  |
| <b>General Product Approval</b>                                | <b>Declaration of Conformity</b>   |



[Confirmation](#)



Declaration of Conformity


Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

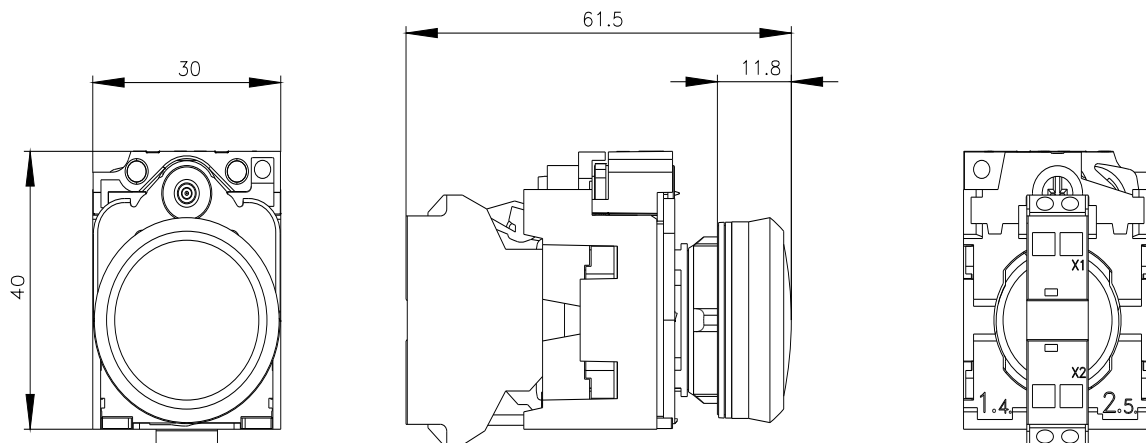

[Environmental Confirmations](#)[Confirmation](#)**Further information****Information- and Downloadcenter (Catalogs, Brochures,...)**<https://www.siemens.com/ic10>**Industry Mall (Online ordering system)**<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1103-6AA20-3AA0>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1103-6AA20-3AA0>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/3SU1103-6AA20-3AA0>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1103-6AA20-3AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1103-6AA20-3AA0&lang=en)

last modified:

1/26/2022