

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Sensor/actuator cable, 5-position, PE-X halogen-free, black, shielded, Plug straight M12 SPEEDCON, A-coded, on free cable end, cable length: 5 m, For railway applications

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ Safety thanks to flame retardancy: PA 6.6 grip and radiation-cross-linked cables satisfy the most stringent requirements
- ✓ Securely locked by special vibration brake
- ✓ Resistant to temperature influences – tested for an extended temperature range and for resistance to temperature shocks
- ✓ Reliable signal transmission – 360° shielding in environments with electromagnetic interference



Key Commercial Data

| | |
|--------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 774420 |
| GTIN | 4046356774420 |

Technical data

Dimensions

| | |
|-----------------|-----|
| Length of cable | 5 m |
|-----------------|-----|

Ambient conditions

| | |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -40 °C ... 85 °C (Plug / socket) |
| Degree of protection | IP65 |

General

| | |
|-----------------------|---|
| Note | Further products with variable cable type and variable cable length can be found in the accessories section |
| Rated current at 40°C | 4 A |
| Rated voltage | 48 V AC |
| | 60 V DC |
| Number of positions | 5 |

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Technical data

General

| | |
|------------------------------|-------------------------------|
| Color handle area | black |
| Insulation resistance | ≥ 100 MΩ |
| Coding | A - standard |
| Standards/regulations | M12 connector IEC 61076-2-101 |
| | Shock, vibration EN 50155 |
| Status display | No |
| Protective circuit/component | unwired |
| Overvoltage category | II |
| Degree of pollution | 3 |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.4 Nm (M12 connector) |

Material

| | |
|--------------------------|---|
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | PA 6.6 |
| Material of grip body | PA 6.6 |
| Material, knurls | Zinc die-cast, nickel-plated |
| Standards/regulations | PA 6.6: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |

Standards and Regulations

| | |
|-----------------------|------------------|
| Standard designation | M12 connector |
| Standards/regulations | IEC 61076-2-101 |
| Standard designation | Shock, vibration |
| Standards/regulations | EN 50155 |

Cable

| | |
|---|---|
| Cable type | Shielded black RADOX® |
| Cable type (abbreviation) | 28R |
| Conductor cross section | 5x 0.5 mm ² |
| AWG signal line | 20 |
| Conductor structure signal line | 19x 0.18 mm |
| Core diameter including insulation | 1.43 mm |
| Wire colors | White 1, white 2, white 3, white 4, white 5 |
| Overall twist | 5 cores, twisted |
| Shielding | Tinned copper braided shield |
| External sheath, color | black |
| External cable diameter D | 6.2 mm ±0,3 mm |
| Minimum bending radius, fixed installation | 3 x D |
| Minimum bending radius, flexible installation | 4 x D |
| Cable weight | 70 kg/km |

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Technical data

Cable

| | |
|----------------------------------|--|
| Outer sheath, material | PE-X |
| Material conductor insulation | PE-X |
| Conductor material | Tin-plated Cu litz wires |
| Conductor resistance | ≤ 40.1 Ω/km |
| Nominal voltage, cable | 600 V AC (Core-ground, U ₀) |
| | 1000 V AC (Core-ground, U) |
| | ≤ 720 V AC (core-ground) |
| | ≤ 1200 V AC (Core-ground, U _m) |
| | ≤ 900 V DC (Core-ground, V ₀) |
| | ≤ 1500 V DC (core-core) |
| Test voltage, cable | 3500 V AC (50 Hz, 5 min.) |
| | 8400 V DC (50 Hz, 5 min.) |
| Fire protection in rail vehicles | BS 6853 (Category Ia, Ib, II) |
| | GM/RT 2130 (Category Ia, Ib, II) |
| | EN 45545 (Risk level HL1 - HL3) |
| | DIN 5510 (Fire protection level 1, 2, 3, 4) |
| | NF F16-101 (Category A1, A2, B) |
| | NF F16-101 (Class C/F0) |
| | NFPA 130 |
| | UNI CEI 11170 (Risk level LR1 - LR4) |
| Flame resistance | EN 60332-1-2 |
| | EN 50266 |
| | EN 60332-3-25 |
| | NF C32-070, 2.1 |
| | NF C32-070, 2.2 |
| | UL 1685, 12 (FT4) |
| | in accordance with ISO 6722-1 5.22 (UN ECE-R 118.01) |
| Halogen-free | According to EN 50267-2-1 |
| Resistance to oil | according to IRM 902, 72 h at 100 °C |
| Other resistance | Resistance to fuels according to IRM 903, 168 h at 70 °C |
| Concentration of fumes | BS 6853 D.8.7 |
| | EN 61034-2 |
| | UL 1685, 12 (FT4) |
| Fume corrosiveness | EN 50267-2-2 |
| Fume toxicity | BS 6853 B.1 |
| | EN 50305, 9.2 |
| Ambient temperature (operation) | -50 °C ... 120 °C (cable, fixed installation) |
| | -25 °C ... 90 °C (cable, flexible installation) |

Environmental Product Compliance

| | |
|------------|--|
| China RoHS | Environmentally Friendly Use Period = 50 |
|------------|--|

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326


Technical data

Environmental Product Compliance

| | |
|--|---|
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|---|


Drawings

Dimensional drawing

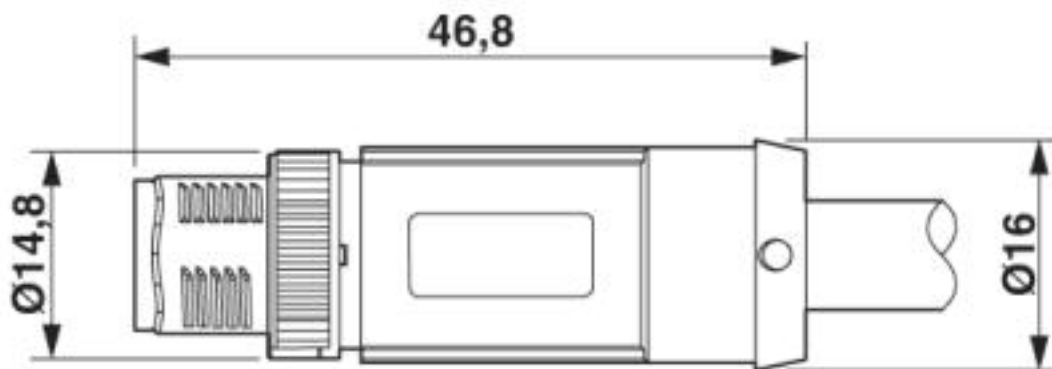

M12 SPEEDCON plug, straight, shielded

Circuit diagram

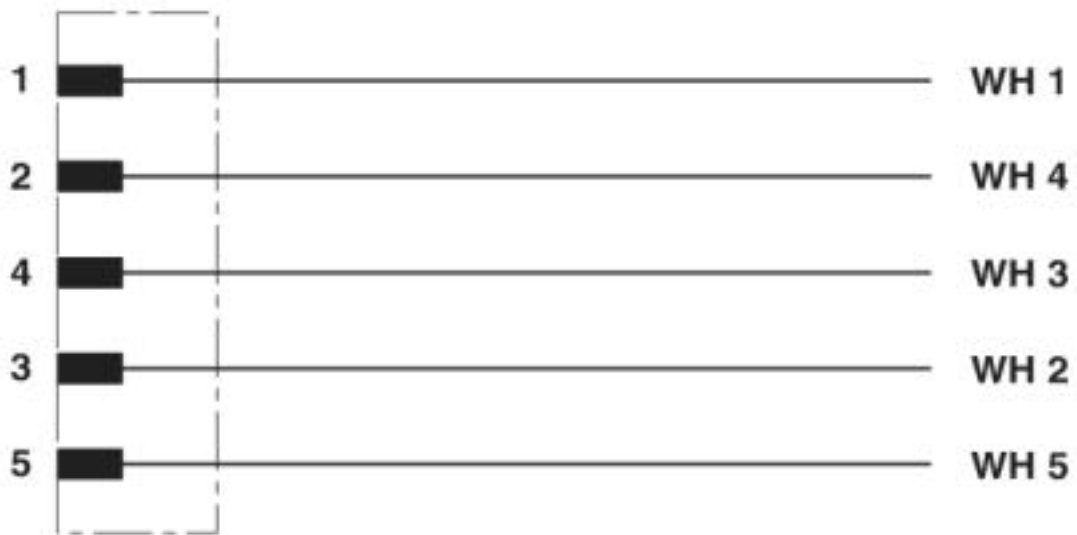

Contact assignment of the M12 plug

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Schematic diagram



Pin assignment M12 male connector, 5-pos., A-coded, male side

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Cable cross section



Shielded black RADOX® [28R]

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

Sensor/actuator cable - SAC-5P-MS/ 5,0-28R SCO RAIL - 1407326

Approvals

EAC



RU C-
DE.BL08.B.00286

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>